



Installation of slim-size ITX mainboard & 3.5" HDD (optional MK-35DV will be needed)

1. Open the chassis and install the I/O shield and DC-DC power cable (color: black/yellow) which you need to take out of the PSU package.

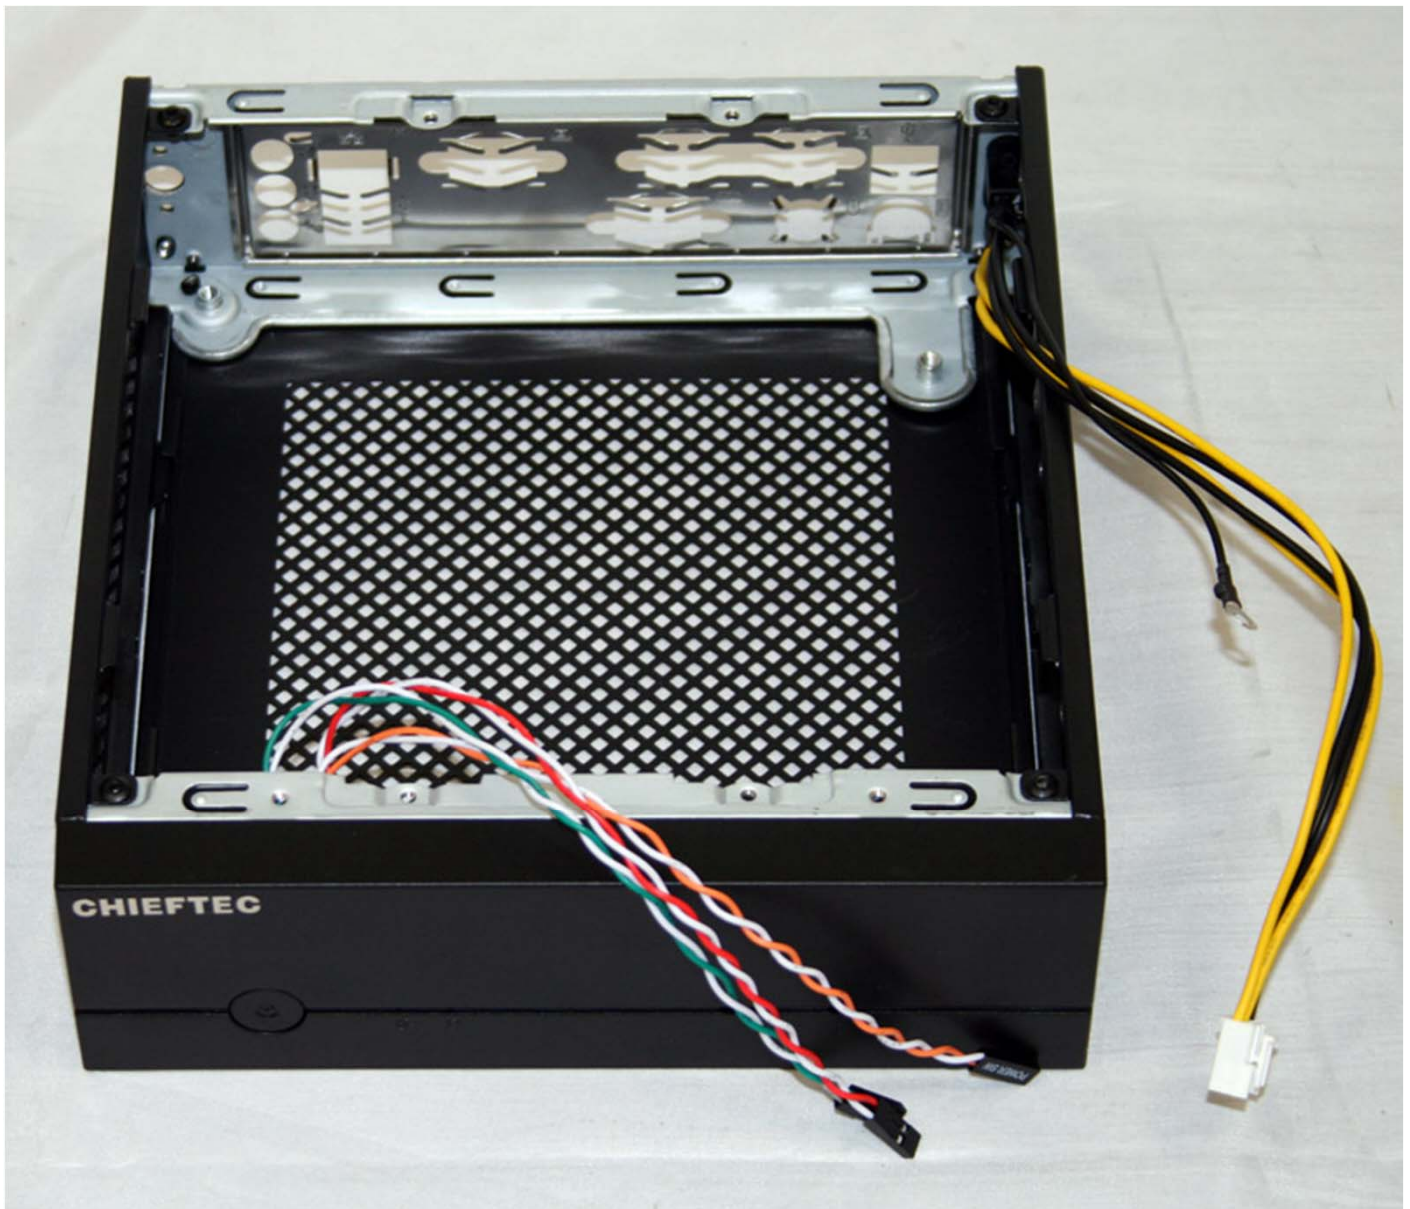


The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

2. Install the mainboard

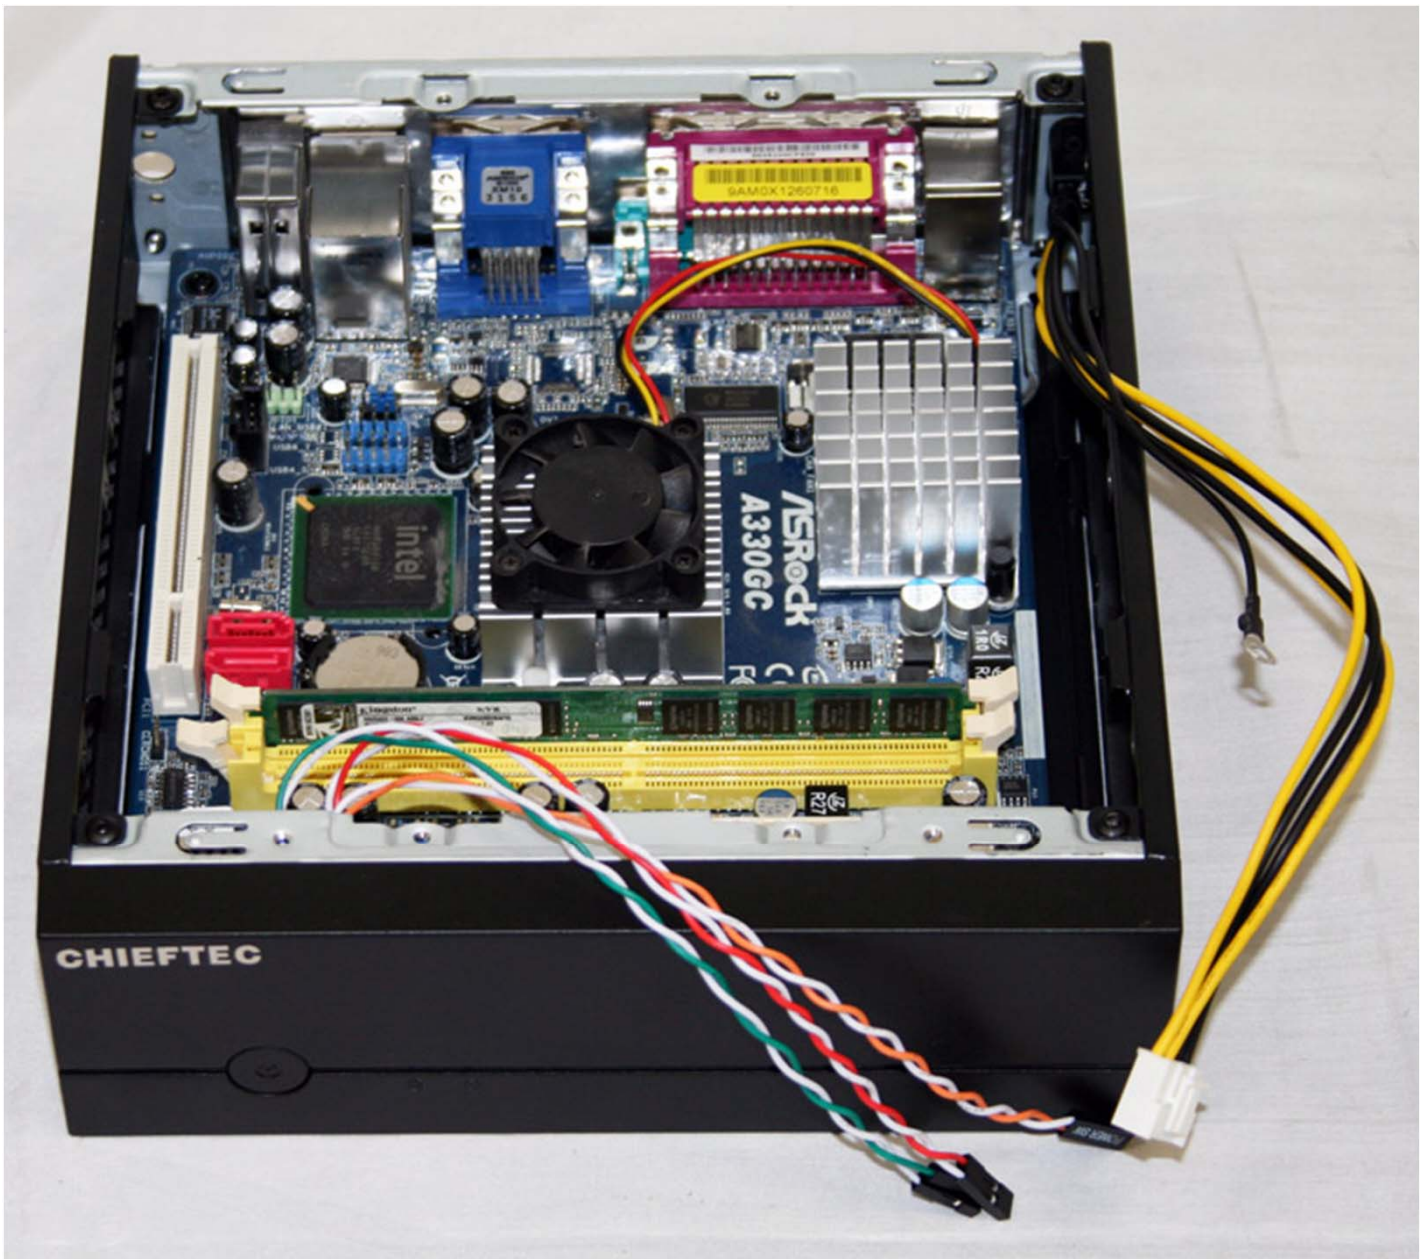

The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

3. Screw two distance holders which can be found in the accessory bag of the chassis

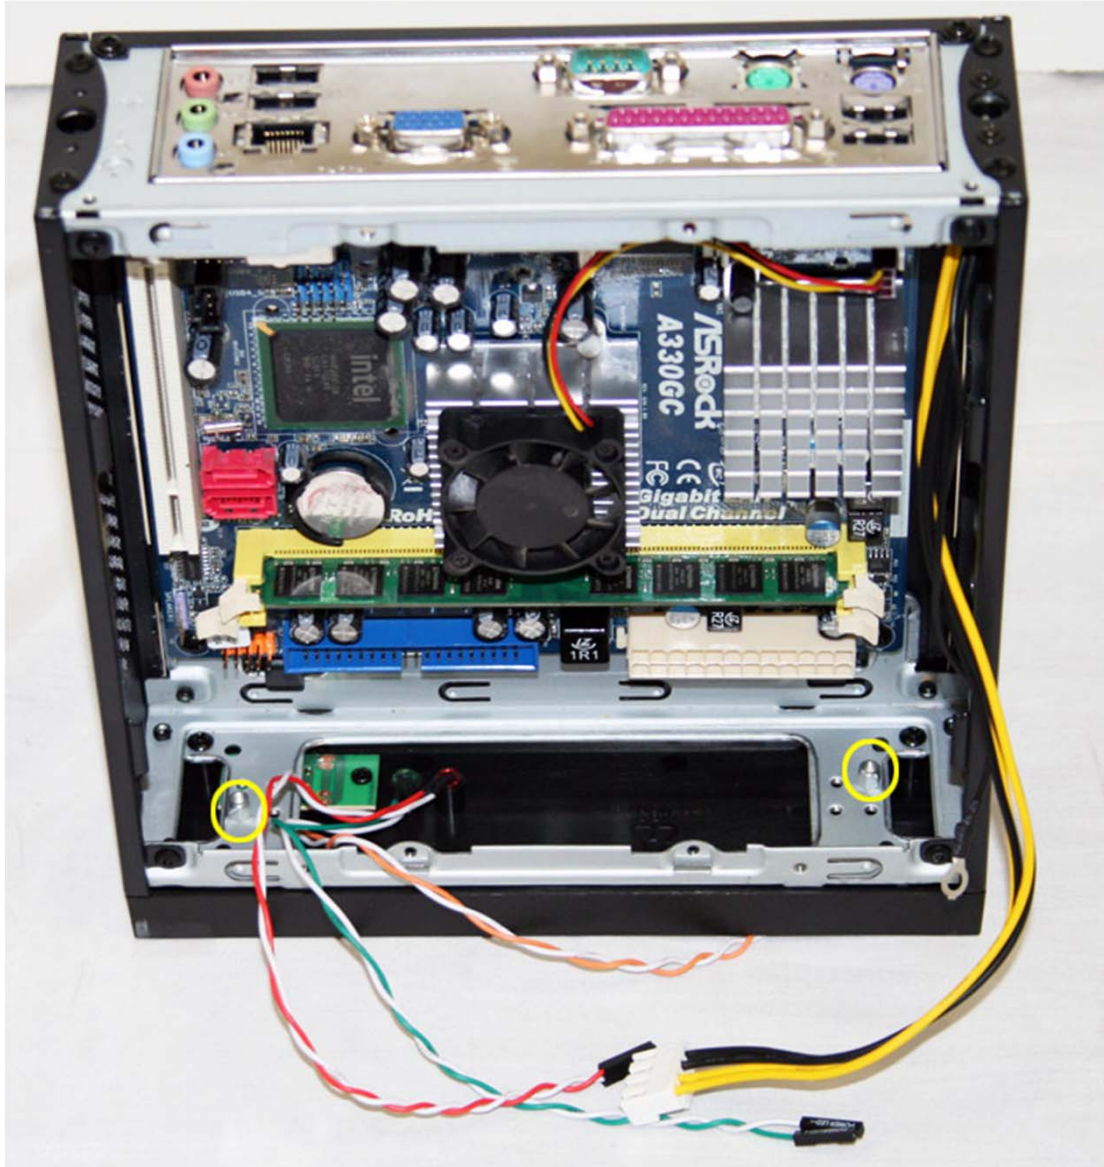

Distance holder for the DC-DC board



The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

4. Screw the DC-DC board on each side. After that please connect the 4PIN DC-DC power cable (color: black/yellow) with the DC-DC board




The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

5. Please connect the DC-DC grounding cable with the mainboard screw.



The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

6. Please connect 24PIN power cable with the mainboard & DC-DC board.

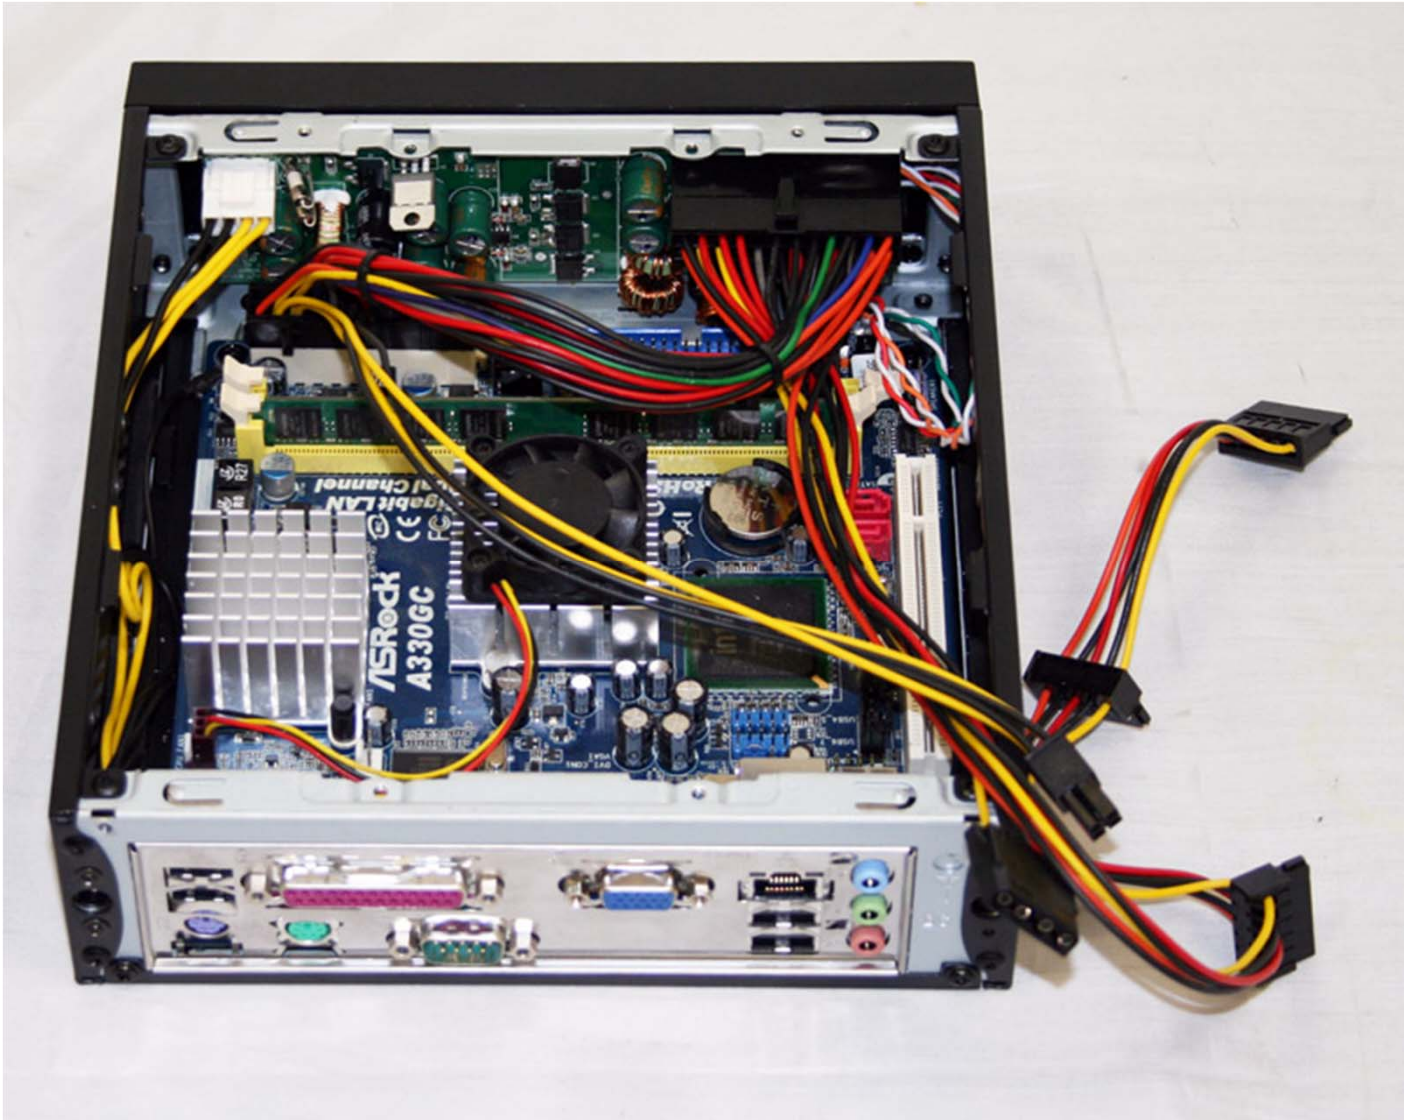


The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

6. Fix the 20mm metal pins into the 4 holes of the chassis.



The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

7. Fix 1 x 3,5" HDD and 1 x 2.5" HDD

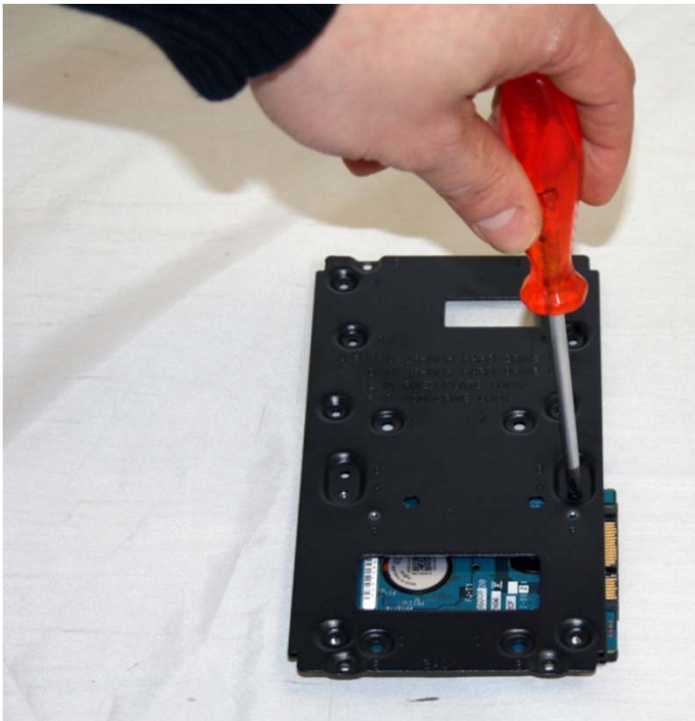

The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

8. Screw the HDD holder onto the 4 metal pins.



The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.

9. Close and screw the chassis. You are done.



Have fun with your new IX-01B mini ITX chassis from CHIEFTEC!

The listed specifications may be altered at any point in time without any pre-notice. Chieftec® is a registered trade mark. All other brands and/or logos are property of the respective owners.