

# Dell Pro Max 16

MC16255

Owner's Manual

## Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

# Contents

<b>Chapter 1: Views of Dell Pro Max 16 MC16255.....</b>	<b>7</b>
Left.....	7
Right.....	8
Top.....	9
Front.....	10
Bottom.....	11
Locate the Service Tag or Express Service Code label of your computer.....	11
Battery-status light.....	12
<b>Chapter 2: Set up your Dell Pro Max 16 MC16255.....</b>	<b>13</b>
<b>Chapter 3: Specifications of Dell Pro Max 16 MC16255.....</b>	<b>15</b>
Dimensions and weight.....	15
Processor.....	15
Chipset.....	16
Operating system.....	16
Memory.....	16
External ports and slots.....	17
Internal slots.....	17
Ethernet.....	17
Wireless module.....	18
Audio.....	18
Storage.....	19
Media-card reader.....	19
Keyboard.....	19
Keyboard shortcuts of Dell Pro Max 16 MC16255.....	20
Camera.....	21
Touchpad.....	22
Power adapter.....	22
Power adapter requirements of Dell Pro Max 16 MC16255.....	23
Battery.....	24
Power requirements (for computers shipped with 4-cell, 64 Wh battery).....	25
Power requirements (for computers shipped with 6-cell, 96 Wh battery) .....	25
Display.....	26
Fingerprint reader (optional).....	27
Sensors .....	27
GPU—Integrated.....	28
GPU—Discrete.....	28
Multiple display support matrix.....	28
Hardware security.....	29
Smart-card reader.....	29
Contactless smart-card reader.....	29
Contacted smart-card reader.....	32
Operating and storage environment.....	33


ComfortView Plus.....	33
Dell Optimizer.....	34
<b>Chapter 4: Working inside your computer.....</b>	<b>35</b>
Safety instructions.....	35
Before working inside your computer.....	35
Safety precautions.....	36
Electrostatic discharge—ESD protection.....	36
ESD Field Service kit .....	37
Transporting sensitive components.....	38
After working inside your computer.....	38
BitLocker.....	38
Recommended tools.....	39
Screw list.....	39
Major components of Dell Pro Max 16 MC16255.....	40
Customer Replaceable Units (CRUs) and Field Replaceable Units (FRUs) list.....	42
<b>Chapter 5: Removing and installing Customer Replaceable Units (CRUs).....</b>	<b>43</b>
Base cover.....	43
Removing the base cover.....	43
Installing the base cover.....	46
Battery.....	48
Rechargeable Li-ion battery precautions.....	48
Removing the battery .....	49
Installing the battery .....	50
Battery cable.....	50
Disconnecting the battery cable .....	50
Connecting the battery cable .....	51
Solid-state drive.....	52
Removing the M.2 2230 solid state drive.....	52
Installing the M.2 2230 solid state drive.....	52
Removing the M.2 2280 solid state drive.....	53
Installing the M.2 2280 solid state drive.....	54
Wireless card.....	55
Removing the wireless card .....	55
Installing the wireless card .....	56
Speakers.....	58
Removing the speakers .....	58
Installing the speakers .....	59
Right/Processor fan.....	60
Removing the right/processor fan .....	60
Installing the right/processor fan .....	61
Left/Video fan.....	62
Removing the left/video fan .....	62
Installing the left/video fan .....	63
<b>Chapter 6: Removing and installing Field Replaceable Units (FRUs).....</b>	<b>65</b>
Heat sink.....	65
Removing the heat sink.....	65

Installing the heat sink.....	66
GPU filler.....	67
Removing the GPU filler.....	67
Installing the GPU filler.....	68
Battery frame.....	69
Removing the battery frame.....	69
Installing the battery frame.....	70
USH board.....	71
Removing the USH board.....	71
Installing the USH board.....	72
Smart-card reader.....	73
Removing the smart-card reader.....	73
Installing the smart-card reader.....	74
Display assembly.....	75
Removing the display assembly .....	75
Installing the display assembly .....	78
Display bezel.....	82
Removing the display bezel .....	82
Installing the display bezel .....	86
Display panel.....	87
Removing the display panel .....	87
Installing the display panel .....	90
Display hinges.....	93
Removing the display hinges .....	93
Installing the display hinges .....	94
Display cable.....	95
Removing the display cable .....	95
Installing the display cable .....	96
Camera.....	98
Removing the camera .....	98
Installing the camera .....	98
Display back-cover and antenna assembly.....	99
Removing the display back-cover and antenna assembly .....	99
Installing the display back-cover and antenna assembly .....	100
System board.....	102
Removing the system board .....	102
Installing the system board .....	104
USB Type-C module.....	107
Removing the USB Type-C module.....	107
Installing the USB Type-C module .....	108
Power button.....	109
Removing the power button .....	109
Installing the power button .....	110
Keyboard.....	111
Removing the keyboard.....	111
Installing the keyboard .....	114
Palm-rest assembly.....	116
Removing the palm-rest assembly .....	116
Installing the palm-rest assembly .....	117

<b>Chapter 7: Software.....</b>	<b>119</b>
Operating system.....	119
Drivers and downloads.....	119
<b>Chapter 8: BIOS Setup.....</b>	<b>120</b>
Entering BIOS Setup program.....	120
Navigation keys.....	120
F12 One Time Boot menu.....	120
View Advanced Setup options.....	121
View Service options.....	121
BIOS Setup options.....	121
Updating the BIOS.....	139
Updating the BIOS in Windows.....	139
Updating the BIOS in Linux and Ubuntu.....	140
Updating the BIOS using the USB drive in Windows.....	140
Updating the BIOS from the One-Time boot menu.....	141
System and setup password.....	141
Assigning a System Setup password.....	141
Deleting or changing an existing system password or setup password.....	142
Clearing system and setup passwords.....	142
<b>Chapter 9: Troubleshooting.....</b>	<b>143</b>
Handling swollen rechargeable Li-ion batteries.....	143
Dell SupportAssist Pre-boot System Performance Check diagnostics.....	143
Running the SupportAssist Pre-Boot System Performance Check.....	144
Built-in self-test (BIST).....	144
Motherboard Built-In Self-Test (M-BIST).....	144
Logic Built-in Self-test (L-BIST).....	145
LCD Built-in Self-Test (LCD-BIST).....	145
System-diagnostic lights.....	145
Recovering the operating system.....	146
Real-Time Clock (RTC Reset).....	147
Backup media and recovery options.....	147
Network power cycle.....	147
Drain flea power (perform hard reset).....	147
<b>Chapter 10: Getting help and contacting Dell.....</b>	<b>149</b>
<b>Chapter 11: Revision history.....</b>	<b>150</b>

# Views of Dell Pro Max 16 MC16255

## Left

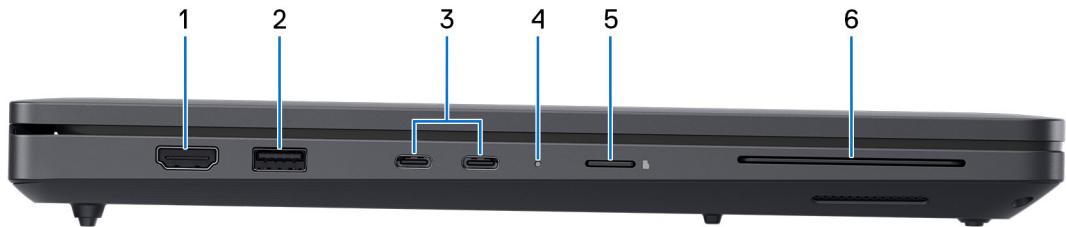

**Figure 1. Left view**

### 1. HDMI 2.1 port

Connect to a TV, external display, or another HDMI-in enabled device. Provides video and audio output.

### 2. USB 3.2 Gen 1 (5 Gbps) port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

### 3. Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort

Supports USB4, DisplayPort 2.1, Thunderbolt 4 and also enables you to connect to an external display using a display adapter. Provides data transfer rates of up to 40 Gbps for USB4 and Thunderbolt 4.

**i** **NOTE:** The power adapter is to be connected to one of these Thunderbolt 4 ports.

**i** **NOTE:** You can connect a Dell Docking Station to the Thunderbolt 4 ports. For more information, search in the Knowledge Base Resource at [Dell Support Site](#).

**i** **NOTE:** A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

**i** **NOTE:** USB4 is backward compatible with USB 3.2, USB 2.0, and Thunderbolt 3.

**i** **NOTE:** Thunderbolt 4 supports two 4K displays or one 8K display.

### 4. Power and battery-status light

Indicates the power state and battery state of the computer.

**Solid white**—Power adapter is connected and the battery is charging.

**Solid amber**—Computer is running on battery and the battery charge is low or critical.

**Off**—Power adapter is disconnected or the battery is fully charged.

**i** **NOTE:** On certain computer models, the power and battery-status light are also used for diagnostics. For more information, see the *Troubleshooting* section in this document.

### 5. microSD-card slot

Reads from and writes to the microSD-card.

## 6. Smart-card reader slot (optional)

Reads information from a smart card with a built-in-chip.

# Right



**Figure 2. Right view**

### 1. Global headset port

Connect headphones or a headset (headphone and microphone combo).

### 2. USB 3.2 Gen 1 (5 Gbps) port with PowerShare

Connect devices such as external storage devices and printers.

Provides data transfer speeds up to 5 Gbps. PowerShare enables you to charge your USB devices even when your computer is turned off.

**i** **NOTE:** If your computer is turned off or in a hibernation state, you must connect the power adapter to charge your devices using the PowerShare port. You must enable this feature in the BIOS setup program.

**i** **NOTE:** Certain USB devices may not charge when the computer is turned off or in a sleep state. In such cases, turn on the computer to charge the device.

### 3. RJ45 ethernet port (1 Gbps)

Connect an RJ45 ethernet cable from a router or a broadband modem for network or Internet access, with a transfer rate of 10/100/1000 Mbps (maximum 1 Gbps).

### 4. Security-cable slot (wedge-shaped)

Connect a security cable to prevent unauthorized movement of your computer.

# Top




**Figure 3. Top view**

## 1. Power button with optional fingerprint reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for ten seconds to force shut-down the computer.

If the power button has a fingerprint reader, place your finger on the power button to log in.

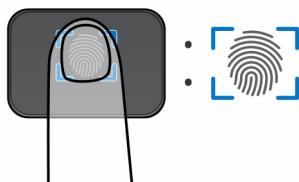

**Figure 4. Active area of the fingerprint reader**


**NOTE:** The highlighted area indicates the actual active fingerprint reader area, and the image is for illustration purposes only.

**NOTE:** You can customize power-button behavior in Windows. For more information, see [Manuals at Dell Support Site](#).

## 2. Precision touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

# Front

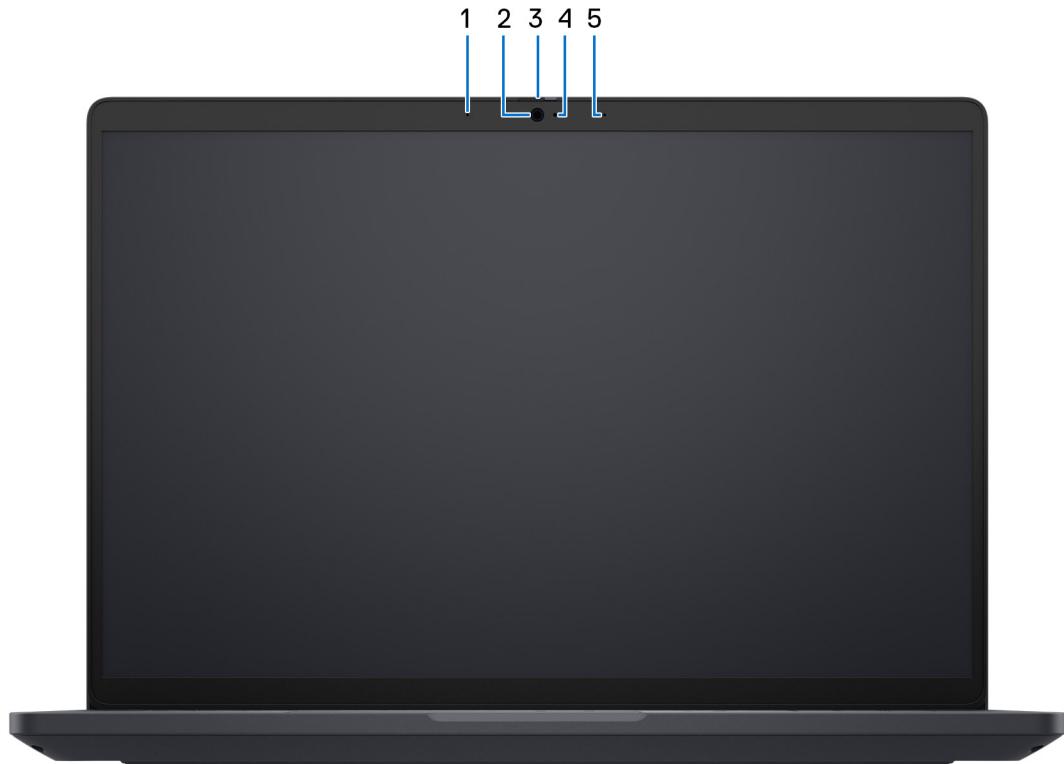

**Figure 5. Front view**

**1. Left microphone**

Provides digital sound input for audio recording and voice calls.

**2. Camera**

A camera enables you to video chat, capture photos, and record videos.

**3. Privacy shutter**

Slide the privacy shutter to cover the camera lens and protect your privacy when the camera is not in use.


**4. Camera-status light**

Turns on when the camera is in use.

**5. Right microphone**

Provides digital sound input for audio recording and voice calls.

## Bottom

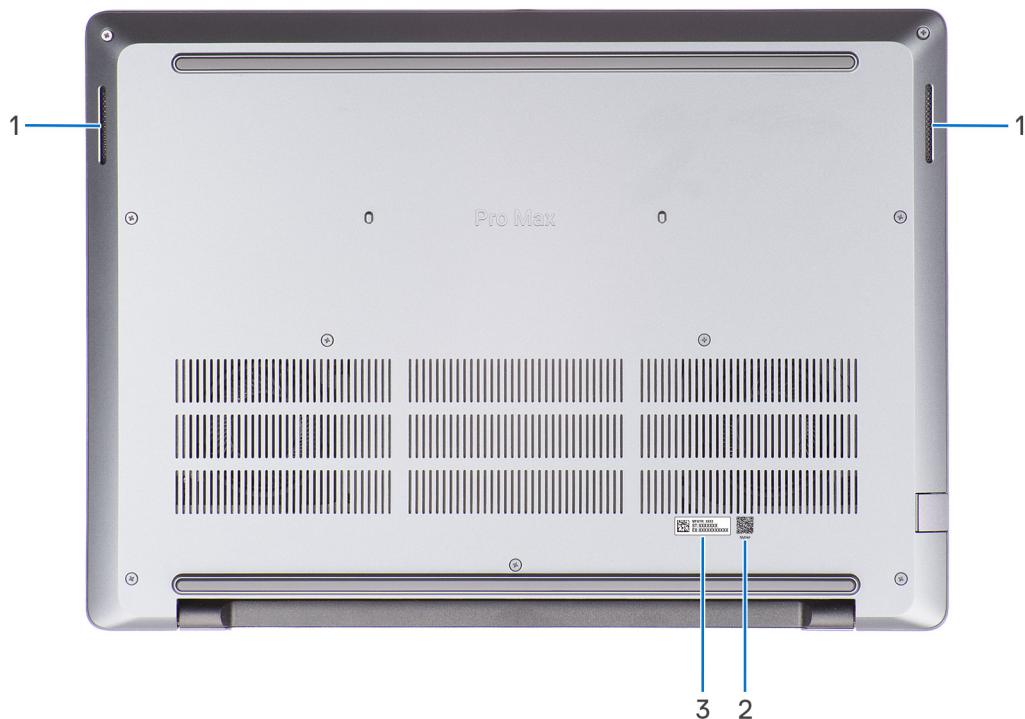

**Figure 6. Bottom view**

### 1. Speakers

Provide audio output.

### 2. MyDell QR code

MyDell is your hub for content that is personalized for your Dell Pro Max 16 MC16255, including videos, articles, manuals, and access to support.


### 3. Service Tag/Express Service Code label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

## Locate the Service Tag or Express Service Code label of your computer

The Service Tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

For more information about how to find the Service Tag of your computer, search in the Knowledge Base Resource at the [Dell Support Site](#).

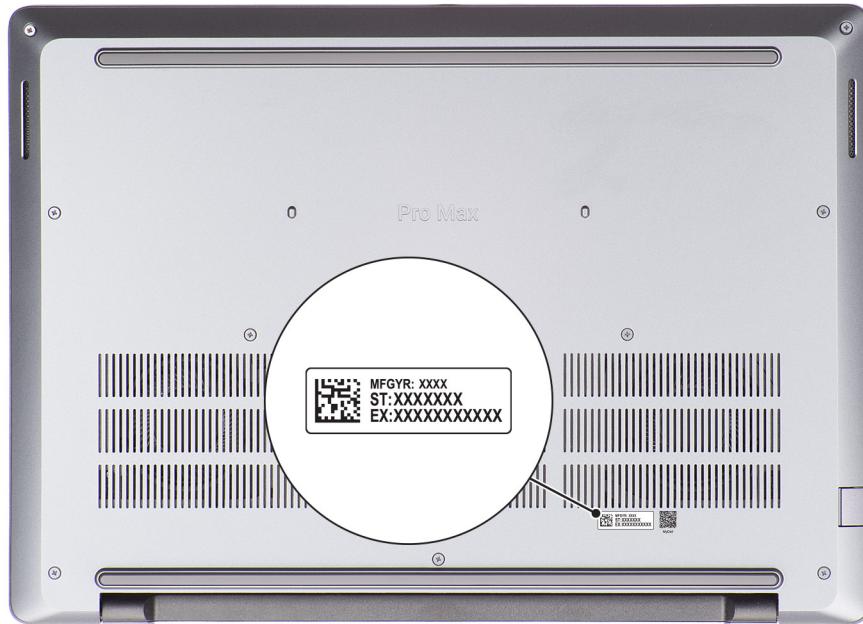

**Figure 7. Service Tag/Express Service Code location**

## Battery-status light

The following table lists the battery-status light of your Dell Pro Max 16 MC16255.

**Table 1. Battery-status light behavior**

Power source	LED behavior	System power state	Battery charge level
AC adapter	Off	S0 or S5	100%
AC adapter	Solid white	S0 or S5	< 100%
Battery	Off	S0 or S5	11-100%
Battery	Solid amber	S0 or S5	< 10%

- S0 (ON): The computer is turned on.
- S3 (Sleep): Screen is off and computer is in sleep mode.
- S4 (Hibernate): The computer consumes the least power in the Hibernate state than in the ON or OFF state. The computer is almost in the OFF state. The context data is written to a storage device, allowing you to resume from where you left after the computer is turned on.
- S5 (OFF): The computer is in a shutdown state.

# Set up your Dell Pro Max 16 MC16255

## About this task

**i** **NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

## Steps

1. Connect the power adapter to one of the Thunderbolt 4 ports and press the power button.



**Figure 8. Connect the power adapter and press the power button**

**i** **NOTE:** The battery may go into power-saving mode during shipment to conserve charge on the battery. Ensure that the power adapter is connected to your computer when it is turned on for the first time.

2. Finish the operating system setup.

### For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search in the Knowledge Base Resource at [Dell Support Site](#).

### For Windows:

Follow the on-screen instructions to complete the setup. When setting up, it is recommended that you:

- Connect to a network for Windows updates.

**i** **NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign-in with an existing Microsoft account or create a new account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

**Table 2. Locate Dell apps**

Resources	Description
	<p><b>Dell Product Registration</b> Register your computer with Dell.</p>
	<p><b>Dell Help &amp; Support</b> Access help and support for your computer.</p>
	<p><b>SupportAssist</b> SupportAssist keeps your computer running at its best by optimizing settings, detecting issue, and removing viruses. It also notifies when updates are available for your computer. SupportAssist proactively checks the health of your computer hardware and software. When an issue is detected, the necessary system state information is sent to Dell to begin troubleshooting. SupportAssist is preinstalled on most of the Dell devices running the Windows operating system. For more information, see Support Assist documentation at <a href="#">Dell Support Site</a>.  <span data-bbox="393 817 425 862"></span> <b>NOTE:</b> In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>
	<p><b>Dell Update</b> Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the product guides and third-party license documents at <a href="#">Dell Support Site</a>.</p>
 <i>Dell Optimizer</i>	<p><b>Dell Optimizer</b> Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more. For Dell Pro Max 16 MC16255 with Dell Optimizer, you can:</p> <ul style="list-style-type: none"> <li>• Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes.</li> <li>• Download and redeem the apps that are purchased with your computer.</li> </ul> <p>For more information about configuring and using these features, search for <i>Dell Optimizer</i> at <a href="#">Dell Support Site</a>.</p>

# Specifications of Dell Pro Max 16 MC16255

## Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell Pro Max 16 MC16255.

**Table 3. Dimensions and weight**

Description	Values
Height:	
Front height	15.08 mm (0.59 in.)
Rear height	19.08 mm (0.75 in.)
Width	358 mm (14.09 in.)
Depth	256 mm (10.08 in.)
Weight <b>NOTE:</b> The weight of your computer depends on the configuration that you ordered.	Minimum: 2.08 kg (4.59 lb)

## Processor

The following table lists the details of the processors that are supported in your Dell Pro Max 16 MC16255.

**Table 4. Processor**

Description	Option one	Option two	Option three
Processor type	AMD Ryzen AI 5 PRO 340	AMD Ryzen AI 7 PRO 350	AMD Ryzen AI 9 HX PRO 370
Configurable Thermal Design Power (cTDP)	15 W–54 W	15 W–54 W	15 W–54 W
Thermal Mode/Thermal Design Power (TDP)			
Optimized	52 W	52 W	52 W
Performance	54 W	54 W	60 W
Processor core count	6	8	12
Processor thread count	12	16	24
Processor speed	Up to 4.8 GHz	Up to 5.0 GHz	Up to 5.1 GHz
Processor cache L2	6 MB	8 MB	12 MB
Processor cache L3	16 MB	16 MB	24 MB
Integrated graphics	AMD Radeon 840M Graphics	AMD Radeon 860M Graphics	AMD Radeon 890M Graphics

**Table 4. Processor (continued)**

<b>Description</b>	<b>Option one</b>	<b>Option two</b>	<b>Option three</b>
Neural Processing Units (NPU) performance	Up to 50 TOPS	Up to 50 TOPS	Up to 50 TOPS

## Chipset

The following table lists the details of the chipset that is supported by your Dell Pro Max 16 MC16255.

**Table 5. Chipset**

<b>Description</b>	<b>Values</b>
Chipset	Integrated with the processor
Processor	<ul style="list-style-type: none"> <li>• AMD Ryzen AI 5 PRO 340</li> <li>• AMD Ryzen AI 7 PRO 350</li> <li>• AMD Ryzen AI 9 HX PRO 370</li> </ul>
DRAM bus width	64-bit
Flash EPROM	Up to 64 MB
PCIe bus	Up to Gen4

## Operating system

Your Dell Pro Max 16 MC16255 supports the following operating systems:

- Windows 11 Home
- Windows 11 Pro
- Ubuntu Linux 22.04 LTS, 64-bit

## Memory

The following table lists the memory specifications of your Dell Pro Max 16 MC16255.

**Table 6. Memory specifications**

<b>Description</b>	<b>Values</b>
Memory slots	Onboard memory
Memory type	LPDDR5x
Memory speed	8000 MT/s
Maximum memory configuration	64 GB
Minimum memory configuration	16 GB
Memory configurations supported	<ul style="list-style-type: none"> <li>• 16 GB: 1 x 16 GB, LPDDR5x, 8000 MT/s, dual-channel (onboard), Non-ECC</li> <li>• 32 GB: 1 x 32 GB, LPDDR5x, 8000 MT/s, dual-channel (onboard), Non-ECC</li> <li>• 64 GB: 1 x 64 GB, LPDDR5x, 8000 MT/s, dual-channel (onboard), Non-ECC</li> </ul>

# External ports and slots

The following table lists the external ports and slots on your Dell Pro Max 16 MC16255.

**Table 7. External ports and slots**

Description	Values
Network port	One RJ45 ethernet port (1 Gbps)
USB ports	<ul style="list-style-type: none"><li>Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort</li><li>One USB 3.2 Gen 1 (5 Gbps) port with PowerShare</li><li>One USB 3.2 Gen 1 (5 Gbps) port</li></ul>
Audio port	One global headset port
Video port(s)	<ul style="list-style-type: none"><li>Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort</li><li>One HDMI 2.1 port</li></ul>
Media-card reader	<ul style="list-style-type: none"><li>One microSD-card slot</li><li>One optional smart-card reader slot</li></ul>
Power-adapter port	Supported via two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort
Security-cable slot	One wedge-shaped lock slot

# Internal slots

The following table lists the internal slots of your Dell Pro Max 16 MC16255.

**Table 8. Internal slots**

Description	Values
M.2	<ul style="list-style-type: none"><li>Two M.2 Key-M (2230/2280) slot for solid state drive</li><li>One M.2 2230 Key-E slot for Wi-Fi and Bluetooth combo card</li></ul> <p> <b>NOTE:</b> To learn more about the features of different types of M.2 cards, search <a href="#">Dell Support Site</a>.</p>

# Ethernet

The following table lists the wired ethernet Local Area Network (LAN) specifications of your Dell Pro Max 16 MC16255.

**Table 9. Ethernet specifications**

Description	Values
Model	Integrated Realtek RTL8111H-CG
Transfer rate	10/100/1000 Mbps

## Wireless module

The following table lists the Wireless Local Area Network (WLAN) module that is supported on your Dell Pro Max 16 MC16255.

**Table 10. Wireless module specifications**

Description	Values
Model number	MediaTek Wi-Fi 7 MT7925
Transfer rate	Up to 2882 Mbps
Frequency bands supported	2.4 GHz/5 GHz/6 GHz
Wireless standards	<ul style="list-style-type: none"><li>Wi-Fi 802.11 a/b/g</li><li>Wi-Fi 4 (WiFi 802.11n)</li><li>Wi-Fi 5 (WiFi 802.11ac)</li><li>Wi-Fi 6E (WiFi 802.11ax)</li><li>Wi-Fi 7 (WiFi 802.11be)</li></ul>
Encryption	<ul style="list-style-type: none"><li>64-bit/128-bit WEP</li><li>AES-CCMP</li><li>TKIP</li></ul>
Bluetooth wireless card	Bluetooth 5.4
<b>(i) NOTE:</b> The functionality of the Bluetooth wireless card may vary based on the operating system.	

## Audio

The following table lists the audio specifications of your Dell Pro Max 16 MC16255.

**Table 11. Audio specifications**

Description	Values
Audio controller	Realtek ALC3329
Stereo conversion	Supported
Internal audio interface	SoundWire interface
External audio interface	One global headset port
Number of speakers	Two
Internal-speaker amplifier	Supported via Realtek ALC1708
External volume controls	Keyboard shortcut controls
Speaker output:	
Average	$2 \text{ W} \times 2 = 4 \text{ W}$
Peak	$2.5 \text{ W} \times 2 = 5 \text{ W}$
Microphone	Dual-array digital microphones

# Storage

This section lists the storage options on your Dell Pro Max 16 MC16255.

Your Dell Pro Max 16 MC16255 supports one M.2 2230/2280 solid state drive. The M.2 2230/2280 solid state drive is the primary storage drive of your computer.

**Table 12. Storage specifications**

Storage type	Interface type	Capacity
M.2 2230 solid state drive	Gen 4 x4 PCIe NVMe	256 GB
M.2 2280 solid state drive, Self-Encrypting	Gen 4 x4 PCIe NVMe	512 GB, 1 TB or 2 TB

# Media-card reader

The following table provides the specification of media cards that are supported by your Dell Pro Max 16 MC16255.

**Table 13. Media-card reader specifications**

Description	Values
Media-card slot type	microSD 4.0 card
Media-cards supported	<ul style="list-style-type: none"><li>microSecure Digital (mSD)</li><li>microSecure Digital High Capacity (mSDHC)</li><li>microSecure Digital Extended Capacity (mSDXC)</li></ul>

**NOTE:** The maximum capacity of the media-card reader varies depending on the standard of the media card that is inserted in your computer.

# Keyboard

The following table lists the keyboard specifications of your Dell Pro Max 16 MC16255.

**Table 14. Keyboard specifications**

Description	Values
Keyboard type	<ul style="list-style-type: none"><li>Standard backlit keyboard</li><li>Standard non-backlit keyboard</li></ul>
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"><li>Arabic, Canada (Bilingual) MUI, Chinese (Traditional), English International, English US, French (Canadian) (MUI), Greek, Hebrew, Korean, Russian, Thai, Ukrainian: 99 keys</li><li>Belgian, Bulgarian, Czech/Slovak (MUI), Danish, English UK, Estonian, French (European), German, Hungarian, Italian, Nordic (MUI), Norwegian, Portuguese (Iberian), Slovenian, Spanish (Castillian), Spanish (Latin America), Swedish/Finnish, Swiss/European (MUI), Turkish, Turkish (F): 100 keys</li><li>Portuguese (Brazil): 101 keys</li><li>Japanese: 103 keys</li></ul>

**Table 14. Keyboard specifications (continued)**

Description	Values
Key pitch	X = 18.05 mm key pitch Y = 18.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p><b>NOTE:</b> You can define the primary behavior of the function keys (F1–F12) by changing <b>Function Key Behavior</b> in BIOS setup program.</p> <p>For more information, see <a href="#">Keyboard shortcuts</a>.</p>

## Keyboard shortcuts of Dell Pro Max 16 MC16255

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol that is shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol that is shown on the upper part of the key is typed out. For example, if you press **2**, 2 is typed out; if you press **Shift + 2**, @ is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multimedia control, as indicated by the icon on the key. Press the function key to enable the task represented by the icon. For example, pressing F1 mutes the audio (see the table below).

However, if the function keys F1-F12 are needed for specific software applications, multimedia functionality can be disabled by pressing **Fn + Esc**. Later, multimedia control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn + F1**.

**NOTE:** You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in the BIOS setup program.

**Table 15. Function key primary behavior**

Function key	Primary behavior
F1	Mute or unmute audio
F2	Decrease volume
F3	Increase volume
F4	Microphone Mute
F5	Keyboard Illumination/Backlight
F6	Decrease brightness
F7	Increase brightness
F8	Switch to external display
F10	Print screen
F11	Home
F12	End

The **Fn** key is also used with selected keys on the keyboard to invoke secondary functions.

**Table 16. Secondary behavior**

Function key	Secondary behavior
Fn + F1	Operating system and application-specific F1 behavior
Fn + F2	Operating system and application-specific F2 behavior
Fn + F3	Operating system and application-specific F3 behavior
Fn + F4	Operating system and application-specific F4 behavior
Fn + F5	Operating system and application-specific F5 behavior
Fn + F6	Operating system and application-specific F6 behavior
Fn + F7	Operating system and application-specific F7 behavior
Fn + F8	Operating system and application-specific F8 behavior
Fn + F9	Operating system and application-specific F9 behavior
Fn + F10	Operating system and application-specific F10 behavior
Fn + F11	Operating system and application-specific F11 behavior
Fn + F12	Operating system and application-specific F12 behavior
Fn + Ctrl	Open the application menu
Fn + Esc	Toggle between multimedia and function key behavior
Fn + PgUp	Scroll up the document or page
Fn + PgDn	Scroll down the document or page
Fn + Home	Move to the beginning of the document
Fn + End	Move to the end of the document
Copilot	<p>Launch Copilot in Windows</p> <p><b>NOTE:</b> If Copilot in Windows is not available on your computer, the Copilot key launches Recall. If both Recall and Copilot in Windows are not available on your computer, the Copilot key launches Windows Search. For more information about Copilot in Windows and Recall, search in the Knowledge Base Resource at the <a href="#">Dell Support Site</a>.</p>

## Camera

The following table lists the camera specifications of your Dell Pro Max 16 MC16255.

**Table 17. Camera specifications**

Description	Option one	Option two
Number of cameras	One	Two
Camera type	FHD RGB camera	FHD RGB and IR camera
Camera location	Front camera	Front camera
Camera sensor type	CMOS sensor technology	CMOS sensor technology
Camera resolution:		
Still image	2.07 megapixel	2.07 megapixel

**Table 17. Camera specifications (continued)**

<b>Description</b>		<b>Option one</b>	<b>Option two</b>
Video		1920 x 1080 (FHD) at 30 fps	1920 x 1080 (FHD) at 30 fps
Infrared camera resolution:			
Still image		N/A	0.23 megapixel
Video		N/A	640 x 360 at 15 fps
Diagonal viewing angle:			
Camera		80.20 degrees	80.20 degrees
Infrared camera		N/A	86.60 degrees

## Touchpad

The following table lists the touchpad specifications of your Dell Pro Max 16 MC16255.

**Table 18. Touchpad specifications**

<b>Description</b>		<b>Values</b>
Touchpad resolution:		
	Horizontal	>= 300 dpi
	Vertical	>= 300 dpi
Touchpad dimensions:		
	Horizontal	125 mm (4.92 in.)
	Vertical	88 mm (3.46 in.)
Touchpad gestures		For more information about the touchpad gestures that are available on: <ul style="list-style-type: none"><li>Windows, search <a href="#">Microsoft Support Site</a>.</li><li>Ubuntu, search <a href="#">Ubuntu Support Site</a>.</li></ul>

## Power adapter

The following table lists the power adapter specifications of your Dell Pro Max 16 MC16255.

**Table 19. Power-adapter specifications**

<b>Description</b>		<b>Option one</b>	<b>Option two</b>
Type		100 W AC adapter, USB Type-C  <b>NOTE:</b> This power adapter is supported by computers shipped only with integrated graphics installed.	130 W AC adapter, USB Type-C
Power-adapter dimensions:			
Height		26.50 mm (1.04 in.)	22 mm (0.87 in.)
Width		60 mm (2.36 in.)	66 mm (2.60 in.)

**Table 19. Power-adapter specifications (continued)**

<b>Description</b>		<b>Option one</b>	<b>Option two</b>
	Depth	122 mm (4.80 in.)	143 mm (5.63 in.)
Input voltage		100 VAC - 240 VAC	100 VAC - 240 VAC
Input frequency		50 Hz - 60 Hz	50 Hz - 60 Hz
Input current (maximum)		1.70 A	1.80 A
Output current (continuous)		<ul style="list-style-type: none"> <li>• 20 V/5 A</li> <li>• 15 V/3 A</li> <li>• 9 V/3 A</li> <li>• 5 V/3 A</li> </ul>	<ul style="list-style-type: none"> <li>• 20 V/6.50 A</li> <li>• 5 V/1 A</li> </ul>
Rated output voltage		<ul style="list-style-type: none"> <li>• 20 VDC</li> <li>• 15 VDC</li> <li>• 9 VDC</li> <li>• 5 VDC</li> </ul>	<ul style="list-style-type: none"> <li>• 20 VDC</li> <li>• 5 VDC</li> </ul>
Temperature range:			
	Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)

 **CAUTION:** Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.

## Power adapter requirements of Dell Pro Max 16 MC16255

 **NOTE:** If you did not purchase the Dell-branded power adapter that is recommended for your computer, ensure that the power adapter you use meets the following requirements.

The following table lists the power adapter requirements for your Dell Pro Max 16 MC16255.

**Table 20. Power adapter requirements**

<b>Description</b>	<b>Value</b>
Power that is required from a power adapter to achieve optimal performance	100 W
Power that charges the computer at a slower speed	Less than 100 W
 <b>NOTE:</b> A warning message may appear informing you about the use of a lower-powered adapter and slower charging speed.	
Minimum power that is required from a power adapter to operate the computer and charge the battery	45 W
 <b>NOTE:</b> A warning message appears informing you about the use of a lower-powered adapter and slower charging speed.	
USB Power Delivery (PD) fast charging	Supported
ExpressCharge mode	Supported  <b>NOTE:</b> Ensure that the computer with a 64 Wh battery is connected to a 100 W power adapter for this feature to be supported.

**Table 20. Power adapter requirements (continued)**

Description	Value
	<p><b>NOTE:</b> Ensure that the computer with a 96 Wh battery is connected to a 130 W power adapter for this feature to be supported.</p>

## Battery

The following table lists the battery specifications of your Dell Pro Max 16 MC16255.

**Table 21. Battery specifications**


Description	Option one	Option two	Option three	Option four
Battery type	4-cell, 64 Wh, Lithium Ion Polymer, ExpressCharge, ExpressCharge Boost, Standard Life	4-cell, 64 Wh, Lithium Ion Polymer, ExpressCharge, ExpressCharge Boost, Long Cycle Life	6-cell, 96 Wh, Lithium Ion Polymer, ExpressCharge, ExpressCharge Boost, Standard Life	6-cell, 96 Wh, Lithium Ion Polymer, ExpressCharge, ExpressCharge Boost, Long Cycle Life
Battery voltage	15.60 VDC	15.60 VDC	11.70 VDC	11.70 VDC
Battery weight (maximum)	0.255 kg (0.56 lb)	0.255 kg (0.56 lb)	0.351 kg (0.77 lb)	0.351 kg (0.77 lb)
Battery dimensions:				
Height	7.71 mm (0.30 in.)			
Width	294.90 mm (11.61 in.)			
Depth	77.50 mm (3.05 in.)			
Temperature range:				
Operating	<ul style="list-style-type: none"> <li>Charge: 0°C to 50°C (32°F to 122°F)</li> <li>Discharge: 0°C to 60°C (32°F to 140°F)</li> </ul>	<ul style="list-style-type: none"> <li>Charge: 0°C to 50°C (32°F to 122°F)</li> <li>Discharge: 0°C to 60°C (32°F to 140°F)</li> </ul>	<ul style="list-style-type: none"> <li>Charge: 0°C to 50°C (32°F to 122°F)</li> <li>Discharge: 0°C to 60°C (32°F to 140°F)</li> </ul>	<ul style="list-style-type: none"> <li>Charge: 0°C to 50°C (32°F to 122°F)</li> <li>Discharge: 0°C to 60°C (32°F to 140°F)</li> </ul>
Storage	–20°C to 65°C (-4°F to 149°F)			
Battery operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)	<ul style="list-style-type: none"> <li>ExpressCharge Boost - From 0% to 35% in almost 20 minutes</li> <li>ExpressCharge - 2 hours</li> <li>Standard charge - 3 hours</li> </ul>	<ul style="list-style-type: none"> <li>ExpressCharge Boost - From 0% to 35% in almost 20 minutes</li> <li>ExpressCharge - 2 hours</li> <li>Standard charge - 3 hours</li> </ul>	<ul style="list-style-type: none"> <li>ExpressCharge Boost - From 0% to 35% in almost 20 minutes</li> <li>ExpressCharge - 2 hours</li> <li>Standard charge - 3 hours</li> </ul>	<ul style="list-style-type: none"> <li>ExpressCharge Boost - From 0% to 35% in almost 20 minutes</li> <li>ExpressCharge - 2 hours</li> <li>Standard charge - 3 hours</li> </ul>
<b>NOTE:</b> You can control the charging time, duration, start and end time, and so on, using the Dell Power Manager				

**Table 21. Battery specifications (continued)**

Description	Option one	Option two	Option three	Option four
application. For more information about Dell Power Manager, search in the Knowledge Base Resource at <a href="#">Dell Support Site</a> .				
Coin-cell battery	Not supported	Not supported	Not supported	Not supported
<b>⚠ CAUTION:</b> Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.				
<b>⚠ CAUTION:</b> Dell Technologies recommends that you charge the battery regularly for optimal power consumption.				

## Power requirements (for computers shipped with 4-cell, 64 Wh battery)

**(i) NOTE:** The information in this section is applicable to the European Union (EU) countries.

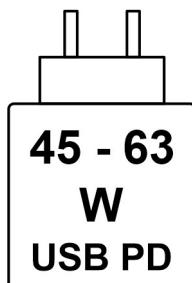
**Figure 9. Pictogram for 64 Wh battery**

The power that is delivered by the charger must be between a minimum of 45 Watts that is required by the radio equipment, and a maximum of 63 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

## Power requirements (for computers shipped with 6-cell, 96 Wh battery)

**(i) NOTE:** The information in this section is applicable to the European Union (EU) countries.

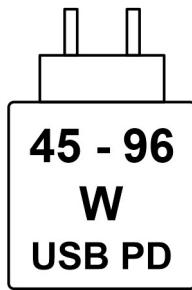

**Figure 10. Pictogram for 96 Wh battery**

The power that is delivered by the charger must be between a minimum of 45 Watts that is required by the radio equipment, and a maximum of 96 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

## Display

The following table lists the display specifications of your Dell Pro Max 16 MC16255.

**Table 22. Display specifications**

<b>Description</b>		<b>Option one</b>	<b>Option two</b>	<b>Option three</b>	<b>Option four</b>	<b>Option five</b>
Display type	16" Full High Definition Plus (FHD+)	16" Quad High Definition Plus (QHD+), ComfortView Plus	16" Full High Definition Plus (FHD+)	16" Full High Definition Plus (FHD+)	16" Quad High Definition Plus (QHD+)	
Touch options	Not supported	Not supported	Not Supported	Supported	Not Supported	
Display-panel technology	Wide-Viewing Angle (WVA)	Wide-Viewing Angle (WVA)	Wide-viewing Angle (WVA)	Wide-viewing Angle (WVA)	Wide-viewing Angle (WVA)	
Display-panel dimensions (active area):						
Height	215.42 mm (8.48 in.)	215.42 mm (8.48 in.)	215.42 mm (8.48 in.)	215.42 mm (8.48 in.)	215.42 mm (8.48 in.)	215.42 mm (8.48 in.)
Width	344.68 mm (13.57 in.)	344.68 mm (13.57 in.)	344.68 mm (13.57 in.)	344.68 mm (13.57 in.)	344.68 mm (13.57 in.)	344.68 mm (13.57 in.)
Diagonal	406.46 mm (16.00 in.)	406.46 mm (16.00 in.)	406.46 mm (16.00 in.)	406.46 mm (16.00 in.)	406.46 mm (16.00 in.)	406.46 mm (16.00 in.)
Display-panel native resolution	1920 x 1200	2560 x 1600	1920 x 1200	1920 x 1200	2560 x 1600	
Luminance (typical)	300 nits	300 nits	400 nits	300 nits	400 nits	
Megapixels	2.3	4.1	2.3	2.3	4.1	
Color gamut	45% NTSC	100% sRGB	45% NTSC	45% NTSC	100% sRGB	
Pixels Per Inch (PPI)	142	189	142	142	189	
Contrast ratio (minimum)	1000:1	1000:1	1000:1	1000:1	1000:1	

**Table 22. Display specifications (continued)**

<b>Description</b>	<b>Option one</b>	<b>Option two</b>	<b>Option three</b>	<b>Option four</b>	<b>Option five</b>
Response time (maximum)	35 ms				
Refresh rate	60 Hz	120 Hz	60 Hz	60 Hz	120 Hz
Horizontal view angle	<ul style="list-style-type: none"> <li>• Minimum: 80 +/- degrees</li> <li>• Typical: 85 +/- degrees</li> </ul>	<ul style="list-style-type: none"> <li>• Minimum: 80 +/- degrees</li> <li>• Typical: 85 +/- degrees</li> </ul>	<ul style="list-style-type: none"> <li>• Minimum: 80 +/- degrees</li> <li>• Typical: 89 +/- degrees</li> </ul>	<ul style="list-style-type: none"> <li>• Minimum: 80 +/- degrees</li> <li>• Typical: 85 +/- degrees</li> </ul>	<ul style="list-style-type: none"> <li>• Minimum: 80 +/- degrees</li> <li>• Typical: 89 +/- degrees</li> </ul>
Vertical view angle	<ul style="list-style-type: none"> <li>• Minimum: 80 +/- degrees</li> <li>• Typical: 85 +/- degrees</li> </ul>	<ul style="list-style-type: none"> <li>• Minimum: 80 +/- degrees</li> <li>• Typical: 85 +/- degrees</li> </ul>	<ul style="list-style-type: none"> <li>• Minimum: 80 +/- degrees</li> <li>• Typical: 89 +/- degrees</li> </ul>	<ul style="list-style-type: none"> <li>• Minimum: 80 +/- degrees</li> <li>• Typical: 85 +/- degrees</li> </ul>	<ul style="list-style-type: none"> <li>• Minimum: 80 +/- degrees</li> <li>• Typical: 89 +/- degrees</li> </ul>
Pixel pitch	0.18 x 0.18	0.13 x 0.13	0.18 x 0.18	0.18 x 0.18	0.13 x 0.13
Power consumption (maximum)	4.45 W	4.80 W	5.65 W	5.60 W	5.97 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	Anti-glare	Anti-glare	Anti-glare

## Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint reader of your Dell Pro Max 16 MC16255.

 **NOTE:** The fingerprint reader is on the power button.

**Table 23. Fingerprint reader specifications**

<b>Description</b>	<b>Values</b>
Sensor technology	Capacitive sensing
Sensor resolution	500 dpi
Sensor pixel size	108 x 88 pixels

## Sensors

The following table lists the sensors of your Dell Pro Max 16 MC16255.

**Table 24. Sensor**

<b>Sensor support</b>
Accelerometer (for positional sensing)
Hall Effect Sensor

## GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Dell Pro Max 16 MC16255.

**Table 25. GPU—Integrated**

Controller	Memory size	Processor
AMD Radeon 840M Graphics	Shared system memory	AMD Ryzen AI 5 PRO 340 processors
AMD Radeon 860M Graphics	Shared system memory	AMD Ryzen AI 7 PRO 360 processors
AMD Radeon 890M Graphics	Shared system memory	AMD Ryzen AI 9 HX PRO 370 processors

## GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Dell Pro Max 16 MC16255.

**Table 26. GPU—Discrete**

Controller	Memory size	Memory type
NVIDIA RTX PRO 500-Blackwell	6 GB	GDDR7
NVIDIA RTX PRO 1000-Blackwell	8 GB	GDDR7

## Multiple display support matrix

The following table lists the multiple display support matrix for your Dell Pro Max 16 MC16255.

**Table 27. Multiple display support matrix**

Graphics Card	Direct Graphics Controller Direct Output Mode	Supported external displays with computer internal display on	Supported external displays with computer internal display off
AMD Radeon 840M Graphics	Not supported	3	4
AMD Radeon 860M Graphics	Not supported	3	4
AMD Radeon 890M Graphics	Not supported	3	4
NVIDIA RTX PRO 500- Blackwell	Not supported	3	4
NVIDIA RTX PRO 1000- Blackwell	Not supported	3	4

# Hardware security

The following table lists the hardware security of your Dell Pro Max 16 MC16255.

**Table 28. Hardware security**

Hardware security
One wedge-shaped lock slot
Windows Hello - Fingerprint Reader (optional)
Trusted Platform Module (TPM) 2.0 discrete
FIPS 140-2 certification for TPM
TCG Certification for TPM (Trusted Computing Group)
Fingerprint reader in power button available with and without ControlVault 3 Plus
ControlVault 3 Plus Advanced Authentication with FIPS 140-3 Level 3 Certification (optional)
Contacted Smart Card and ControlVault 3 Plus
Contactless Smart Card, NFC, and ControlVault 3 Plus
SED SSD NVMe, SSD per SDL

# Smart-card reader

## Contactless smart-card reader

This section lists the contactless smart-card reader specifications of your Dell Pro Max 16 MC16255.

**Table 29. Contactless smart-card reader specifications**

Title	Description	Dell ControlVault 3 Plus Contactless smart-card reader with NFC
Felica Card Support	Reader and software capable of supporting Felica contactless cards	Yes
Prox (Proximity) (125kHz) Card support	Reader and software capable of supporting Prox /Proximity/125 kHz contactless cards	No
ISO 14443 Type A Card Support	Reader and software capable of supporting ISO 14443 Type A contactless cards	Yes
ISO 14443 Type B Card Support	Reader and software capable of supporting ISO 14443 Type B contactless cards	Yes
ISO/IEC 21481	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens	Yes
ISO/IEC 18092	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens	Yes
ISO 15693 Card Support	Reader and software capable of supporting ISO15693 contactless cards	Yes
NFC Tag Support	Supports reading and processing of NFC compliant tag information	Yes

**Table 29. Contactless smart-card reader specifications (continued)**

<b>Title</b>	<b>Description</b>	<b>Dell ControlVault 3 Plus Contactless smart-card reader with NFC</b>
NFC Reader Mode	Support for NFC Forum Defined Reader mode	Yes
NFC Writer Mode	Support for NFC Forum Defined Writer mode	Yes
NFC Peer-to-Peer Mode	Support for NFC Forum Defined Peer to Peer mode	Yes
NFC Proximity OS Interface	Enumerates NFP (Near Field Proximity) device for operating system to utilize	Yes
PC/SC operating system interface	Personal Computer/Smart Card specification for integration of hardware readers into personal computer environments	Yes
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for operating system level drivers	Yes
Dell ControlVault support	The device connects to Dell ControlVault for usage and processing	Yes

 **NOTE:** 125 KHz proximity cards are not supported.

**Table 30. Supported cards**

<b>Manufacturer</b>	<b>Card</b>
HID	jCOP readertest3 A card (14443a) 1430 1L DESFire D8H DESFIRE 4K Standard - 1450NGGNN iClass 16K/16 - 2002PGGMN iClass SR 16K/16 - 2002HPGGMN iCLASS 2K tag iCLASS GP - 2003 PGGMN iClass Clamshell - 2080PMSMV iClass Prox 16K/16 - 2022BGGMNN Mifare M1P 1430 NGGNN iclass Prox 2020BGGMNM DesFire D8P 1456CSGMN iCLASS MIFARE Px GM49Y 2623BNPGGBNAB iCLASS MIFARE Px 8M1L iClass SEOS JW 5006PGGMN Crescendo iCLASS Px G8H iCLASS Seos IY SEOS JMC4 J1Y 5806VNG1NNN4 SEOS Key FOB 5266PNNA

**Table 30. Supported cards (continued)**

Manufacturer	Card
	SEOS Clamshell 5656PMSAV
	SEOS + Prox 5106RGGMNN
	SEOS + DESFire 5906PNG1ANN7
	SEOS iClass 5006PGGMN7
	Seos Essential + Prox 551PPGGANN
	iCLASS 2K 2000PGGMN
	iCLASS 2K 3000PGGMN
	MIFARE DESFire 3700CPGGAN
	iCLASS DP
	DESFire 1Y
NXP/Mifare	Mifare DESFire 8K White PVC card
	Mifare Classic 1K White PVC card
	NXP Mifare Classic S50 ISO card
	Mifare DESFire 2K
	Mifare Plus S 2K/4K
	Mifare Plus X 4K
G&D	idOnDemand - SCE3.2 144K
	SCE6.0 FIPS 80K Dual + 1K Mifare
	SCE6.0 nonFIPS 80K Dual + 1K Mifare
	SCE6.0 FIPS 144K Dual + 1K Mifare
	SCE6.0 nonFIPS 144K Dual + 1K Mifare
	SCE7.0 FIPS 144K
Oberthur	idOnDemand - OCS5.2 80K
	ID-One Cosmo 64 RSA D V5.4 T = 0 card
	ID-One Cosmo 128K V5.5 card
Gemalto	TOP DL GX4 144K card
Sony	Felica RC-S962
	Felica RC-S965
	Felica RC-S966
PIVKey	C910 PKI
NIST	PIV1
IDENTIV	PIV programmed cards
	uTrust
Transport cards	Oyster (London) MIFARE DESFire
	T-Money (Korea)
	Octopus Card (Hong Kong)
	SUICA (Japan)

**Table 31. Qualified NFC tags**

NFC tag	Supported
Tap and do - NFC Forum Type 1 Tag - Topaz 512 (BCM92023)	Yes
Tap and do - NFC Forum Type 1 Tag - Topaz 512 (BCM20203T512)	Yes
Tap and do - NFC Forum Type 1 Tag - Topaz (BCM20203T96)	Yes
Tap and do - NFC Forum Type 2 Tag - Mifare UltraLight	Yes
Tap and do - NFC Forum Type 2 Tag - Mifare UltraLight C	Yes
Tap and do - NFC Forum Type 2 Tag - NTAG203	Yes
Tap and do - NFC Forum Type 3 Tag - FeliCa Lite RC-S965	Yes
Tap and do - NFC Forum Type 3 Tag - FeliCa RC-S962	Yes
Tap and do - NFC Forum Type 4 Tag - Mifare DESFire EV1Card 2K	Yes
Tap and do - NFC Forum Type 4 Tag - Mifare DESFire EV1Card 4K	Yes
Tap and do - NFC Forum Type 4 Tag - Mifare DESFire EV1Card 8K	Yes
Tap and do - ISO 15693 - Tag-it Plus	Yes
HID I-code ISO card	Yes

## Contacted smart-card reader

The following table lists the contacted smart-card reader specifications of your Dell Pro Max 16 MC16255.

**Table 32. Contacted smart-card reader specifications**

Title	Description	Dell ControlVault 3 smart-card reader
ISO 7816 -3 Class A Card Support	Reader capable of reading 5V powered smart mcard	Yes
ISO 7816 -3 Class B Card Support	Reader capable of reading 3V powered smart card	Yes
ISO 7816 -3 Class C Card support	Reader capable of reading 1.8V powered smart card	Yes
ISO 7816-1 Compliant	Specification for the reader	Yes
ISO 7816 -2 Compliant	Specification for smart card device physical characteristics (size, location of connection points, etc.)	Yes
T=0 support	Cards support character level transmission	Yes
T=1 support	Cards support block level transmission	Yes
EMVCo Compliant	Compliant with EMVCo (for electronic payment standards) smart card standards as posted to <a href="http://www.emvco.com">www.emvco.com</a>	Yes
EMVCo Certified	Formally certified based on EMVCO smart card standards	Yes

**Table 32. Contacted smart-card reader specifications (continued)**

<b>Title</b>	<b>Description</b>	<b>Dell ControlVault 3 smart-card reader</b>
PC/SC OS interface	Personal Computer/Smart Card specification for integration of hardware readers into personal computer environments	Yes
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for OS level drivers.	Yes
Windows Certified	Device certified by WHCK	Yes
FIPS 201 (PIV/HSPD-12) Compliant via GSA	Device compliant with FIPS 201/PIV/HSPD-12 requirements	Yes
FIDO2 compliance	Dell ControlVault 3 Smart-card reader is compliant with the FIDO SPEC	Yes

## Operating and storage environment

This table lists the operating and storage specifications of your Dell Pro Max 16 MC16255.

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985

**Table 33. Computer environment**

<b>Description</b>	<b>Operating</b>	<b>Storage</b>
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10,000 ft)	-15.2 m to 10,668 m (-49.87 ft to 35,000 ft)

**⚠ CAUTION:** Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.

\* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

## ComfortView Plus

**⚠ WARNING:** Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Take an extended break for 20 minutes every two hours.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.

## Dell Optimizer

Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more.

For Dell Pro Max 16 MC16255 with Dell Optimizer, you can:

- Extend the battery life of your computer with Intelligent Battery Extender and Dynamic Charge.
- Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes.
- Access and secure your computer depending on your physical presence.
- Download and redeem the apps that are purchased with your computer.

For more information about configuring and using these features, search for *Dell Optimizer* at the [Dell Support Site](#).

# Working inside your computer

## Safety instructions

Use the following safety guidelines to protect your computer from potential damage and to ensure your personal safety. Unless otherwise noted, each procedure in this document assumes that you have read the safety information that shipped with your computer.

- ⚠ WARNING: Before working inside your computer, read the safety information that is shipped with your computer. For more safety best practices, see [Dell Regulatory Compliance Home Page](#).**
- ⚠ WARNING: Disconnect your computer from all power sources before opening the computer cover or panels. After you finish working inside the computer, replace all covers, panels, and screws before connecting your computer to an electrical outlet.**
- ⚠ WARNING: For laptops, discharge the battery completely before removing it. Disconnect the AC power adapter from the computer and operate the computer solely on battery power—the battery is fully discharged when the computer no longer turns on when the power button is pressed.**
- ⚠ CAUTION: To avoid damaging the computer, ensure that the work surface is flat, dry, and clean.**
- ⚠ CAUTION: You should only perform troubleshooting and repairs as authorized or directed by the Dell technical support team. Damage due to servicing that is not authorized by Dell is not covered by your warranty.**
- ⚠ CAUTION: Before touching anything inside your computer, ground yourself by touching an unpainted metal surface, such as the metal at the back of the computer. While you work, periodically touch an unpainted metal surface to dissipate static electricity which could harm internal components.**
- ⚠ CAUTION: To avoid damaging the components and cards, handle them by their edges, and avoid touching the pins and the contacts.**
- ⚠ CAUTION: When you disconnect a cable, pull it by its connector or its pull tab, not the cable itself. Some cables have connectors with locking tabs or thumbscrews that you must disengage before disconnecting the cable. When disconnecting cables, keep them evenly aligned to avoid bending the connector pins. When connecting cables, ensure that the connector on the cable is correctly oriented and aligned with the port.**
- ⚠ CAUTION: Press and eject any installed card from the media-card reader.**
- ⚠ CAUTION: Exercise caution when handling rechargeable Li-ion batteries in laptops. Swollen batteries should not be used and should be replaced and disposed properly.**

## Before working inside your computer

### About this task

- i NOTE: The images in this document may differ from your computer depending on the configuration you ordered.**

### Steps

1. Save and close all open files and exit all open applications.
2. Shut down your computer. For Windows operating system, click **Start > ⚡ Power > Shut down**.

- i NOTE: If you are using a different operating system, see the documentation of your operating system for instructions.**

3. Turn off all the attached peripherals.
4. Disconnect your computer from the electrical outlet.
5. Disconnect all attached network devices and peripherals, such as keyboard, mouse, and monitor from your computer.
6. Remove any media card and optical drive from your computer, if applicable.
7. To clean the air vents, use a soft brush and move vertically.

 **NOTE:** Do not remove the base cover or use any blower to clean the vents.

8. Enter the Service Mode.

#### Service Mode

Service Mode is used to cut off power without disconnecting the battery cable from the system board before conducting repairs in the computer.

 **CAUTION:** If you are unable to turn on the computer to put it into Service Mode, disconnect the battery cable. To disconnect the battery cable, follow the steps in [Removing the battery](#).

 **NOTE:** Ensure that your computer is shut down and the power adapter is disconnected.

- a. Press and hold the B key and the power button for 3 seconds, or until the Dell logo appears on the screen.
- b. If the **Owner Tag** is set, it is displayed on the screen. Press any key to continue.

 **NOTE:** If the **Owner Tag** information is not already set, the computer automatically skips this step and proceeds to enter Service Mode.

- c. If the power adapter is still connected, a message appears on the screen prompting you to disconnect it. Disconnect the power adapter, then press any key to continue.
- d. When the **System Ready For Service** message appears on the screen, press any key to proceed. The computer emits three short beeps and shuts down immediately.

The computer shuts down and enters the Service Mode.

## Safety precautions

This section details the primary steps to be followed before disassembling any device or component.

Observe the following safety precautions before any installation or break-fix procedures involving disassembly or reassembly:

- Turn off the computer and all attached peripherals.
- Disconnect the computer from AC power.
- Disconnect all network cables and peripherals from the computer.
- Use an ESD field service kit when working inside your computer to avoid electrostatic discharge (ESD) damage.
- Place the removed component on an anti-static mat after removing it from the computer.
- Press and hold the power button for 15 seconds to discharge the residual power in the system board.

## Bonding

Bonding is a method for connecting two or more grounding conductors to the same electrical potential. This is done by using a field service electrostatic discharge (ESD) kit. When connecting a bonding wire, ensure that it is connected to bare metal and never to a painted or nonmetal surface. Ensure that the wrist strap is secure and in full contact with your skin. Remove all jewelry, watches, bracelets, or rings before grounding yourself and the equipment.

## Electrostatic discharge—ESD protection

ESD is a major concern when you handle electronic components, especially sensitive components such as expansion cards, processors, memory modules, and system boards. A slight charge can damage circuits in ways that may not be obvious, such as intermittent problems or a shortened product life span. As the industry pushes for lower power requirements and increased density, ESD protection is an increasing concern.

Two recognized types of ESD damage are catastrophic and intermittent failures.

- **Catastrophic** – Catastrophic failures represent approximately 20 percent of ESD-related failures. The damage causes an immediate and complete loss of device functionality. An example of catastrophic failure is a memory module that has

received a static shock and immediately generates a "No POST/No Video" symptom with a beep code that is emitted for missing or nonfunctional memory.

- **Intermittent** – Intermittent failures represent approximately 80 percent of ESD-related failures. The high rate of intermittent failures means that most of the time when damage occurs, it is not immediately recognizable. The memory module receives a static shock, but the tracing is merely weakened and does not immediately produce outward symptoms that are related to the damage. The weakened trace may take weeks or months to melt, and in the meantime may cause degradation of memory integrity, intermittent memory errors, and so on.

Intermittent failures that are also called latent or "walking wounded" are difficult to detect and troubleshoot.

Perform the following steps to prevent ESD damage:

- Use a wired ESD wrist strap that is properly grounded. Wireless anti-static straps do not provide adequate protection. Touching the chassis before handling parts does not ensure adequate ESD protection on parts with increased sensitivity to ESD damage.
- Handle all static-sensitive components in a static-safe area. If possible, use anti-static floor pads and workbench pads.
- When unpacking a static-sensitive component from its shipping carton, do not remove the component from the anti-static packing material until you are ready to install the component. Before unwrapping the anti-static packaging, use the anti-static wrist strap to discharge the static electricity from your body.

 **NOTE:** You can protect against ESD and discharge static electricity from your body by touching a metal-grounded object before you interact with anything electronic, for example, an unpainted metal surface on your computer's I/O panel. When connecting a peripheral (including handheld digital assistants) to your computer, you should always ground both yourself and the peripheral before connecting it to the computer. In addition, as you work inside the computer, periodically touch a metal-grounded object to remove any static charge that your body may have accumulated.

For more information about the wrist strap and ESD wrist strap tester, see [Components of an ESD Field Service Kit](#).

- Before transporting a static-sensitive component, place it in an anti-static container or packaging.

## ESD Field Service kit

The unmonitored field service kit is the most commonly used service kit. Each Field Service kit includes three main components: anti-static mat, wrist strap, and bonding wire.

 **CAUTION:** It is critical to keep ESD-sensitive devices away from internal parts that are insulated and often highly charged, such as plastic heat sink casings.

## Working environment

Before the ESD Field Service kit is deployed, conduct an evaluation of the site to ensure proper setup and readiness. For example, deploying the kit for a server environment is different than for a desktop or laptop environment. Servers are typically installed in a rack within a data center; desktops or laptops are typically placed on office desks or cubicles. Always look for a large open flat work area that is free of clutter and large enough to deploy the ESD kit with additional space to accommodate the type of computer that is being repaired. The workspace should also be free of insulators that can cause an ESD event. On the work area, insulators such as styrofoam and other plastics should always be moved at least 12 inches or 30 centimeters away from sensitive parts before physically handling any hardware components.

## ESD packaging

All ESD-sensitive devices must be shipped and received in static-safe packaging. Metal, static-shielded bags are preferred. However, you should always return the damaged component using the same ESD bag and packaging that the new part arrived in. The ESD bag should be folded over and taped shut and all the same foam packing material should be used in the original box that the new part arrived in. ESD-sensitive devices should be removed from packaging only at an ESD-protected work surface, and parts should never be placed on top of the ESD bag because only the inside of the bag is shielded. Always place parts in your hand, on the anti-static mat, in the computer, or inside an ESD bag.

## Components of an ESD Field Service kit

The components of an ESD Field Service kit are:

- **Anti-Static Mat** – The anti-static mat is dissipative and parts can be placed on it during service procedures. When using an anti-static mat, your wrist strap should be snug and the bonding wire should be connected to the anti-static mat and to any bare metal on the computer being worked on. Once deployed properly, service parts can be removed from the ESD bag and placed directly on the anti-static mat. ESD-sensitive items are safe in your hand, on the anti-static mat, in the computer, or inside an ESD bag.
- **Wrist Strap and Bonding Wire** – If an anti-static mat is not being used, the wrist strap and bonding wire should be connected directly between your wrist and an exposed metal part of the hardware. If you are using an anti-static mat, connect the wrist strap and bonding wire to the anti-static mat to ensure protection for any hardware placed on the mat. The physical connection of the wrist strap and bonding wire between your skin, the anti-static mat, and the hardware is known as bonding. Use only Field Service kits with a wrist strap, anti-static mat, and bonding wire. Never use wireless wrist straps. Always be cautious that the internal wires of a wrist strap are prone to damage from normal wear and tear, and must be checked regularly with a wrist strap tester in order to avoid accidental ESD hardware damage. It is recommended to test the wrist strap and bonding wire at least once per week.
- **ESD Wrist Strap Tester** – The wires inside an ESD strap are prone to damage over time. When using an unmonitored ESD kit, it is recommended to test the wrist strap regularly—ideally before each service session, and at a minimum, once per week. The most reliable method for testing is with a wrist strap tester. To perform the test, connect the bonding wire of the wrist strap to the tester while wearing the strap. Press the test button to initiate the check. A green LED indicates a successful test, while a red LED and audible alarm signal a failure.

 **NOTE:** It is recommended to always use the traditional wired ESD grounding wrist strap and protective anti-static mat when servicing Dell products. In addition, it is critical to keep sensitive parts separate from all insulator parts while servicing the computer.

## Transporting sensitive components

When transporting ESD sensitive components such as replacement parts or parts to be returned to Dell, it is critical to place these parts in anti-static bags for safe transport.

## After working inside your computer

### About this task

 **CAUTION:** Leaving stray or loose screws inside your computer may severely damage your computer.

### Steps

1. Replace all screws and ensure that no stray screws remain inside your computer.
2. Connect any external devices, peripherals, or cables you removed before working on your computer.
3. Replace any media cards, disks, or any other parts that you removed before working on your computer.
4. Connect your computer to their electrical outlets.

 **NOTE:** To exit service mode, ensure to connect the AC adapter to the power-adapter port on your computer.

5. Press the power button to turn on the computer.

## BitLocker

When updating the BIOS on a computer with BitLocker enabled, consider the following precautions.

 **CAUTION:** If BitLocker is not suspended before updating the BIOS, the BitLocker key will not be recognized the next time that you reboot the computer. You are prompted to enter the recovery key to progress, and the computer displays a prompt for the recovery key on each reboot. If the recovery key is not known, this can result in data loss or an operating system reinstall. For more information, see Knowledge Article: [updating the BIOS on Dell computers with BitLocker enabled](#).

The installation of the following components triggers BitLocker:

- Hard disk drive or solid state drive
- System board

# Recommended tools

The procedures in this document may require the following tools:

- Phillips screwdriver #0
- Flat-headed screwdriver (maximum width: 4 mm)
- Plastic scribe

## Screw list

**(i) NOTE:** When removing screws from a component, it is recommended to note the screw type and the quantity of screws, and then place them in a screw storage box. This is to ensure that the correct number of screws and correct screw type is restored when the component is replaced.

**(i) NOTE:** Some computers have magnetic surfaces. Ensure that the screws are not left attached to such surfaces when replacing a component.

**(i) NOTE:** Screw color may vary depending on the configuration ordered.

**Table 34. Screw list**


Component	Screw type	Quantity	Screw image
Base cover	Captive screw <b>(i) NOTE:</b> Screws are part of the base cover.	9	
Battery	M2x4	8	
Solid state drive	M2x4	1	
Wireless-card bracket	M2x3	1	
Speakers	M1.6x3	4	
Right/Processor fan	M2x4	2	
Left/Video fan	M2x4	2	
Heat sink	Captive screw <b>(i) NOTE:</b> Screws are part of the heat sink.	4	
GPU filler	M2x3	2	
Battery frame	M2x3	10	
USH board	M2x2	2	
Smart-card reader	M2x2	3	

**Table 34. Screw list (continued)**

Component	Screw type	Quantity	Screw image
Display-cable bracket	M2x3	3	
Display assembly	M2.5x5	6	
Display panel	M2x3	4	
Display hinges	M2.5x3.5	6	
Fingerprint-reader bracket	M2x3	1	
System board	M2x4	2	
	M2x3	3 or 4	
USB Type-C module	M2x5	3	
Power button	M2x2	2	
Keyboard	M2x2.2	20	
Keyboard bracket	M2x2.2	9	

## Major components of Dell Pro Max 16 MC16255

The following image shows the major components of Dell Pro Max 16 MC16255.

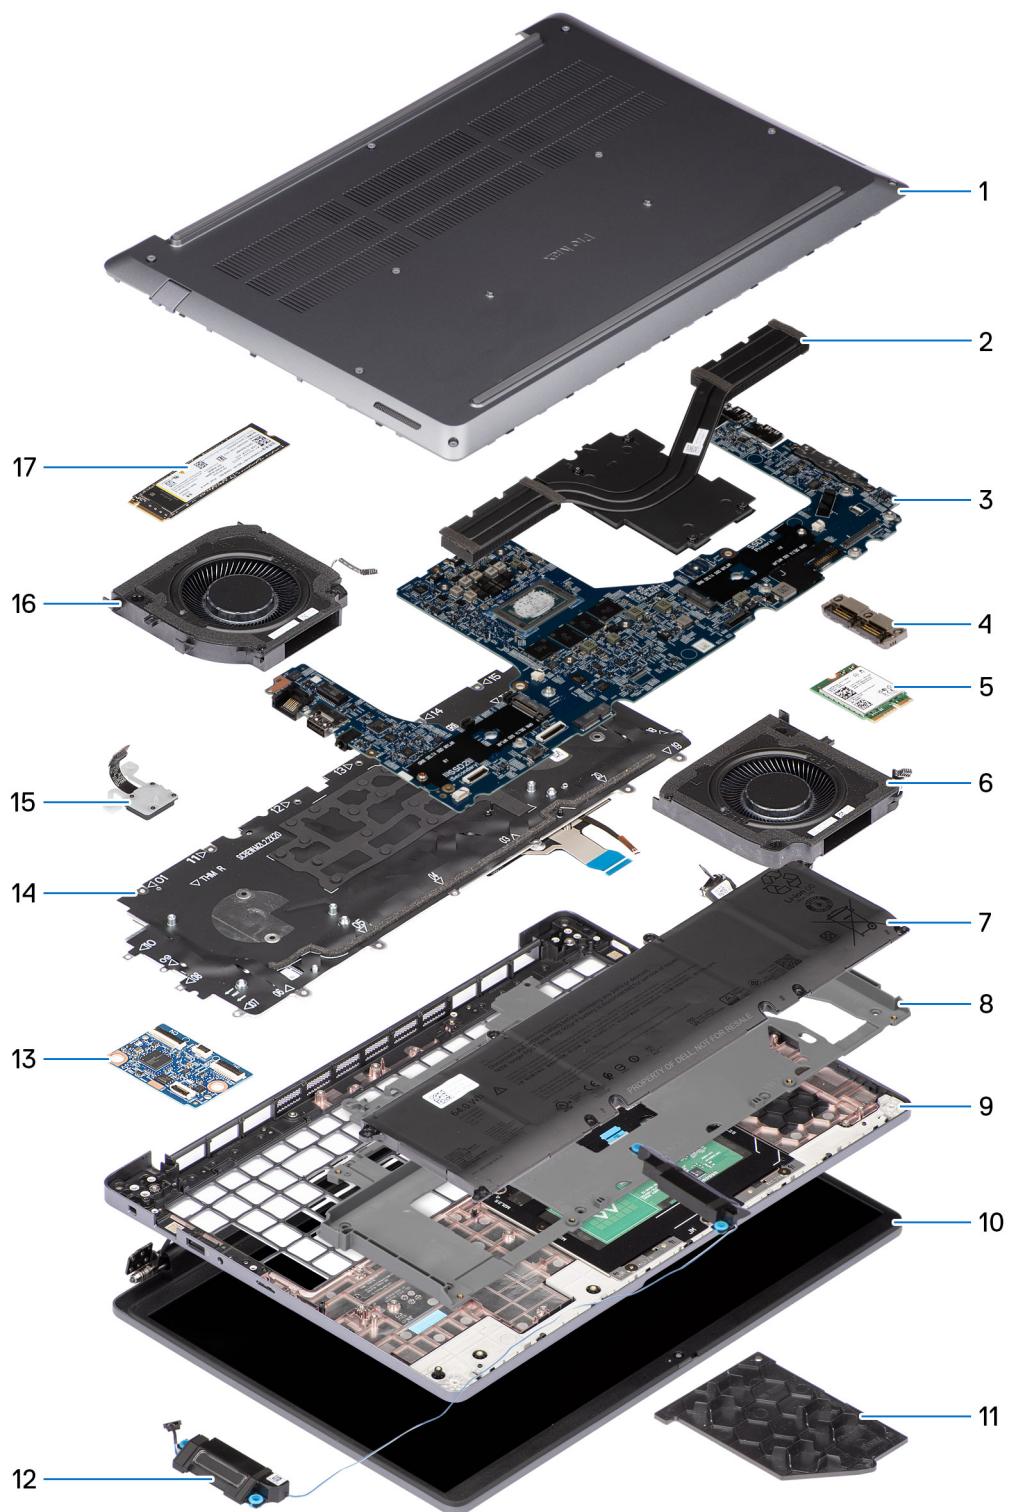

**Figure 11. Major components of your Dell Pro Max 16 MC16255**

1. Base cover
2. Heat sink
3. System board
4. USB Type-C module
5. Wireless card
6. Left/Video fan
7. Battery

8. Battery frame
9. Palm-rest assembly
10. Display assembly
11. GPU filler
12. Speakers
13. USH board
14. Keyboard assembly
15. Power button with optional fingerprint reader
16. Right/Processor fan
17. Solid state drive

 **NOTE:** Dell Technologies provides a list of components and their part numbers for the original system configuration purchased. These parts are available according to warranty coverages purchased by the customer. Contact your Dell sales representative for purchase options.

## Customer Replaceable Units (CRUs) and Field Replaceable Units (FRUs) list

The replaceable components in your Dell Pro Max 16 MC16255 are either Customer Replaceable Units (CRUs) or Field Replaceable Units (FRUs).

 **CAUTION:** To avoid any potential damage to the component or loss of data, ensure that an authorized service technician replaces the Field Replaceable Units (FRUs). Customers can replace only the Customer Replaceable Units (CRUs) following the safety precautions and replacement procedures.

**Table 35. CRU and FRU list**

Customer Replaceable Unit (CRU)	Field Replaceable Unit (FRU)
Base cover	Heat sink
Battery	GPU filler
Battery cable	Battery frame
Primary solid state drive	USH board
Secondary solid state drive	Smart-card reader
Wireless card	Display assembly
Speakers	Display bezel
Right/Processor fan	Display panel
Left/Video fan	Display hinges
	Display cable
	Camera
	Display back-cover and antenna assembly
	System board
	USB Type-C module
	Power button
	Keyboard
	Palm-rest assembly

# Removing and installing Customer Replaceable Units (CRUs)

The replaceable components in this chapter are Customer Replaceable Units (CRUs).

 **CAUTION:** Customers can replace only the Customer Replaceable Units (CRUs) following the safety precautions and replacement procedures.

 **NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

## Base cover

### Removing the base cover

#### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).


 **CAUTION:** Ensure that your computer is in Service Mode. If the computer does not turn on, does not enter Service Mode, or does not support Service Mode, proceed to disconnect the battery cable.

#### About this task


The following images indicate the location of the base cover and provide a visual representation of the removal procedure.



9x

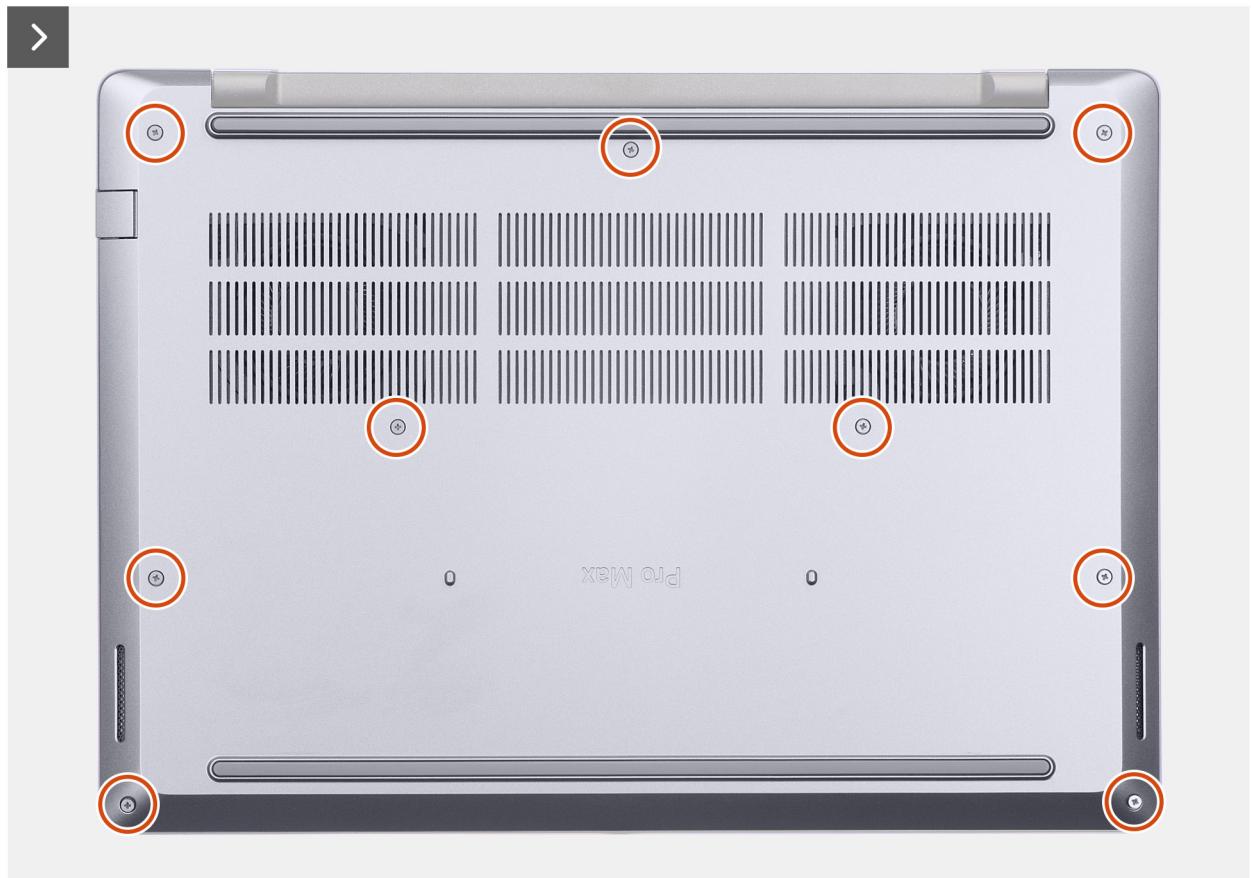

**Figure 12. Removing the base cover**

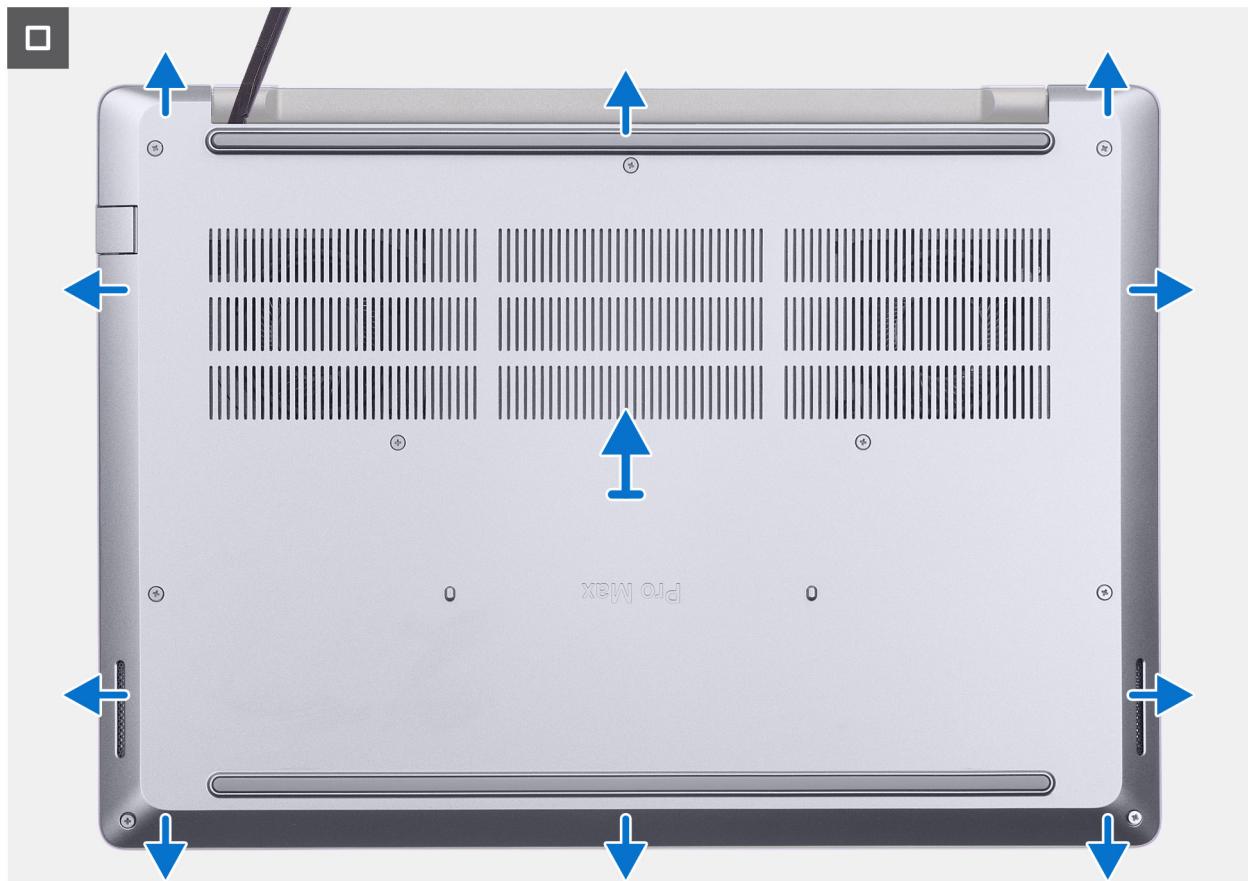

**Figure 13. Removing the base cover**

#### Steps

1. Loosen the nine captive screws that secure the base cover to the palm-rest assembly.
2. Using a plastic scribe, pry open the base cover starting from the recesses, which are located at the top edge of the base cover, near the hinges.

**CAUTION:** Do not slide the scribe along the edges of the base cover as it may damage the latches inside the base cover. Instead, insert the scribe at regular intervals and pry open the base cover.
3. Pry open the top of the base cover followed by the left, right, and bottom to release the base cover.
4. Lift the base cover off the palm-rest assembly.

**NOTE:** Ensure that your computer is in Service Mode. If your computer is unable to enter Service Mode, then disconnect the battery cable from the system board.

5. Disconnect the battery cable from the battery cable connector (BATT1) on the system board.



**Figure 14. Removing the battery cable**

6. Press and hold the power button for five seconds to ground the computer and drain the flea power.

## Installing the base cover

### Prerequisites


If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task


The following images indicate the location of the base cover and provide a visual representation of the installation procedure.



9x

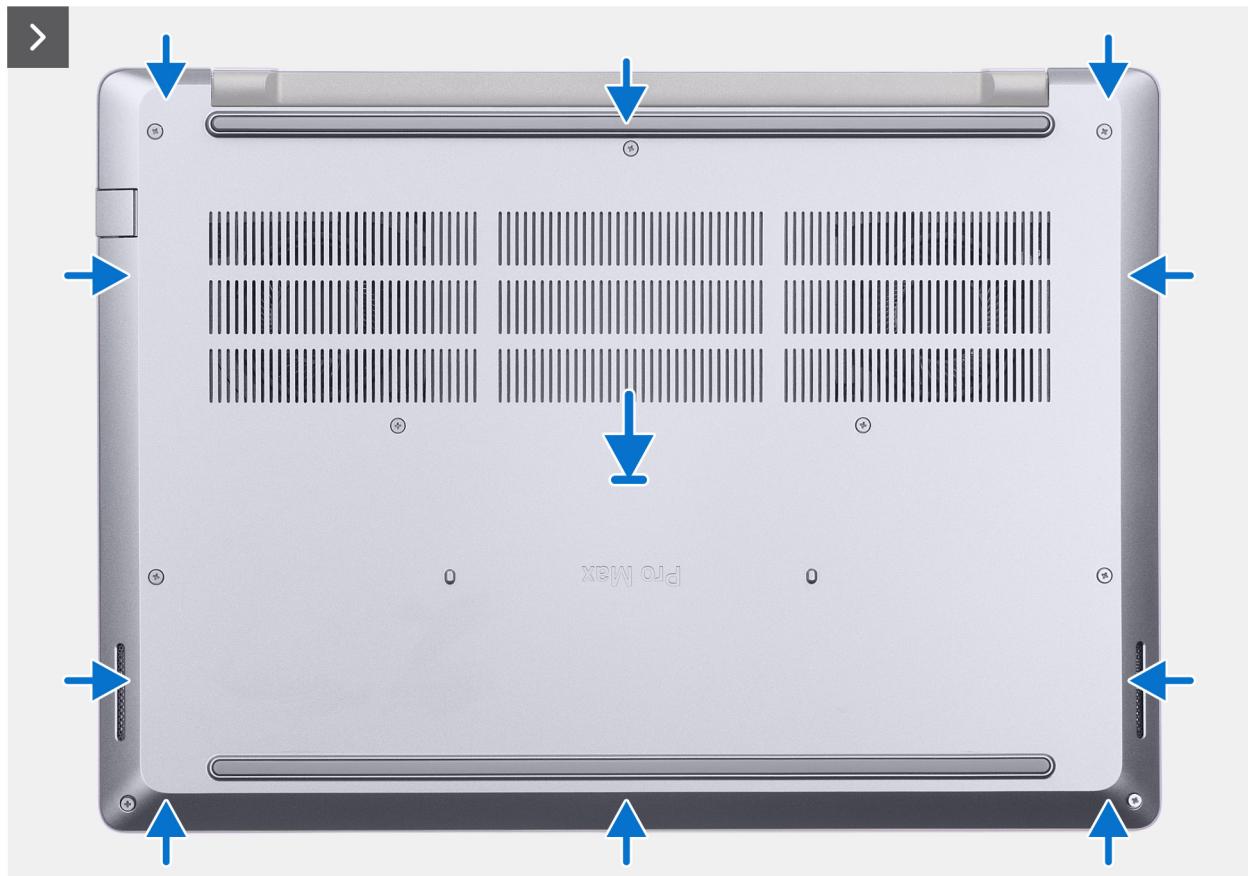

**Figure 15. Installing the base cover**

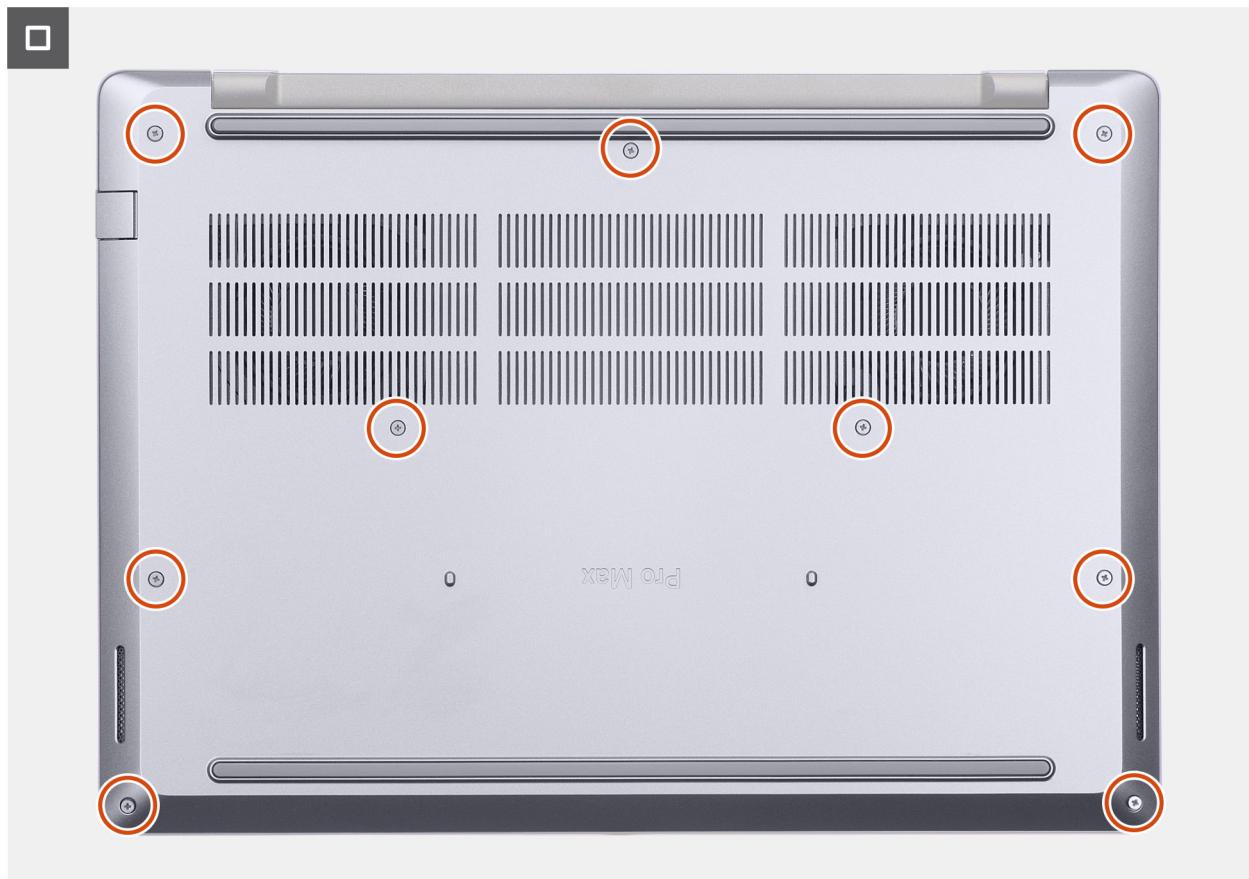

**Figure 16. Installing the base cover**

#### Steps

1. Connect the battery cable to the connector (BATT1) on the system board.
- i** **NOTE:** This step applies only to computers that are not in Service Mode.
2. Place the base cover on the palm-rest assembly.
3. Align the screw holes on the base cover with the screw holes on the palm-rest assembly, and then snap the base cover into place.
4. Tighten the nine captive screws to secure the base cover to the palm-rest assembly.

#### Next steps

1. Follow the procedure in [After working inside your computer](#).

## Battery

### Rechargeable Li-ion battery precautions



#### WARNING:

- Exercise caution when handling rechargeable Li-ion batteries.
- Discharge the battery completely before removing it. Disconnect the AC power adapter from the computer and operate the computer solely on battery power—the battery is fully discharged when the computer no longer turns on when the power button is pressed.
- Do not crush, drop, mutilate, or penetrate the battery with foreign objects.
- Do not expose the battery to high temperatures, or disassemble battery packs and cells.

- **Do not apply pressure to the surface of the battery.**
- **Do not bend the battery.**
- **Do not use tools of any kind to pry on or against the battery.**
- **To prevent accidental puncture or damage to the battery and other components, ensure that no screws are lost or misplaced during the servicing of the computer.**
- **Always purchase genuine batteries from Dell Site or authorized Dell partners and resellers.**
- **Swollen batteries should not be used and should be replaced and disposed properly. For guidelines on how to handle and replace swollen rechargeable Li-ion batteries, see [Handling swollen rechargeable Li-ion batteries](#).**

## Removing the battery


### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

### About this task

**CAUTION:** Removing the battery resets the BIOS setup settings to default. It is recommended that you note the BIOS setup settings before removing the battery.

The following image indicates the location of the battery and provides a visual representation of the removal procedure.

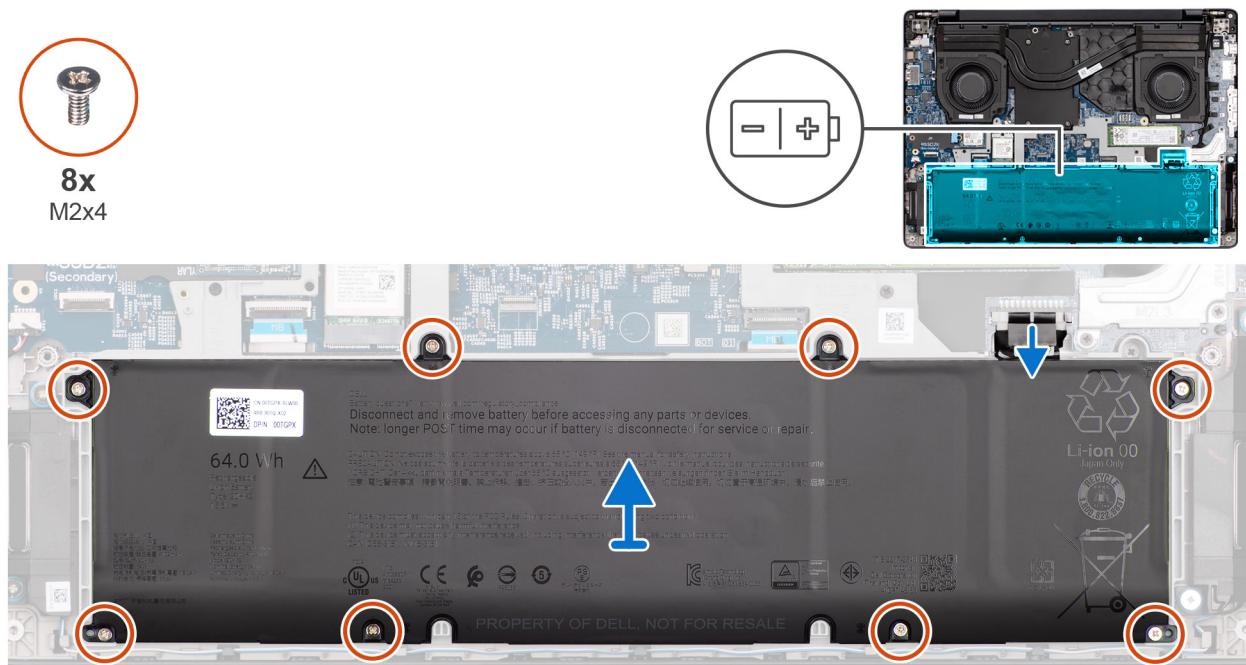

**Figure 17. Removing the battery**

### Steps

1. Disconnect the battery cable from the connector (BATT1) on the system board.
2. Remove the eight screws (M2x4) that secure the battery to the battery frame.
3. Lift the battery, along with the battery cable, off the palm-rest assembly.


# Installing the battery

## Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

## About this task

The following image indicates the location of the battery and provides a visual representation of the installation procedure.

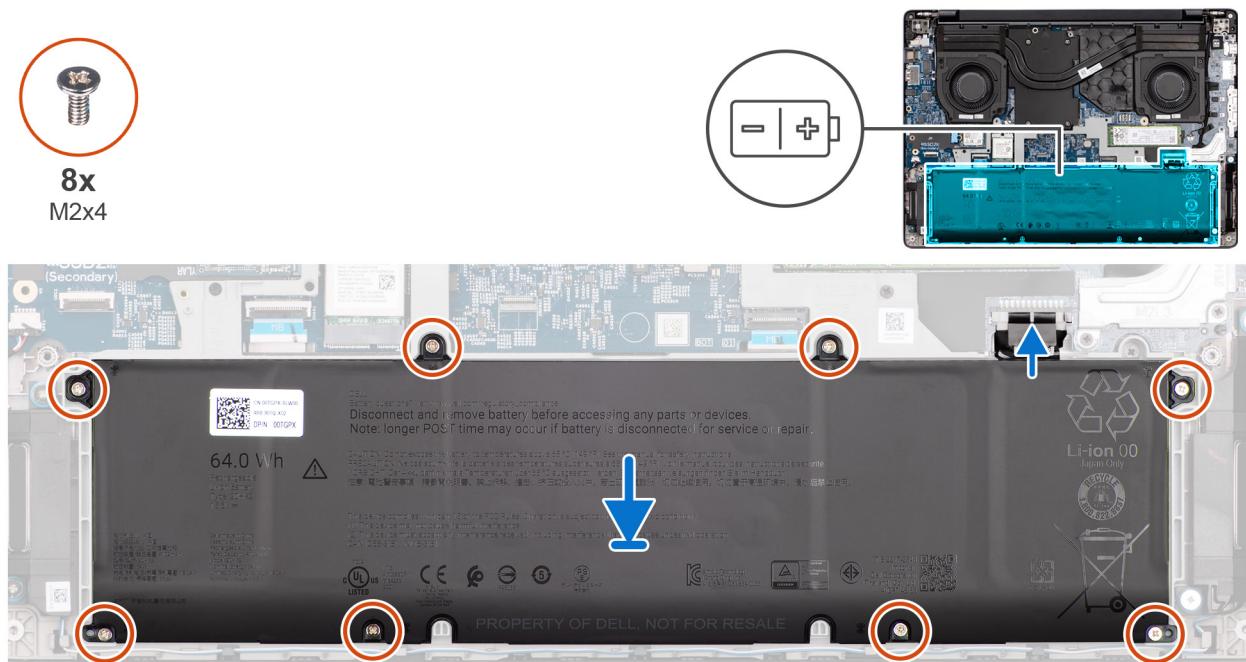

**Figure 18. Installing the battery**

## Steps

1. Place the battery, along with the battery cable, in the battery frame on the palm-rest assembly.
2. Align the screw holes on the battery with the screw holes on the battery frame.
3. Replace the eight screws (M2x4) to secure the battery to the battery frame.
4. Connect the battery cable to the connector (BATT1) on the system board.

## Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

# Battery cable


## Disconnecting the battery cable

## Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [battery](#).

## About this task

The following image indicates the location of the battery cable and provides a visual representation of the removal procedure.

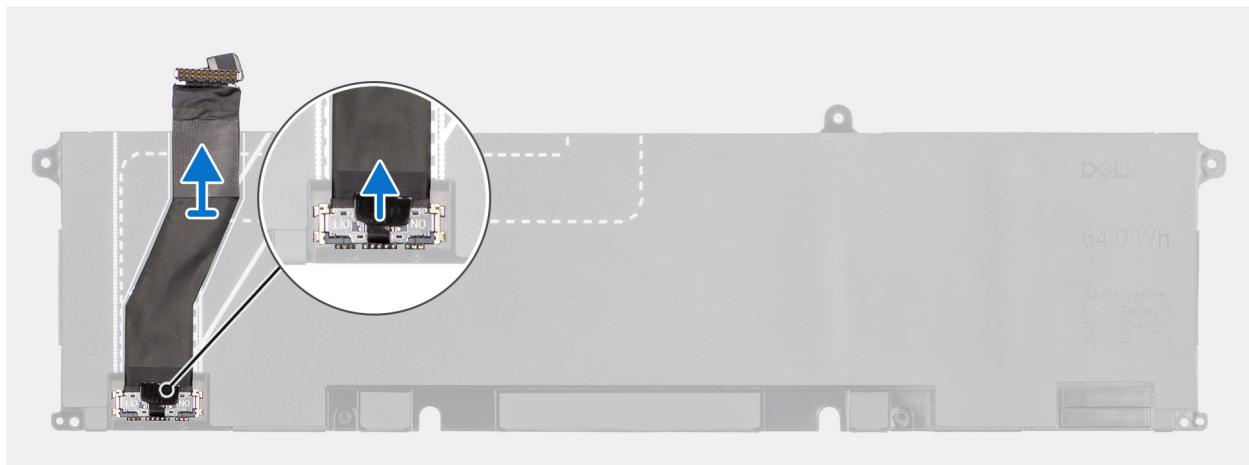

**Figure 19. Disconnecting the battery cable**

## Steps

1. Peel back the battery cable from the battery.
2. Disconnect the battery cable from the connector on the battery.


## Connecting the battery cable

### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task

The following image indicates the location of the battery cable and provides a visual representation of the installation procedure.

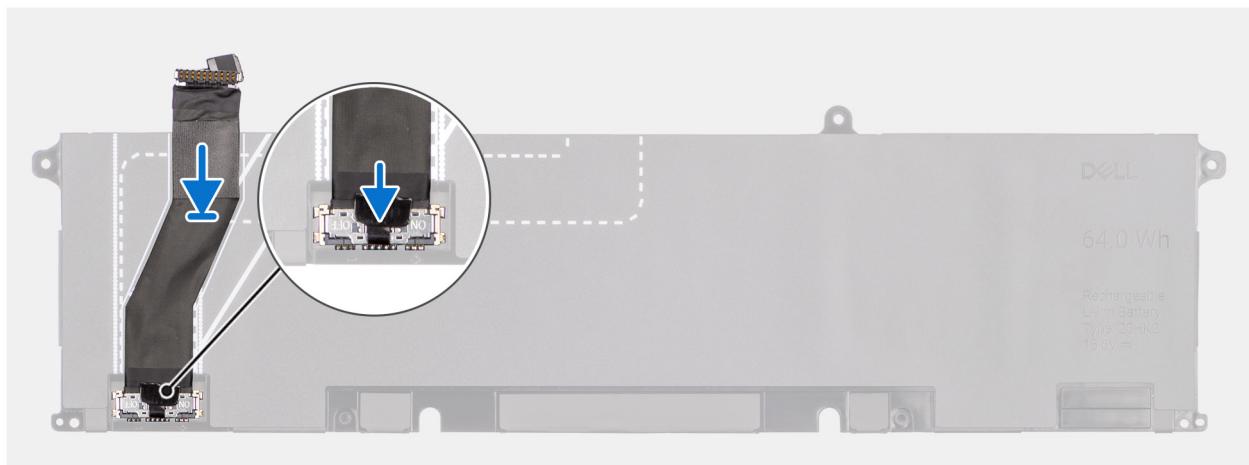

**Figure 20. Connecting the battery cable**

## Steps

1. Connect the battery cable to the connector on the battery.  
**NOTE:** The connector on the battery cable has a switch that enables power supply to the computer. When connecting the battery cable to the battery, ensure that the switch on the connector is turned on.
2. Adhere the battery cable to the battery.

## Next steps

1. Install the [battery](#).
2. Install the [base cover](#).
3. Follow the procedure in [After working inside your computer](#).

# Solid-state drive


## Removing the M.2 2230 solid state drive

### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

### About this task

The following images indicate the location of the M.2 2230 solid state drive (SSD) and provide a visual representation of the removal procedure.

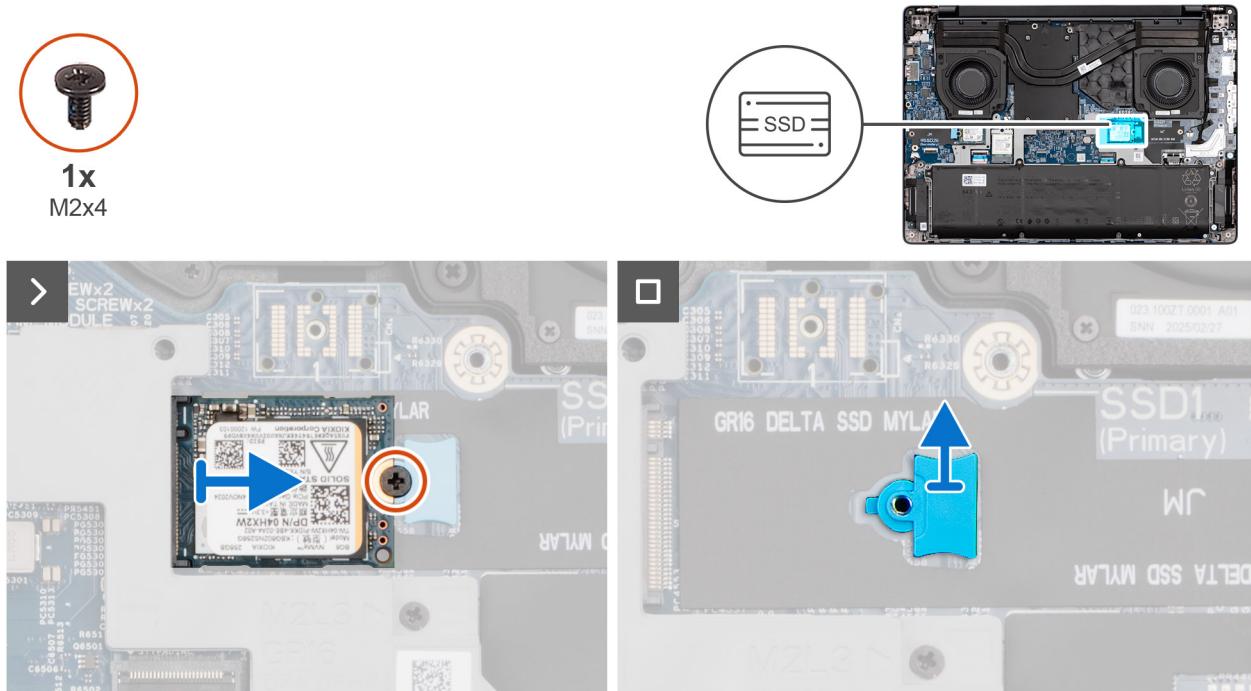

**Figure 21. Removing the M.2 2230 solid state drive**

### Steps

1. Remove the screw (M2x4) that secures the M.2 2230 solid state drive to the palm-rest assembly.
2. Remove the M.2 2230 solid state drive from the M.2 card slot (SSD1 or SSD2, whichever is applicable) on the system board.
3. Remove the M.2230 SSD holder from the system board.

**(i) NOTE:** This step applies only if you are replacing a M.2 2230 solid state drive with a M.2 2280 solid state drive.


## Installing the M.2 2230 solid state drive

### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

## About this task

The following images indicate the location of the M.2 2230 solid state drive (SSD) and provide a visual representation of the installation procedure.

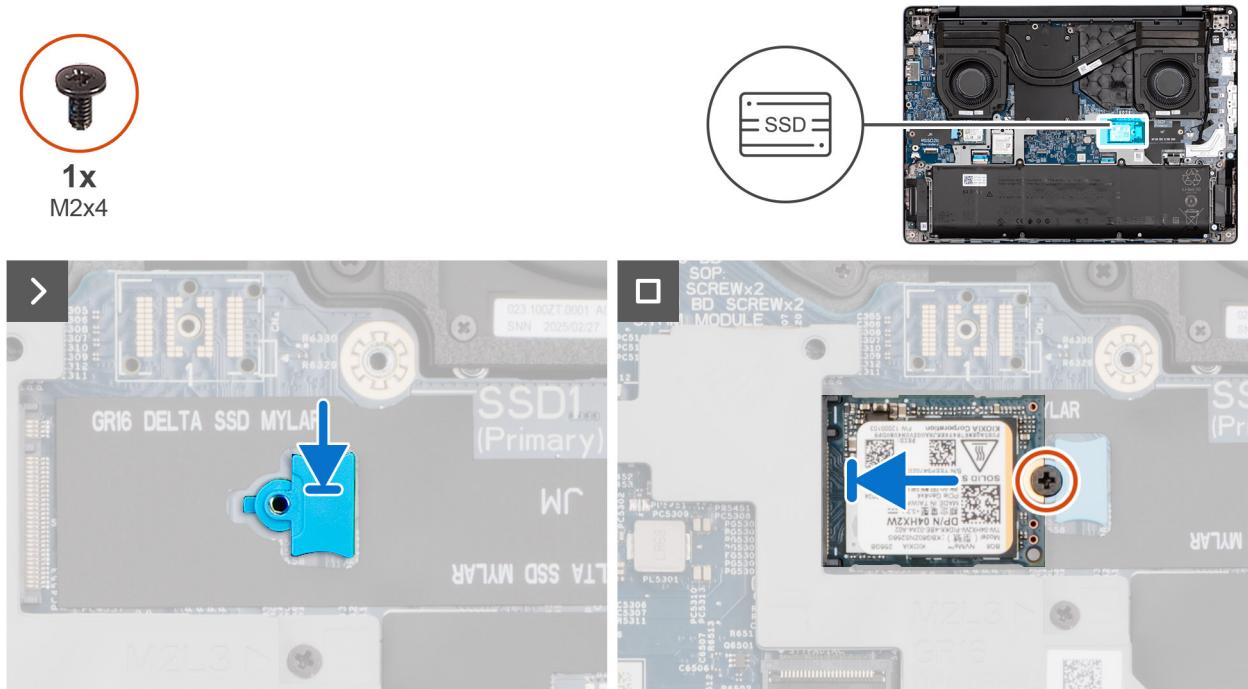

**Figure 22. Installing the M.2 2230 solid state drive**

## Steps

1. Align and place the M.2230 SSD holder in its slot on the system board.  
**NOTE:** This step applies only if you are replacing a M.2 2280 solid state drive with a M.2 2230 solid state drive.
2. Align the notch on the M.2 2230 solid state drive to the tab on the M.2 card slot (SSD1 or SSD2, whichever is applicable) on the system board.
3. Slide the M.2 2230 solid state drive at an angle into the M.2 card slot on the system board.
4. Replace the screw (M2x4) to secure the M.2 2230 solid state drive to the palm-rest assembly.

## Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).


## Removing the M.2 2280 solid state drive

### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

### About this task

The following image indicates the location of the M.2 2280 solid state drive (SSD) and provides a visual representation of the removal procedure.

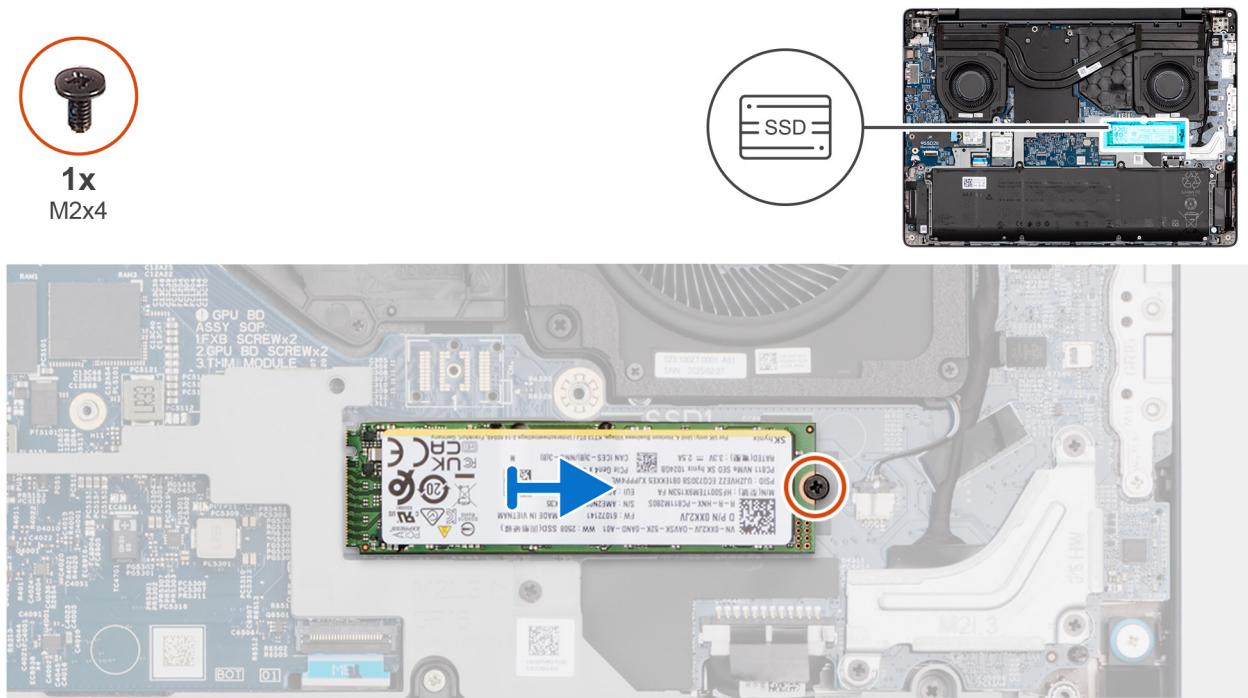

**Figure 23. Removing the M.2 2280 solid state drive**

#### Steps

1. Remove the screw (M2x4) that secures the M.2 2280 solid state drive to the system board.
2. Remove the M.2 2280 solid state drive from the M.2 card slot (SSD1 or SSD2, whichever is applicable) on the system board.


## Installing the M.2 2280 solid state drive

#### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

#### About this task

The following image indicates the location of the M.2 2280 solid state drive (SSD) and provides a visual representation of the installation procedure.

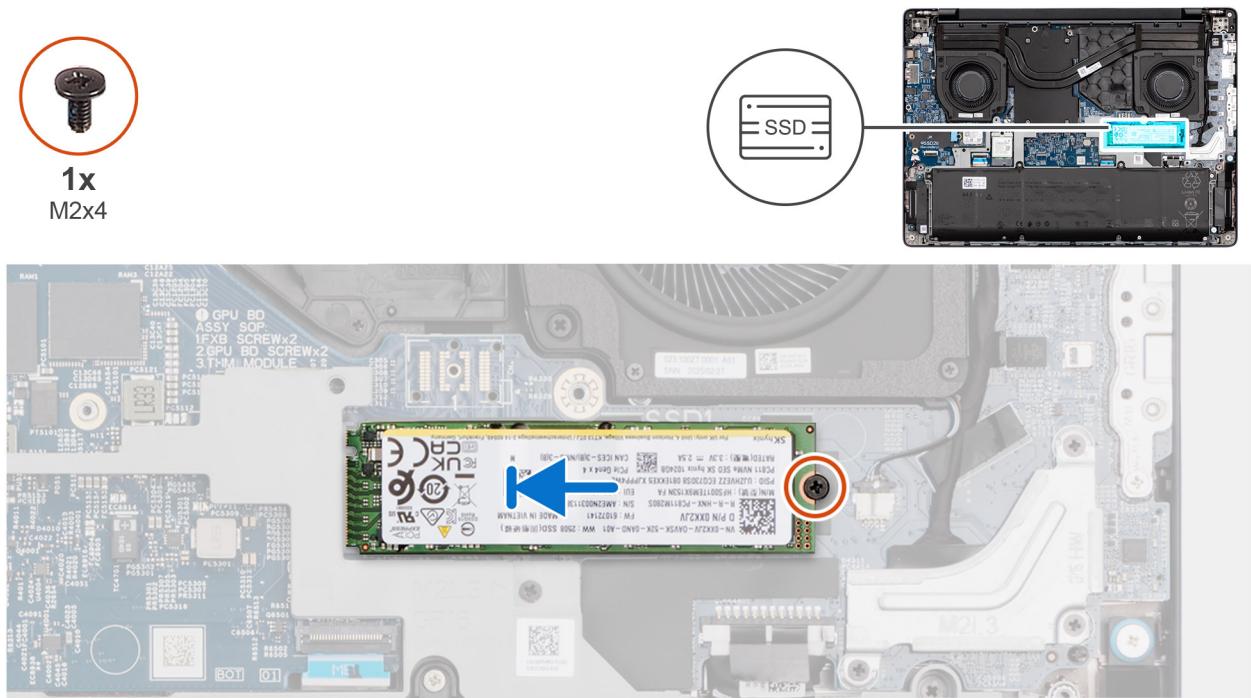

**Figure 24. Installing the M.2 2280 solid state drive**

### Steps

1. Align the notch on the M.2 2280 solid state drive to the tab on the M.2 card slot (SSD1 or SSD2, whichever is applicable) on the system board.
2. Slide the M.2 2280 solid state drive at an angle into the M.2 card slot on the system board.
3. Replace the screw (M2x4) to secure the M.2 2280 solid state drive to the system board.

### Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

## Wireless card


### Removing the wireless card

#### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

#### About this task

The following images indicate the location of the wireless card and provide a visual representation of the removal procedure.

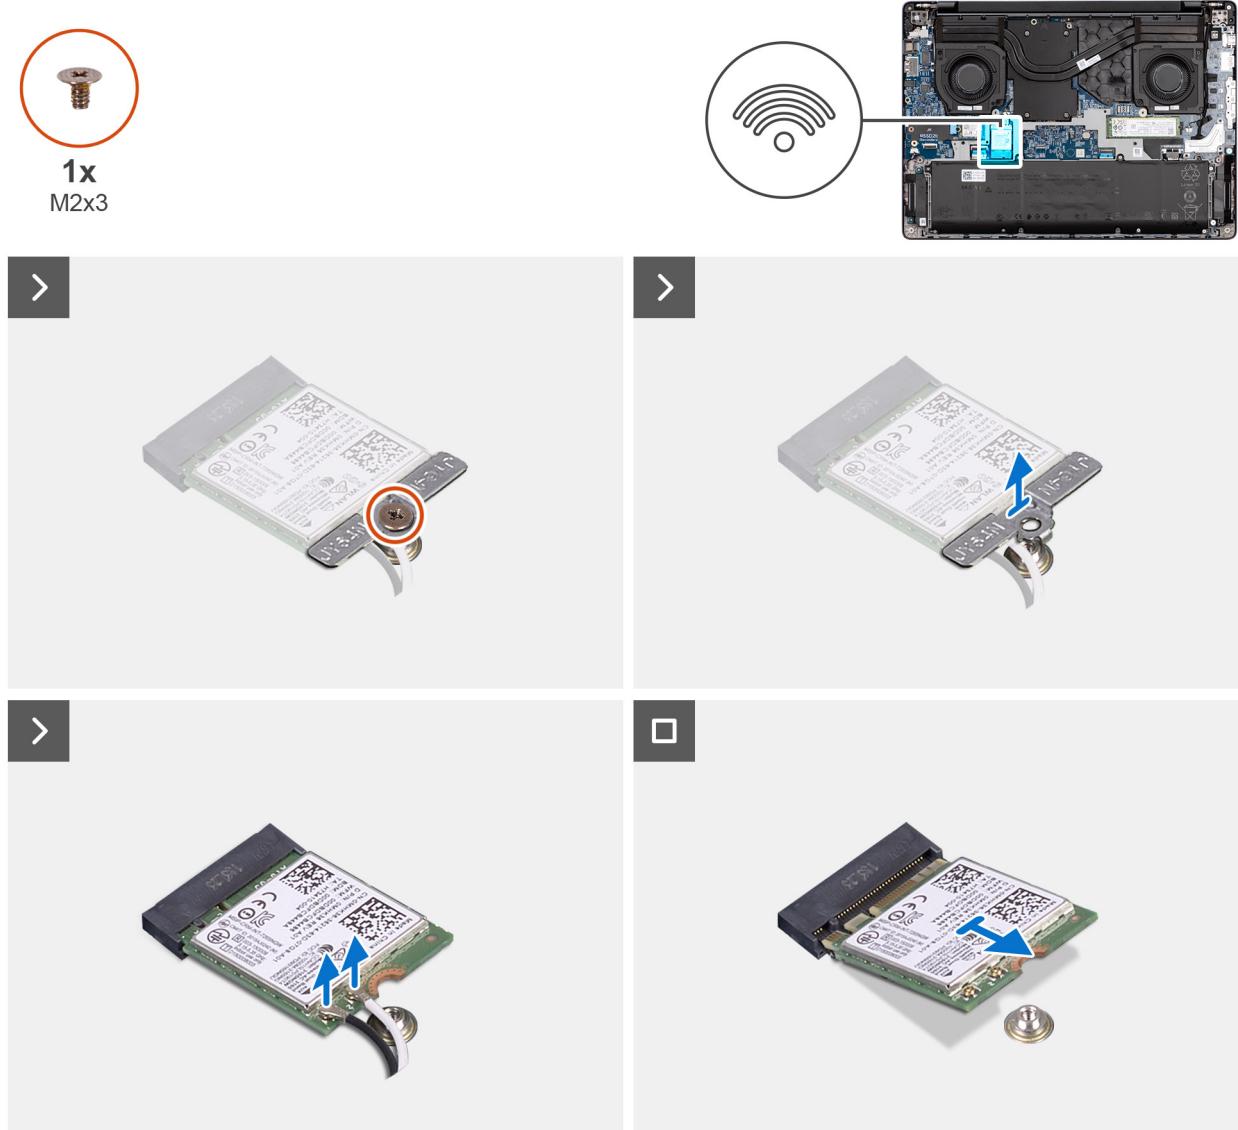

**Figure 25. Removing the wireless card**

### Steps

1. Remove the screw (M2x3) that secures the wireless-card bracket to the system board.
2. Lift the wireless-card bracket off the wireless card.
3. Disconnect the wireless-antenna cables from the connectors on the wireless card.
4. Slide and remove the wireless card from the wireless-card slot (WLAN1) on the system board.


## Installing the wireless card

### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task

The following images indicate the location of the wireless card and provide a visual representation of the installation procedure.

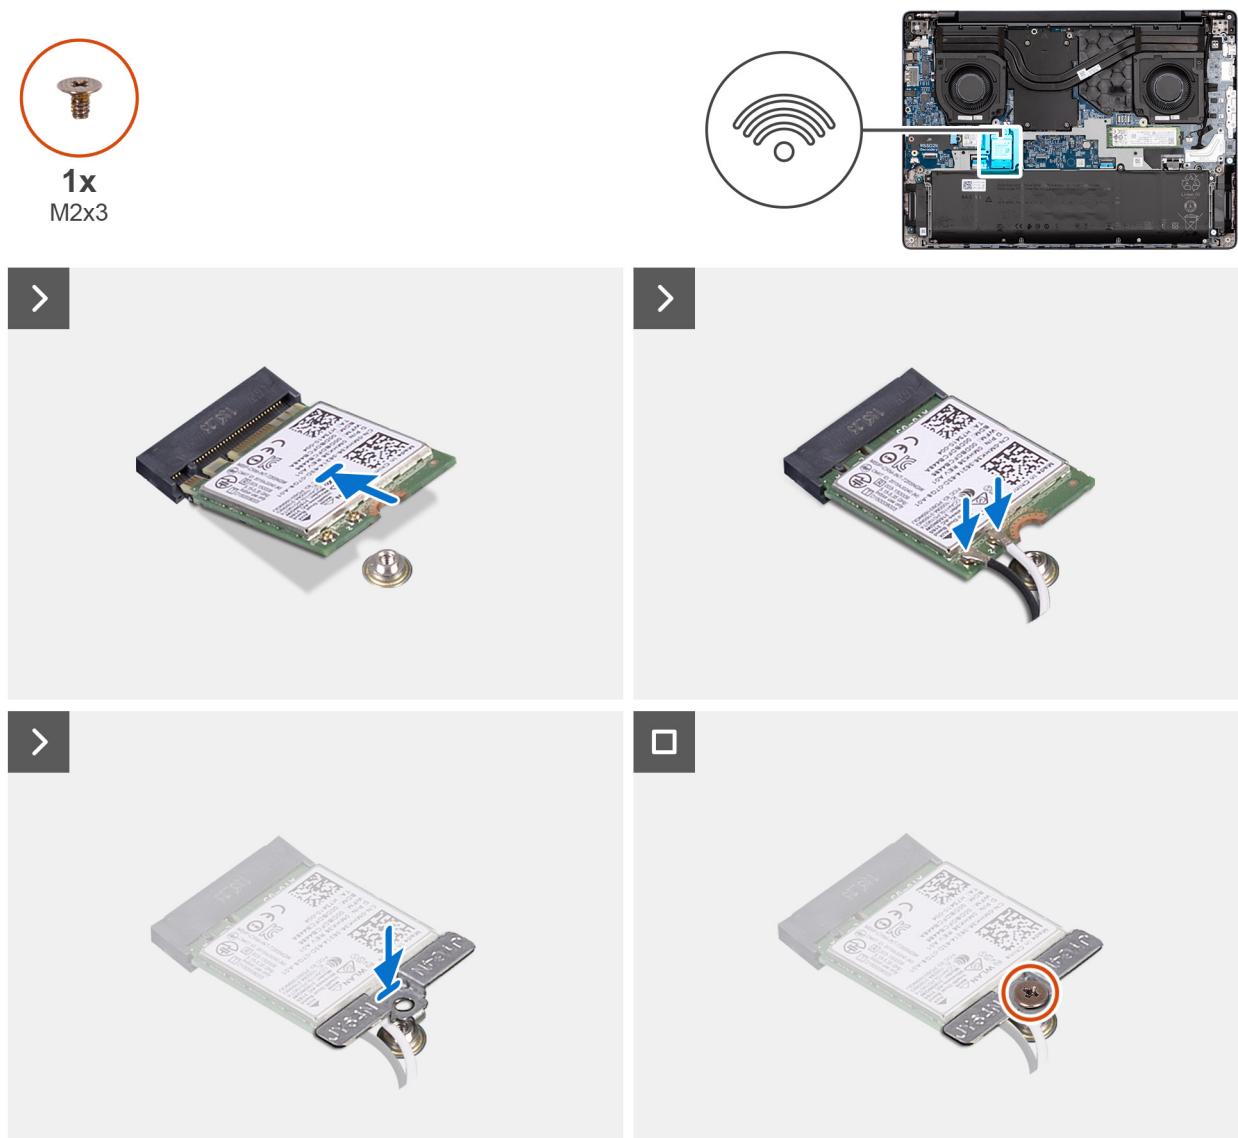

**Figure 26. Installing the wireless card**

#### Steps

1. Align the notch on the wireless card to the tab on the wireless-card slot (WLAN1) on the system board.
2. Slide the wireless card at an angle into the wireless-card slot on the system board.
3. Connect the wireless-antenna cables to the connectors on the wireless card.

The following table provides the antenna-cable color scheme for the wireless card supported by your computer.

**Table 36. Antenna-cable color scheme**

Connector on the wireless card	Antenna-cable color	Silkscreen marking	
Main	White	MAIN	△ (white triangle)
Auxiliary	Black	AUX	▲ (black triangle)

4. Place the wireless-card bracket on the wireless card.
5. Align the screw hole on the wireless-card bracket with the screw hole on the system board.
6. Replace the screw (M2x3) to secure the wireless-card bracket and the wireless card to the system board.

## Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

# Speakers


## Removing the speakers

### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

### About this task

The following images indicate the location of the speakers and provide a visual representation of the removal procedure.

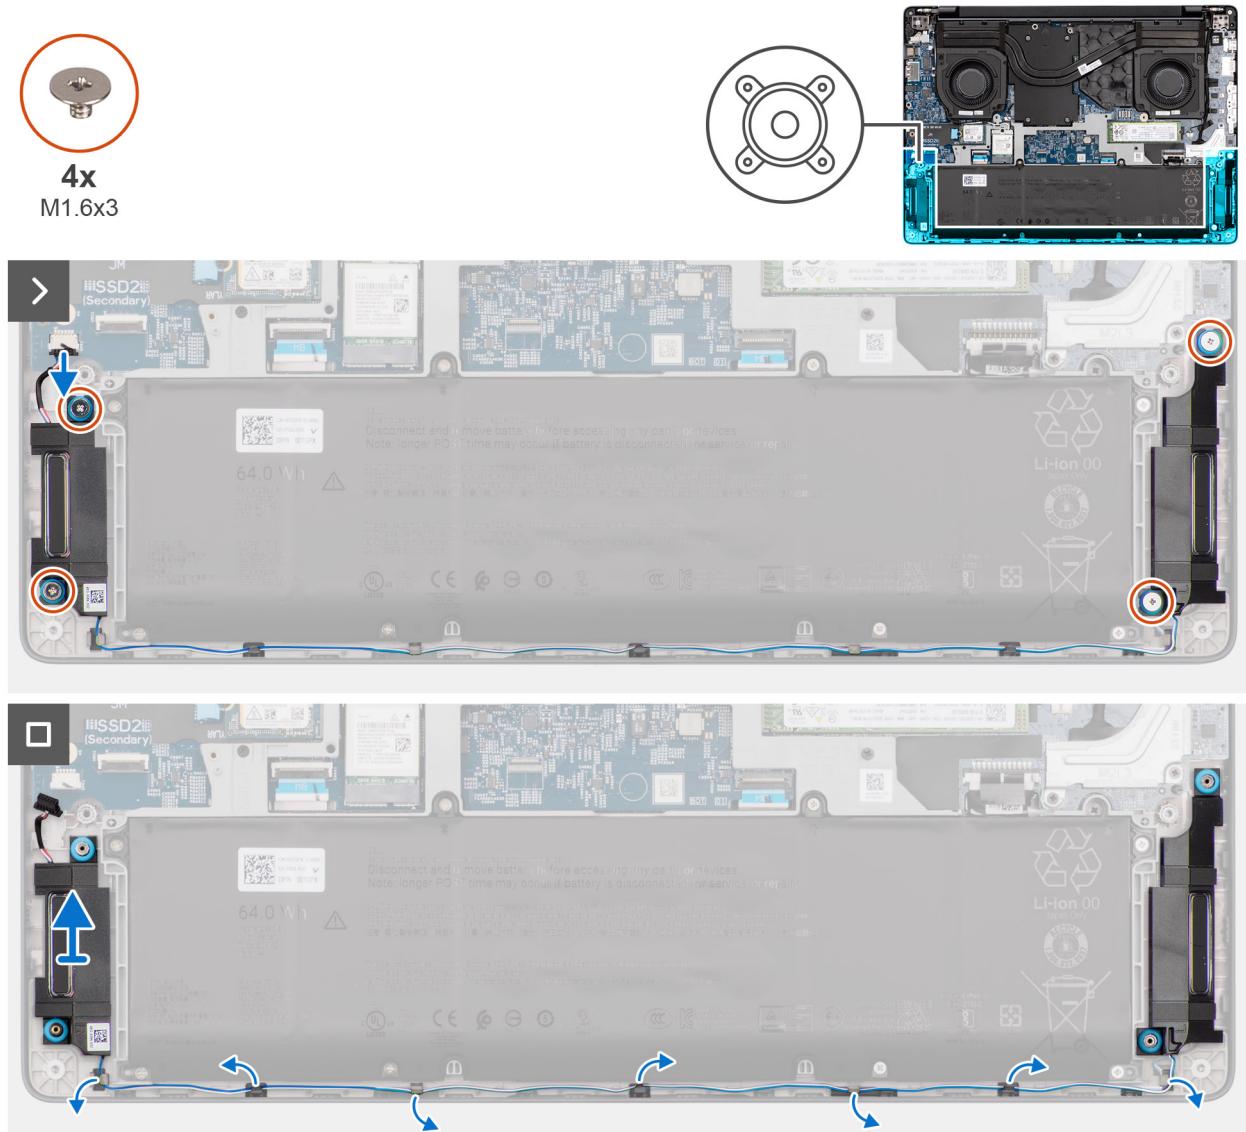

**Figure 27. Removing the speakers**

## Steps

1. Disconnect the speaker cable from the connector (SPK1) on the system board.
2. Remove the four screws (M1.6x3) that secure the speakers to the palm-rest assembly.
3. Carefully remove the speaker cable from the routing guides on the palm-rest assembly.
4. Lift the speakers, along with the cable, off the palm-rest assembly.

## Installing the speakers

### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task

**NOTE:** If the rubber grommets are pushed out when removing the speakers, push them back in before replacing the speakers.

The following images indicate the location of the speakers and provide a visual representation of the installation procedure.


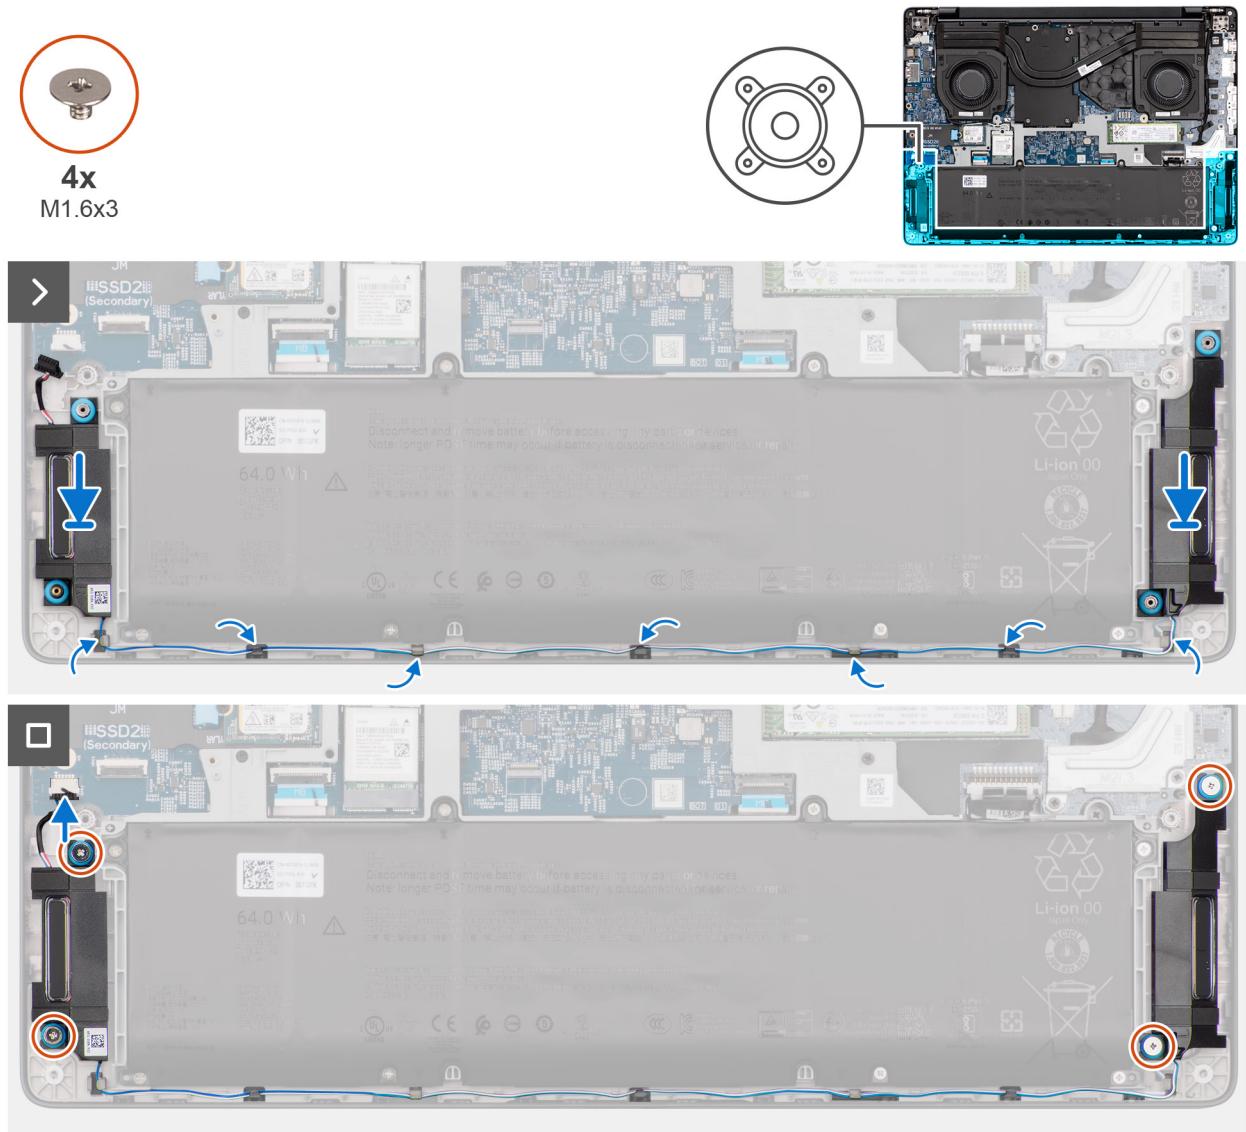


Figure 28. Installing the speakers

## Steps

1. Using the alignment posts and rubber grommets, place the speakers in the slots on the palm-rest assembly.  
**NOTE:** Ensure that the rubber grommets on the speakers are threaded through the alignment posts. Ensure that the four rubber grommets are seated into the slot and installed on the speakers properly.

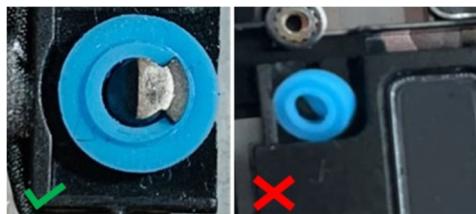

**Figure 29. Installing the speakers**

2. Route the speaker cable through the routing guides on the palm-rest assembly.
3. Replace the four screws (M1.6x3) to secure the speakers to the palm-rest assembly.
4. Connect the speaker cable to the connector (SPK1) on the system board.

## Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

# Right/Processor fan


## Removing the right/processor fan

### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [wireless card](#).

### About this task

The following images indicate the location of the right/processor fan and provide a visual representation of the removal procedure.

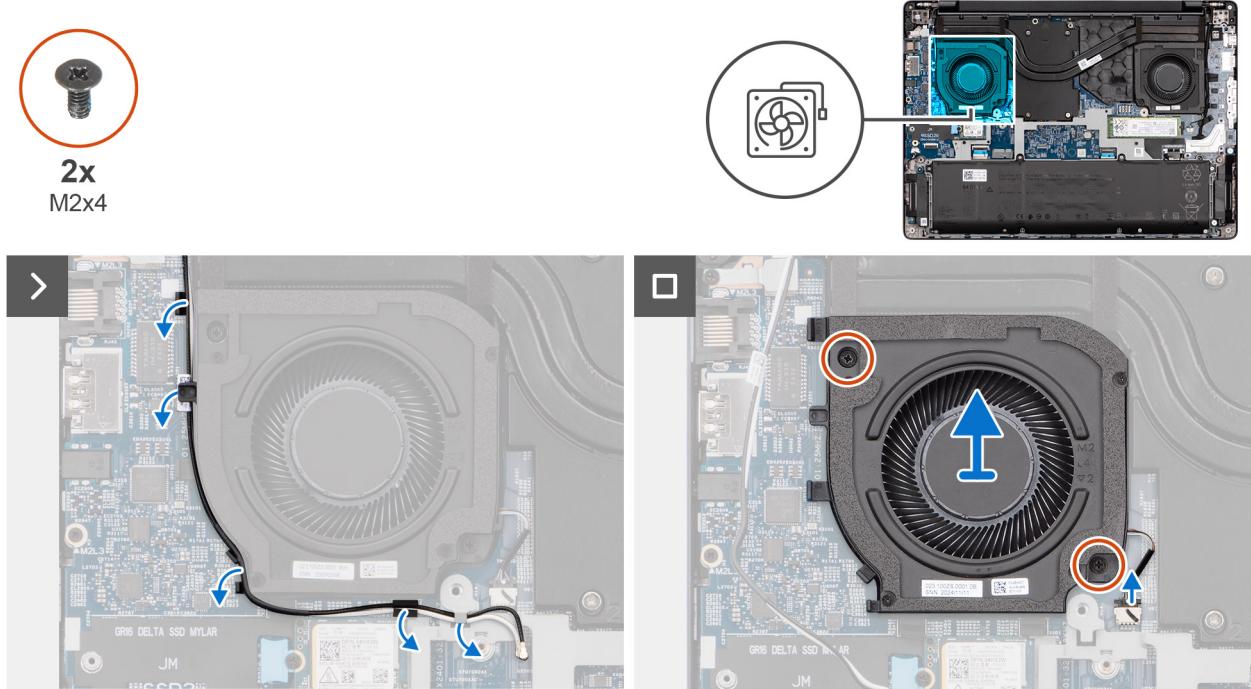

**Figure 30. Removing the right/processor fan**

### Steps

1. Remove the wireless-antenna cables from the routing guides on the fan.
2. Disconnect the fan cable from the connector (FANL1) on the system board.
3. Remove the two screws (M2x4) that secure the fan to the palm-rest assembly.
4. Lift the right/processor fan off the palm-rest assembly.

## Installing the right/processor fan

### Prerequisites



If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task

The following images indicate the location of the right/processor fan and provide a visual representation of the installation procedure.



**2x**  
M2x4

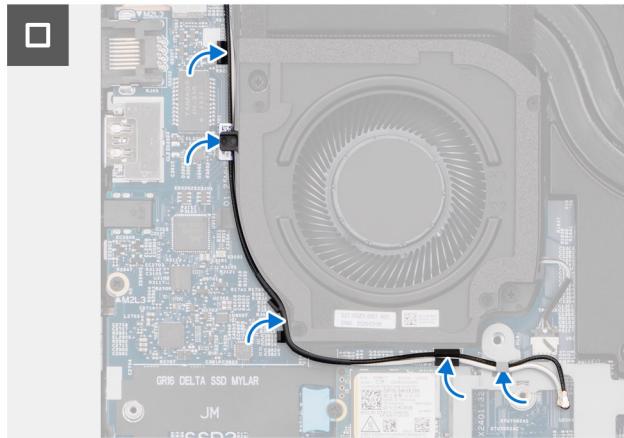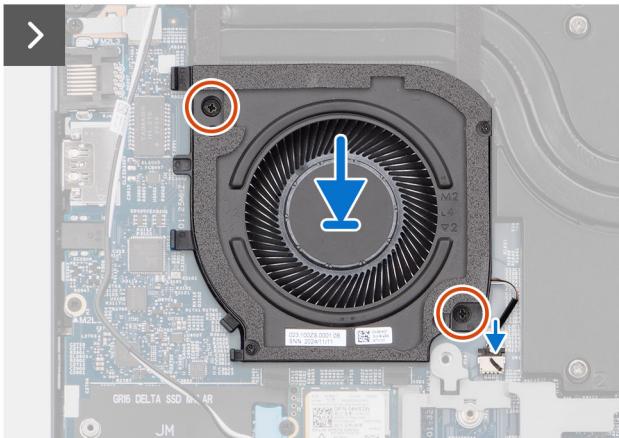

**Figure 31. Installing the right/processor fan**

#### Steps

1. Place the right/processor fan in the slot on the palm-rest assembly.
2. Align the screw holes on the fan with the screw holes on the palm-rest assembly.
3. Replace the two screws (M2x4) to secure the fan to the palm-rest assembly.
4. Connect the fan cable to the connector (FANL1) on the system board.
5. Route the wireless-antenna cables through the routing guides on the fan.

#### Next steps

1. Install the [wireless card](#).
2. Install the [base cover](#).
3. Follow the procedure in [After working inside your computer](#).

## Left/Video fan


### Removing the left/video fan

#### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

#### About this task

The following images indicate the location of the left/video fan and provide a visual representation of the removal procedure.

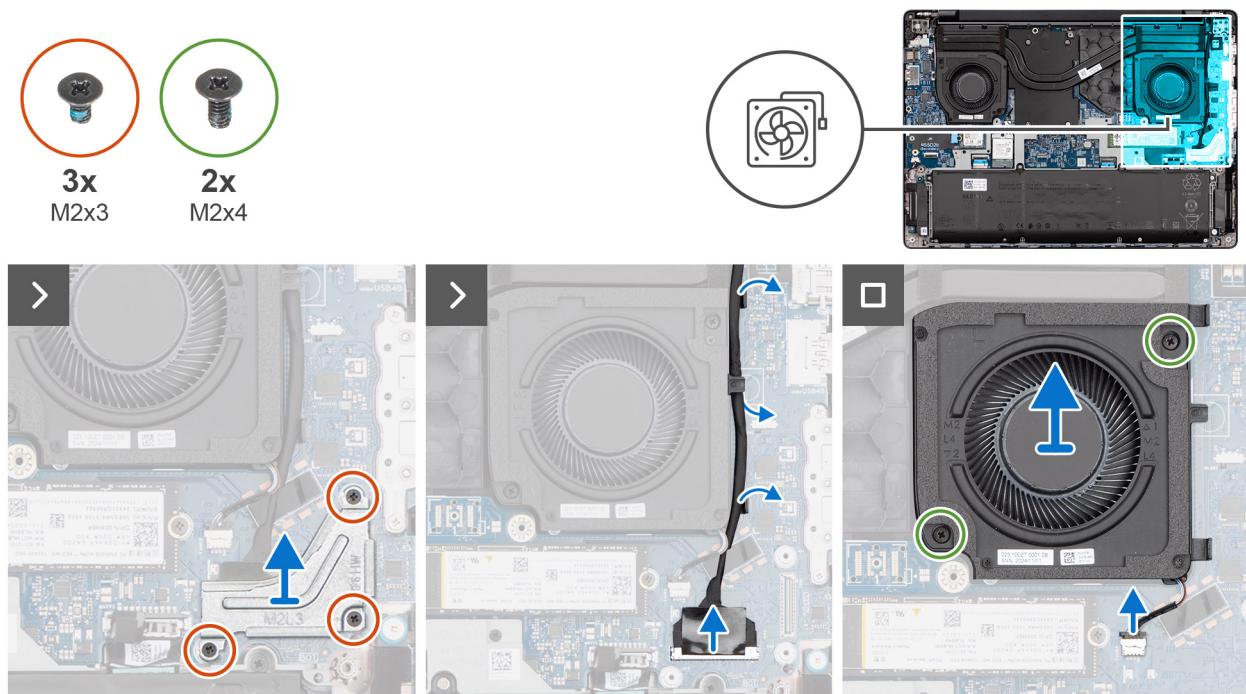

**Figure 32. Removing the left/video fan**

### Steps

1. Remove the three screws (M2x3) that secure the display-cable bracket to the system board.
2. Lift the display-cable bracket off the system board.
3. Disconnect the display cable from the connector (LCD1) on the system board.
4. Disconnect the IR-camera cable from the connector (CAM1) on the system board.
5. Remove the display cable and the IR-camera cable, if available, from the routing guides on the fan.
6. Disconnect the fan cable from the connector (FANR2) on the system board.
7. Remove the two screws (M2x4) that secure the fan to the palm-rest assembly.
8. Lift the left/video fan off the palm-rest assembly.

**i** **NOTE:** This step applies only to computers shipped with an IR camera installed.


## Installing the left/video fan

### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task

The following images indicate the location of the left/video fan and provide a visual representation of the installation procedure.

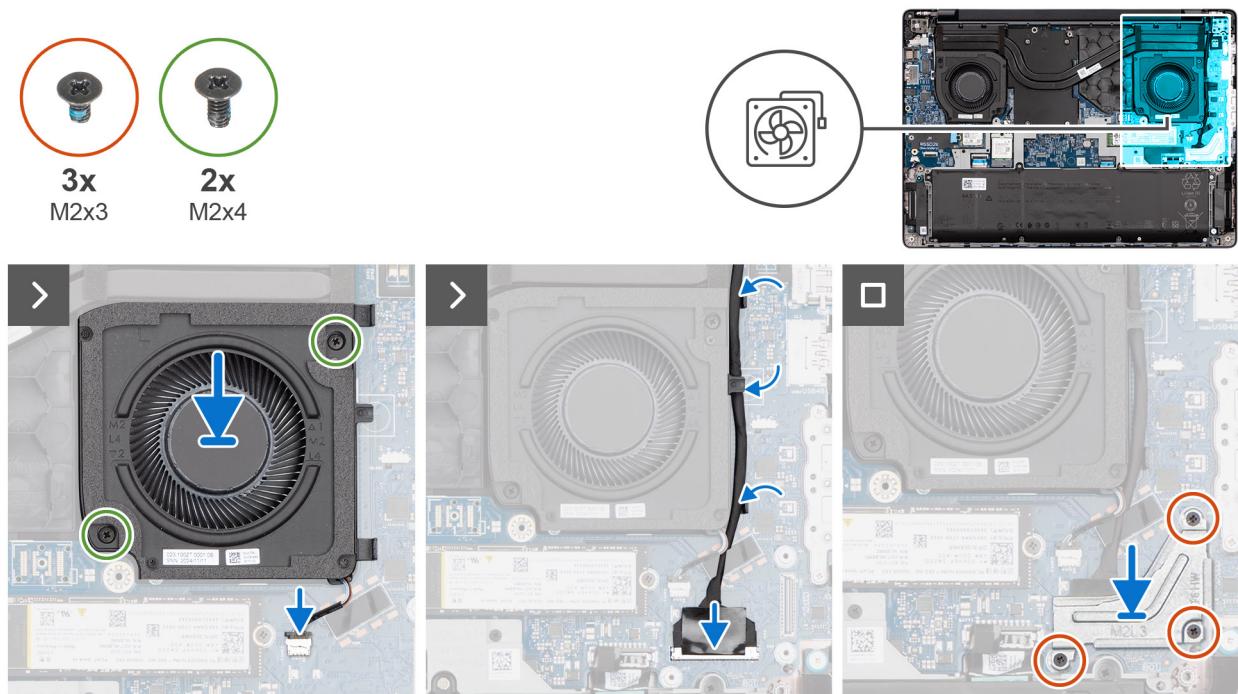

**Figure 33. Installing the left/video fan**

### Steps

1. Place the left/video fan in the slot on the palm-rest assembly.
2. Align the screw holes on the fan with the screw holes on the palm-rest assembly.
3. Replace the two screws (M2x4) to secure the fan to the palm-rest assembly.
4. Connect the fan cable to the connector (FANR2) on the system board.
5. Route the display cable and the IR-camera cable, if available, through the routing guides on the fan.
6. Connect the display cable to the connector (LCD1) on the system board.
7. Connect the IR-camera cable to the connector (CAM1) on the system board.

**i** **NOTE:** This step applies only to computers shipped with an IR camera installed.

8. Align and place the display-cable bracket over the display cable and the IR-camera cable, if available, on the system board.
9. Replace the three screws (M2x3) to secure the display-cable bracket to the system board.

### Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

# Removing and installing Field Replaceable Units (FRUs)

The replaceable components in this chapter are Field Replaceable Units (FRUs).

 **CAUTION:** The information in this section is intended for authorized service technicians only.

 **CAUTION:** To avoid any potential damage to the component or loss of data, ensure that an authorized service technician replaces the Field Replaceable Units (FRUs).

 **CAUTION:** Dell Technologies recommends that these procedures be performed by trained technical repair specialists.

 **CAUTION:** Your warranty does not cover damages that may occur during FRU repairs that are not authorized by Dell Technologies.

 **NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

## Heat sink

### Removing the heat sink

 **CAUTION:** The information in this removal section is intended for authorized service technicians only.

#### Prerequisites


1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

#### About this task

 **NOTE:** The heat sink may become hot during normal operation. Allow sufficient time for the heat sink to cool before you touch it.

 **NOTE:** For optimal cooling of the processor, do not touch the heat-transfer areas on the heat sink. The oils in your skin can reduce the heat-transfer capability of the thermal grease.

The following image indicates the location of the heat sink and provides a visual representation of the removal procedure.

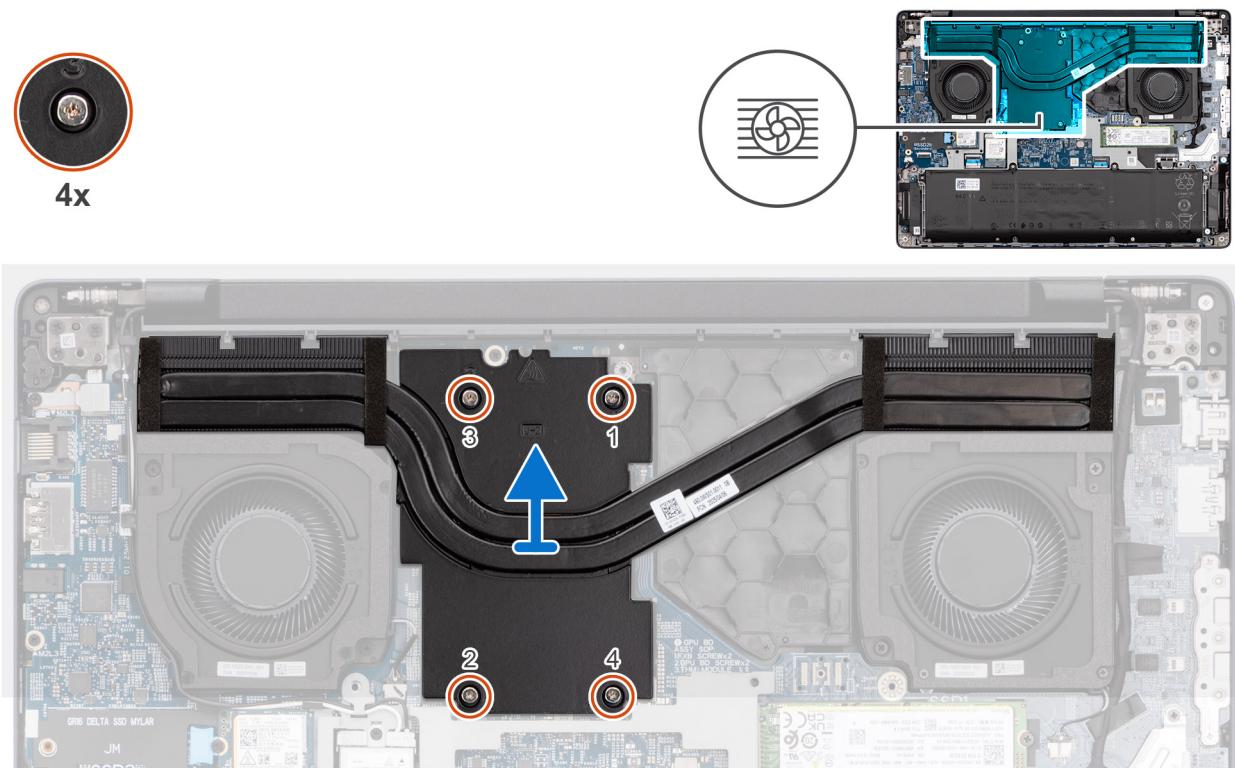

**Figure 34. Removing the heat sink**

### Steps

1. In reverse sequential order ( $4 > 3 > 2 > 1$ ), loosen the four captive screws that secure the heat sink to the system board. The screw numbers are etched on the heat sink.
2. Lift the heat sink off the system board.

## Installing the heat sink

**CAUTION:** The information in this installation section is intended for authorized service technicians only.


### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task

**NOTE:** If either the system board or the heat sink is replaced, use the thermal grease that is provided in the kit to ensure that thermal conductivity is achieved.

The following image indicates the location of the heat sink and provides a visual representation of the installation procedure.

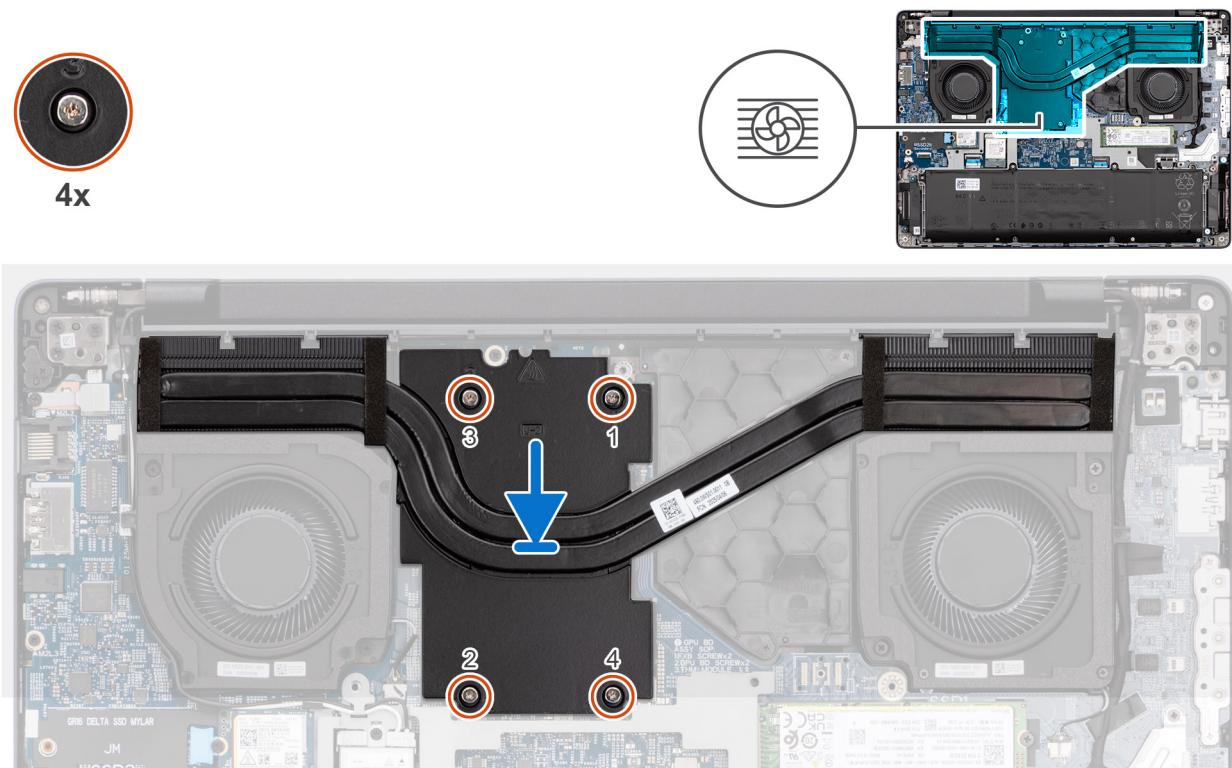

**Figure 35. Installing the heat sink**

### Steps

1. Place the heat sink in the slot on the system board.
2. Align the screw holes on the heat sink with the screw holes on the system board.
3. In sequential order (1 > 2 > 3 > 4), tighten the four captive screws to secure the heat sink to the system board. The screw numbers are etched on the heat sink.

### Next steps

1. Install the [base cover](#).
2. Follow the procedure in [After working inside your computer](#).

## GPU filler

### Removing the GPU filler

 **CAUTION:** The information in this removal section is intended for authorized service technicians only.

#### Prerequisites


1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [heat sink](#).

#### About this task

The following images indicate the location of the GPU filler board and provide a visual representation of the removal procedure.



**2x**  
M2x3

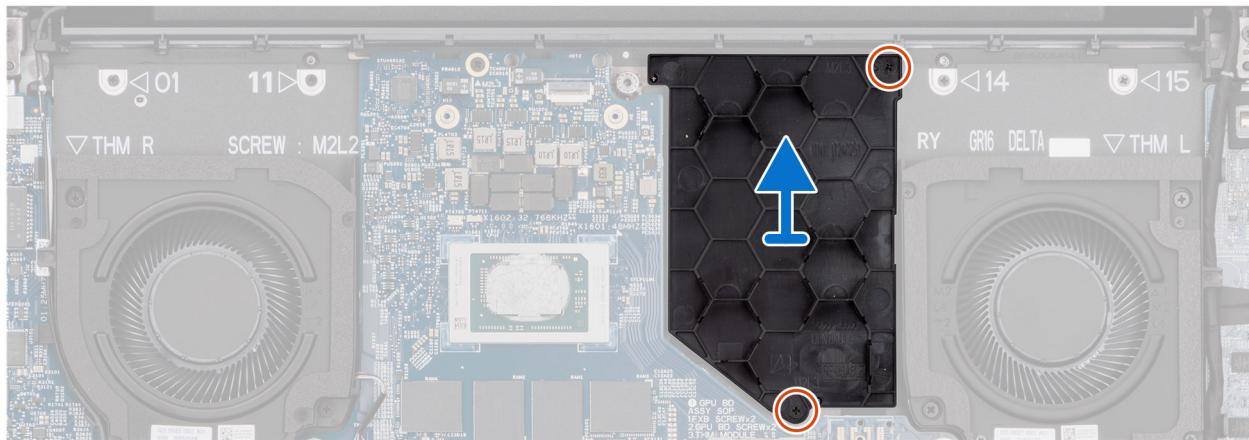

**Figure 36. Removing the GPU filler**

#### Steps

1. Remove the two screws (M2x3) that secure the GPU filler to the palm-rest assembly.
2. Lift the GPU filler off the palm-rest assembly.

## Installing the GPU filler

 **CAUTION:** The information in this installation section is intended for authorized service technicians only.

#### Prerequisites


If you are replacing a component, remove the existing component before performing the installation procedure.

#### About this task

The following images indicate the location of the GPU filler and provide a visual representation of the installation procedure.



**2x**  
M2x3

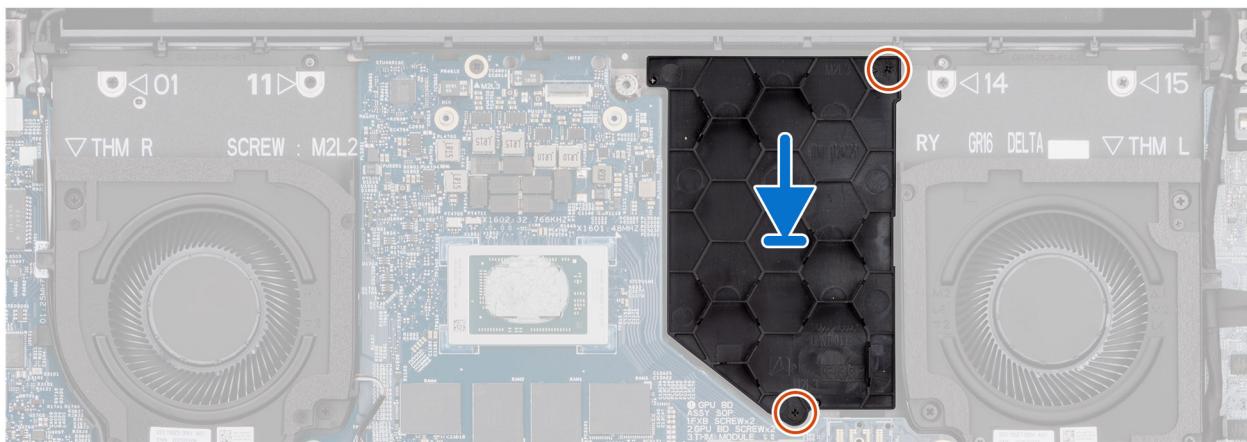

**Figure 37. Installing the GPU filler**

#### Steps

1. Align and place the GPU filler in the slot on the palm-rest assembly.
2. Replace the two screws (M2x3) to secure the GPU filler to the palm-rest assembly.

#### Next steps

1. Install the [heat sink](#).
2. Install the [base cover](#).
3. Follow the procedure in [After working inside your computer](#).

## Battery frame

### Removing the battery frame


 **CAUTION:** The information in this removal section is intended for authorized service technicians only.

#### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [battery](#).
4. Remove the [wireless card](#).

#### About this task

The following images indicate the location of the battery frame and provide a visual representation of the removal procedure.

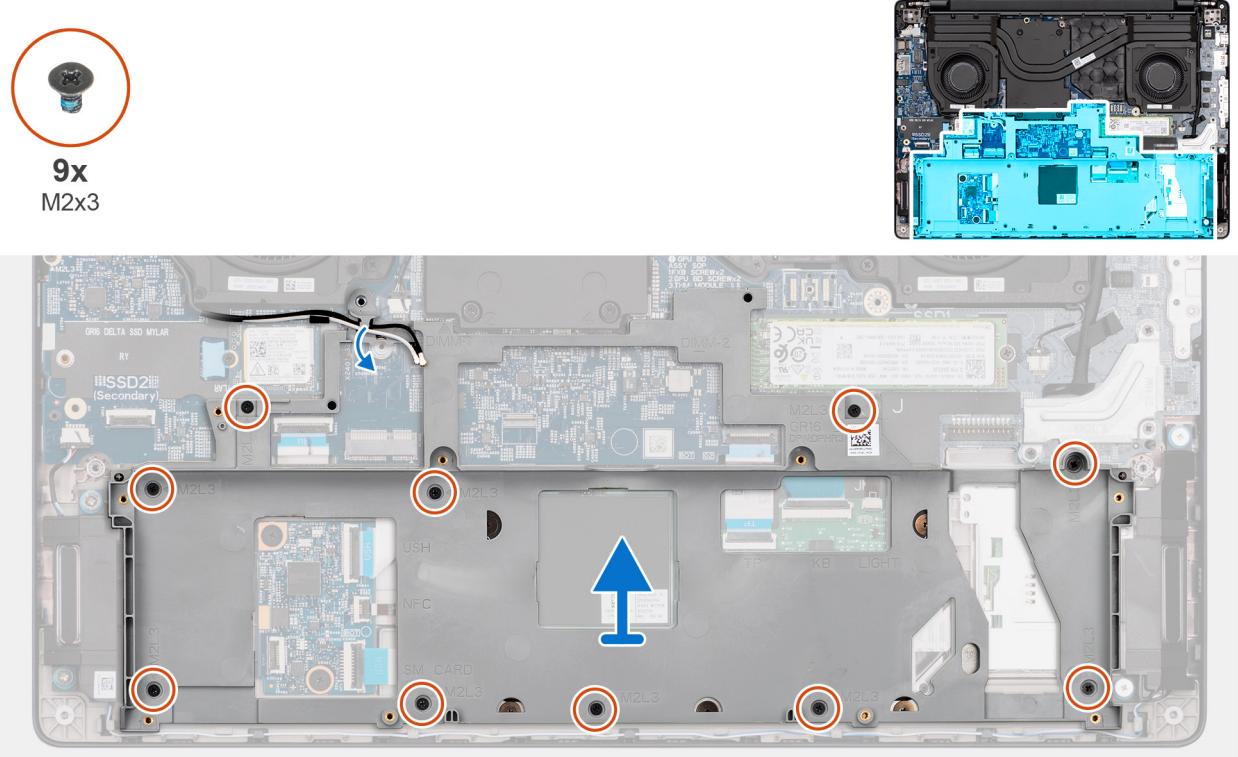

**Figure 38. Removing the battery frame**

#### Steps

1. Remove the ten screws (M2x3) that secure the battery frame to the palm-rest assembly.
2. Lift the battery frame off the palm-rest assembly.

## Installing the battery frame


**CAUTION:** The information in this installation section is intended for authorized service technicians only.

#### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

#### About this task

The following images indicate the location of the battery frame and provide a visual representation of the installation procedure.

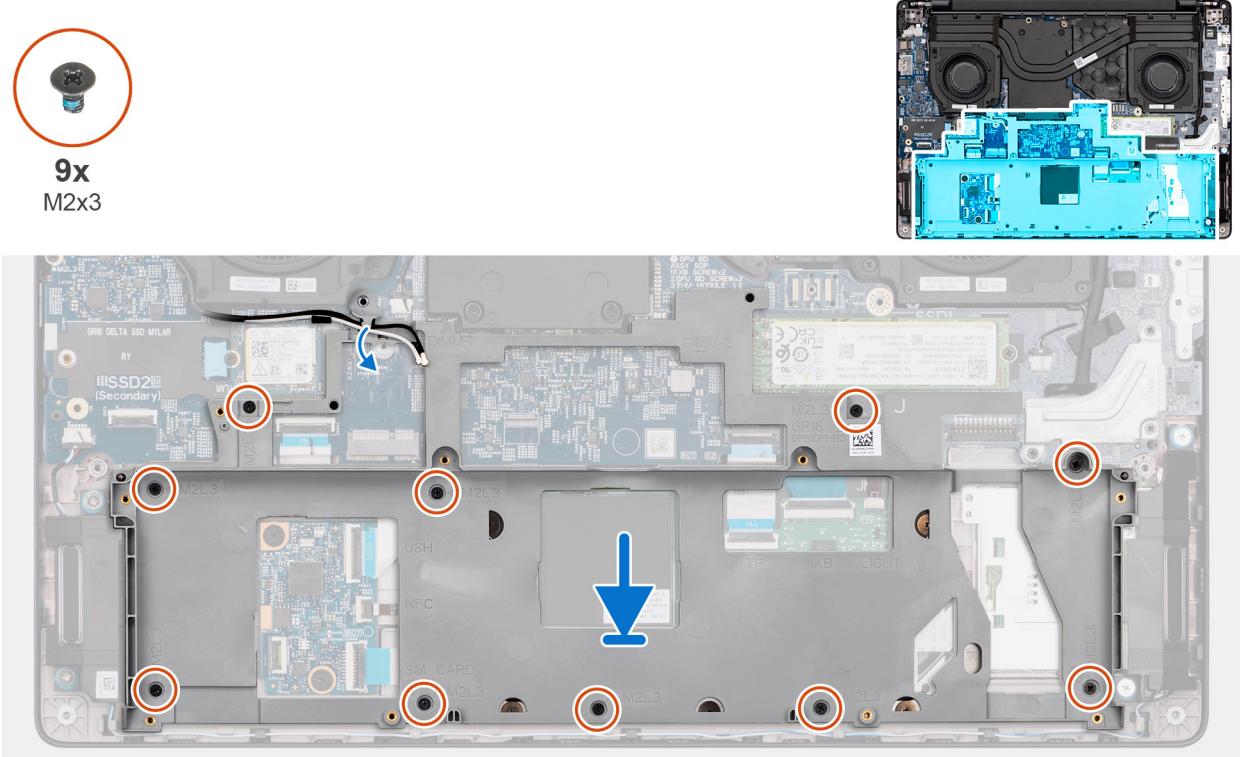

**Figure 39. Installing the battery frame**

#### Steps

1. Align and place the battery frame in the slot on the palm-rest assembly.
2. Replace the ten screws (M2x3) to secure the battery frame to the palm-rest assembly.

#### Next steps

1. Install the [wireless card](#).
2. Install the [battery](#).
3. Install the [base cover](#).
4. Follow the procedure in [After working inside your computer](#).

## USH board

### Removing the USH board


 **CAUTION:** The information in this removal section is intended for authorized service technicians only.

#### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [battery](#).
4. Remove the [wireless card](#).
5. Remove the [battery frame](#).

#### About this task

The following images indicate the location of the USH board and provide a visual representation of the removal procedure.

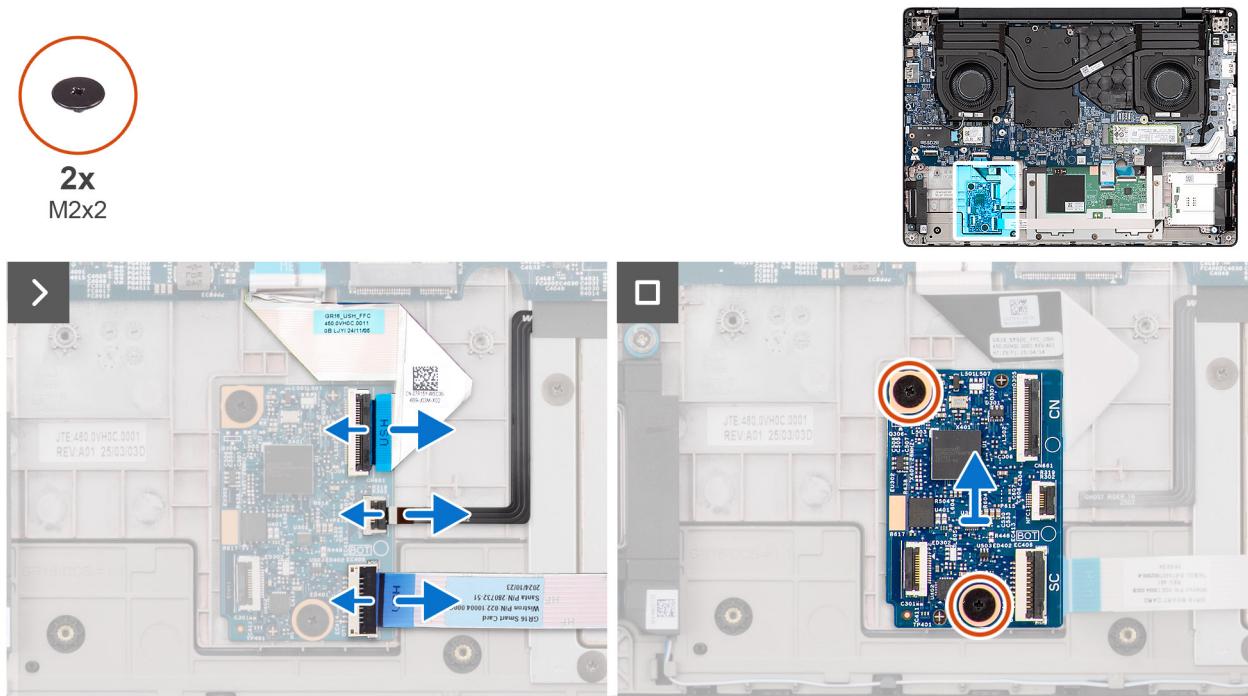

**Figure 40. Removing the USH board**

### Steps

1. Disconnect the USH-board cable from the connector (CN) on the USH board.
2. Disconnect the smart-card reader cable from the connector (SC) on the USH board.

**i | NOTE:** This step applies only to computers shipped with a smart-card reader installed.

3. Disconnect the NFC-sensor cable from the connector (NFC1) on the USH board.

**i | NOTE:** This step applies only to computers shipped with an NFC sensor installed.

4. Remove the two screws (M2x2) that secure the USH board to the palm-rest assembly.
5. Lift the USH board off the palm-rest assembly.

## Installing the USH board


**⚠ | CAUTION:** The information in this installation section is intended for authorized service technicians only.

### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task

The following images indicate the location of the USH board and provide a visual representation of the installation procedure.

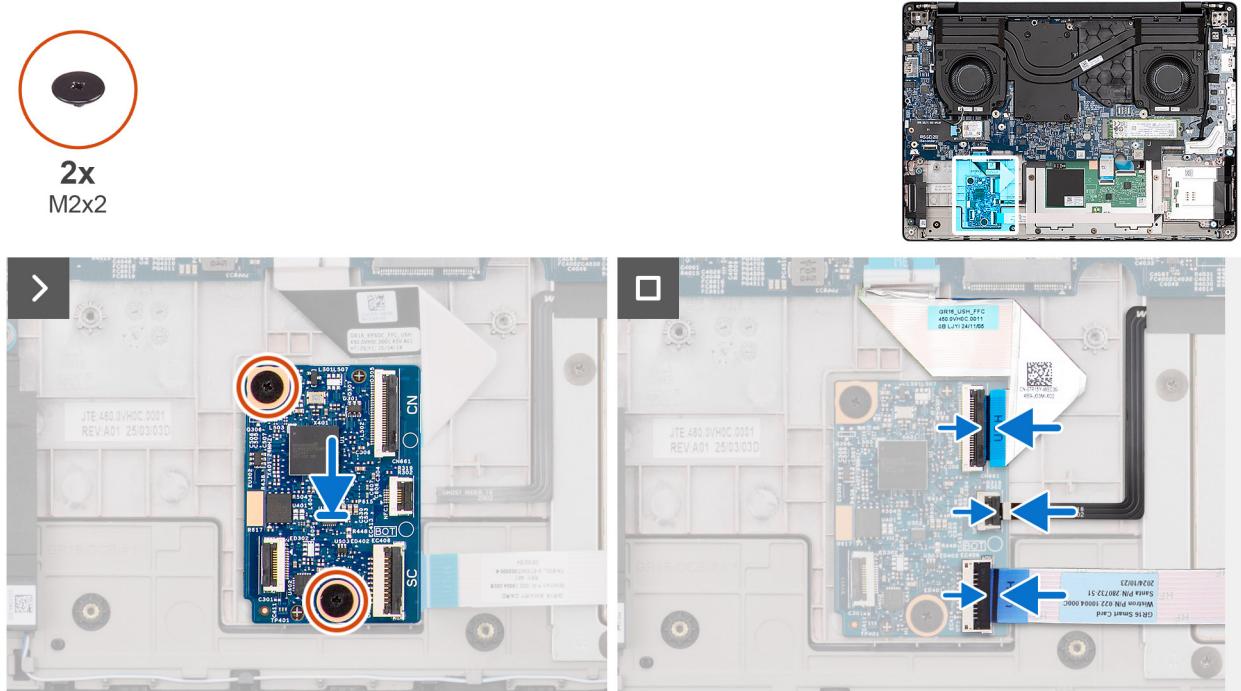

**Figure 41. Installing the USH board**

### Steps

1. Align and place the USH board in the slot on the palm-rest assembly.
2. Replace the two screws (M2x2) to secure the USH board to the palm-rest assembly.
3. Connect the USH-board cable to the connector (CN) on the USH board.
4. Connect the smart-card reader cable to the connector (SC) on the USH board.

**i** **NOTE:** This step applies only to computers shipped with a smart-card reader installed.

5. Connect the NFC-sensor cable to the connector (NFC1) on the USH board.

**i** **NOTE:** This step applies only to computers shipped with an NFC sensor installed.

### Next steps

1. Install the [battery frame](#).
2. Install the [wireless card](#).
3. Install the [battery](#).
4. Install the [base cover](#).
5. Follow the procedure in [After working inside your computer](#).

## Smart-card reader

### Removing the smart-card reader

**⚠ CAUTION:** The information in this removal section is intended for authorized service technicians only.

**i** **NOTE:** This procedure applies only to computers shipped with an NFC sensor or smart-card reader installed.


### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).

2. Remove the [base cover](#).
3. Remove the [battery](#).
4. Remove the [wireless card](#).
5. Remove the [speakers](#).
6. Remove the [battery frame](#).

#### About this task

The following images indicate the location of the smart-card reader and provide a visual representation of the removal procedure.

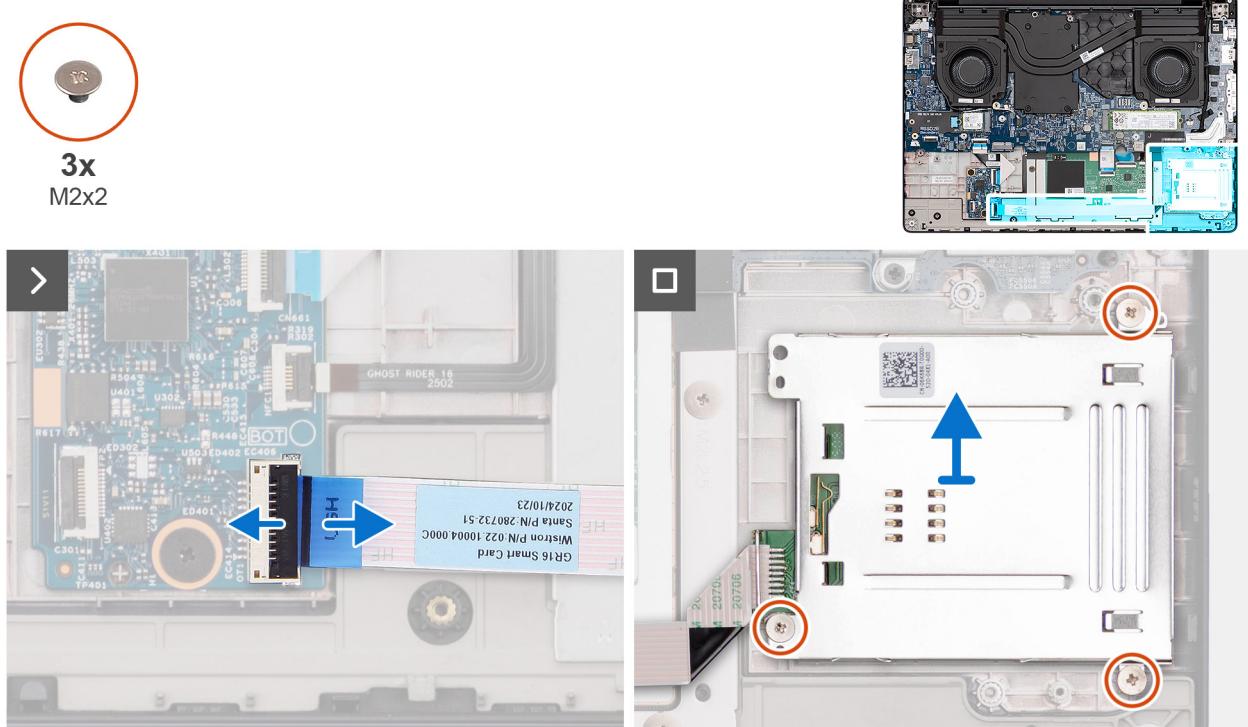

**Figure 42. Removing the smart-card reader**

#### Steps

1. Disconnect the NFC sensor or smart-card reader cable, whichever is applicable, from the connector (SC) on the USH board.
2. Remove the three screws (M2x2) that secure the smart-card reader to the palm-rest assembly.
3. Lift the smart-card reader off the palm-rest assembly.

## Installing the smart-card reader

**⚠ CAUTION:** The information in this installation section is intended for authorized service technicians only.


**ⓘ NOTE:** This procedure applies only to computers shipped with an NFC sensor or smart-card reader installed.

#### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

#### About this task

The following images indicate the location of the smart-card reader and provide a visual representation of the installation procedure.

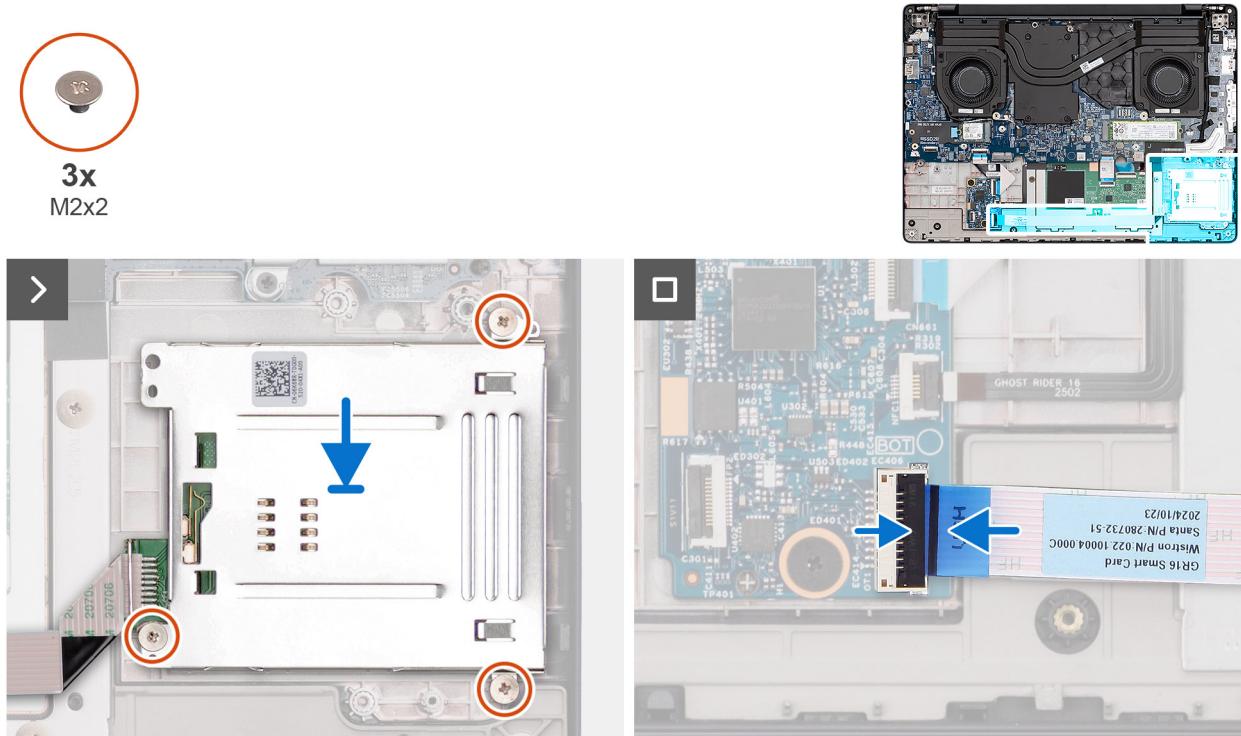

**Figure 43. Installing the smart-card reader**

#### Steps

1. Align and place the smart-card reader in the slot on the palm-rest assembly.
2. Replace the three screws (M2x2) to secure the smart-card reader to the palm-rest assembly.
3. Connect the NFC sensor or smart-card reader cable, whichever is applicable, to the connector (SC) on the USH board.

#### Next steps

1. Install the [battery frame](#).
2. Install the [speakers](#).
3. Install the [wireless card](#).
4. Install the [battery](#).
5. Install the [base cover](#).
6. Follow the procedure in [After working inside your computer](#).

## Display assembly

### Removing the display assembly

 **CAUTION:** The information in this removal section is intended for authorized service technicians only.


 **CAUTION:** The maximum operating angle for the display-panel hinge is 135 degrees.

#### Prerequisites


1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [wireless card](#).

## About this task

The following images indicate the location of the display assembly and provide a visual representation of the removal procedure.

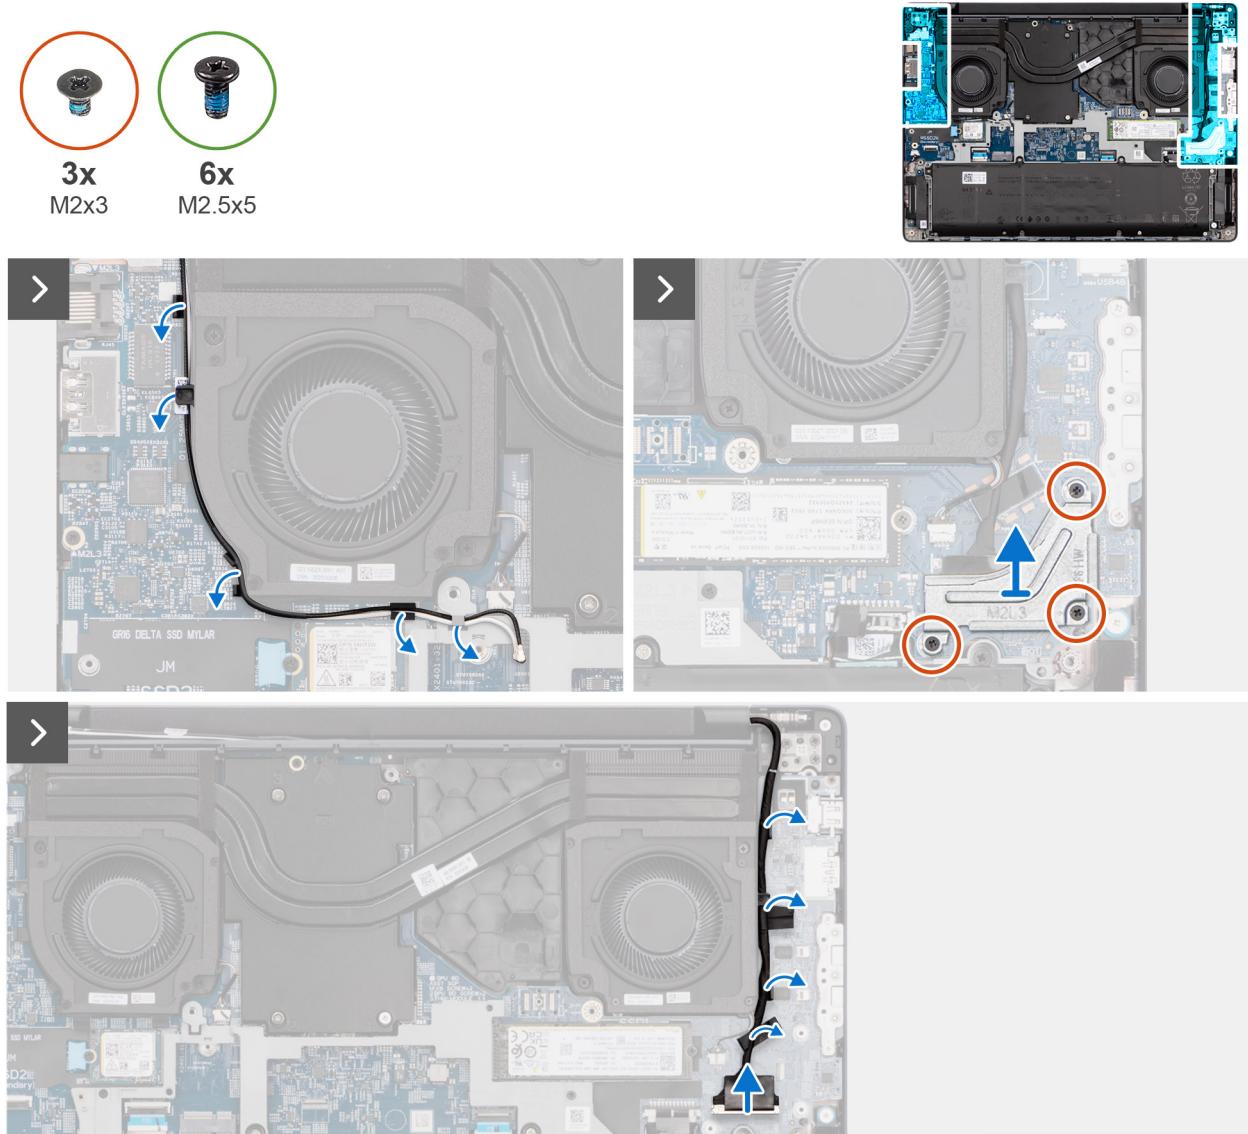

**Figure 44. Removing the display assembly**

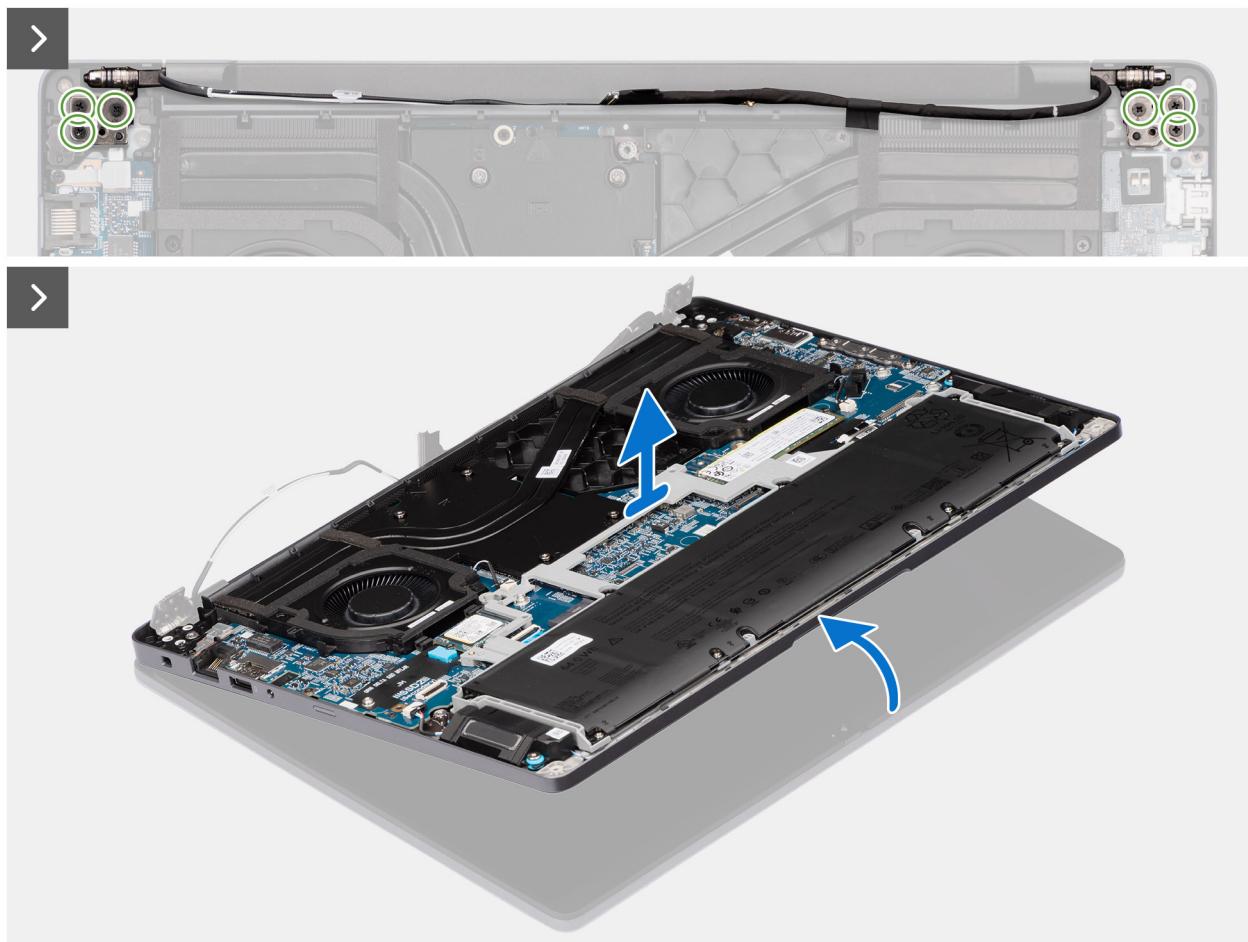

**Figure 45. Removing the display assembly**



**Figure 46. Display assembly**

### Steps

1. Remove the wireless-antenna cables from the routing guides on the right/processor fan.
2. Remove the three screws (M2x3) that secure the display-cable bracket to the system board.
3. Lift the display-cable bracket off the system board.
4. Disconnect the display cable from the connector (LCD1) on the system board.
5. Disconnect the IR-camera cable from the connector (CAM1) on the system board.

**i** **NOTE:** This step applies only to computers shipped with an IR camera installed.

6. Remove the display cable and the IR-camera cable, if available, from the routing guides on the left/video fan.
7. Remove the six screws (M2.5x5) that secure the display hinges to the palm-rest assembly.
8. Using a plastic scribe, lift the left and right hinges to an angle of 90 degrees from the palm-rest assembly.
9. Lift the palm-rest assembly at an angle to free it from the hinges and remove it from the display assembly.

**△ CAUTION:** To avoid damaging the display, do not slide the palm-rest assembly over the display assembly.

## Installing the display assembly

**△ CAUTION:** The information in this installation section is intended for authorized service technicians only.

**△ CAUTION:** The maximum operating angle for the display-panel hinge is 135 degrees.

### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.


## About this task

**NOTE:** Ensure that the display hinges are opened to the maximum before replacing the display assembly on the palm-rest assembly.


The following images indicate the location of the display assembly and provide a visual representation of the installation procedure.



**Figure 47. Installing the display assembly**

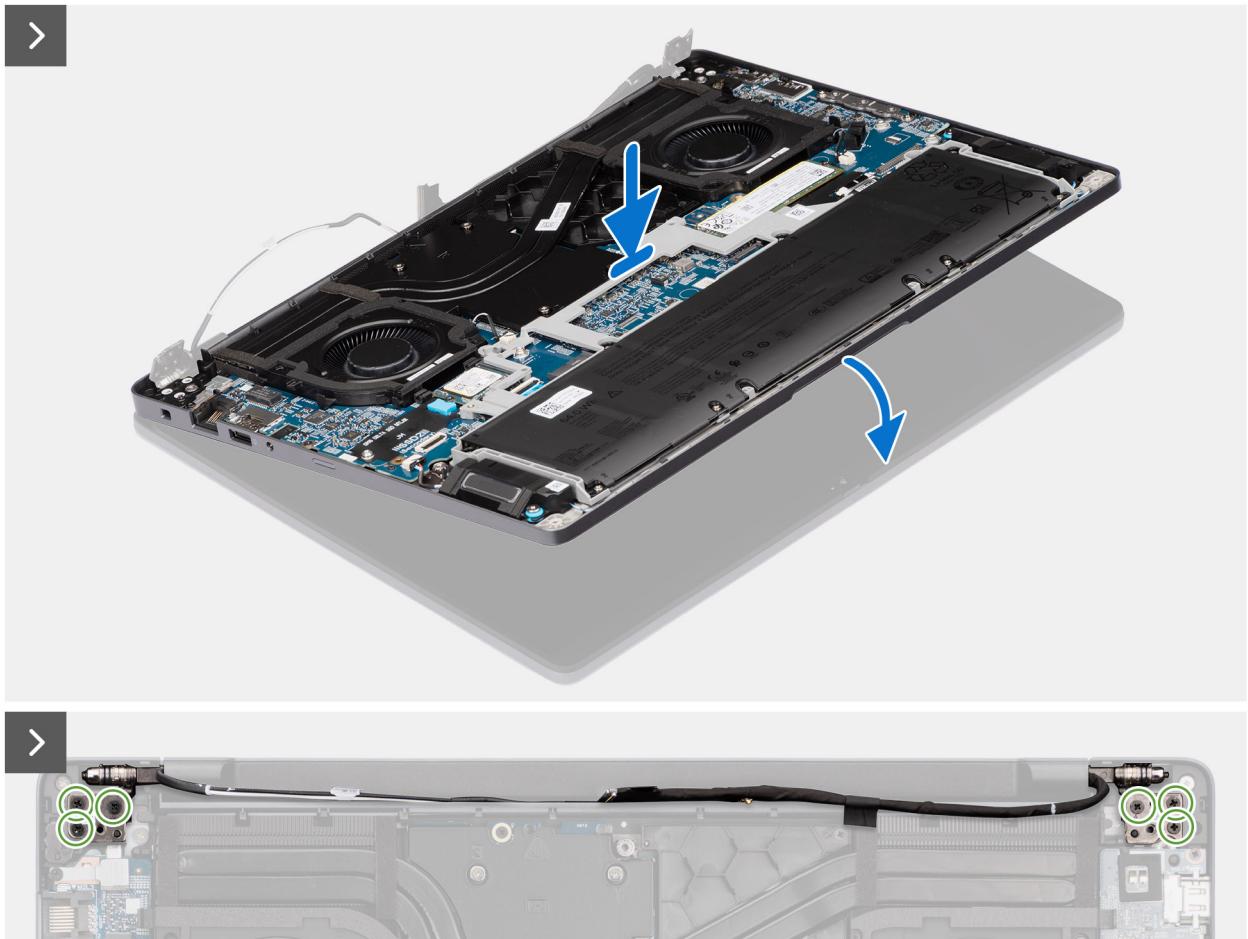

**Figure 48. Installing the display assembly**

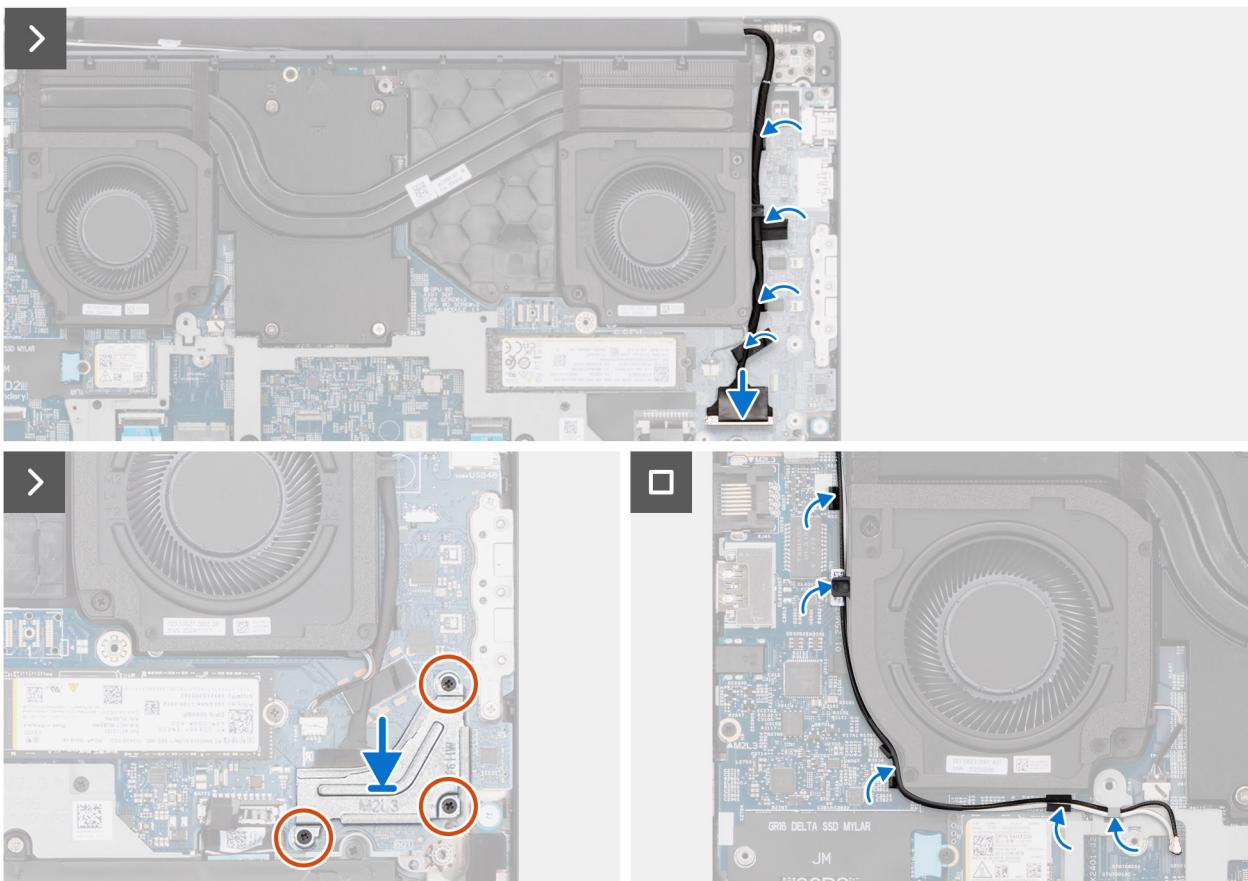

**Figure 49. Installing the display assembly**

### Steps

1. Place the display assembly on a clean and flat surface.
2. Hold the palm-rest assembly at an angle and slide the palm-rest assembly under the display hinges.

**⚠ CAUTION: To avoid damaging the display, do not slide the palm-rest assembly over the display assembly.**

3. Close the display hinges to align the screw holes on the display hinges with the screw holes on the palm-rest assembly.
4. Replace the six screws (M2.5x5) to secure the display hinges to the palm-rest assembly.
5. Route the display cable and the IR-camera cable, if available, through the routing guides on the left/video fan.
6. Connect the display cable to the connector (LCD1) on the system board.
7. Connect the IR-camera cable to the connector (CAM1) on the system board.

**ⓘ NOTE:** This step applies only to computers shipped with an IR camera installed.

8. Align and place the display-cable bracket over the display cable and the IR-camera cable, if available, on the system board.
9. Replace the three screws (M2x3) to secure the display-cable bracket to the system board.
10. Route the wireless-antenna cables through the routing guides on the right/processor fan.

### Next steps

1. Install the [wireless card](#).
2. Install the [base cover](#).
3. Follow the procedure in [After working inside your computer](#).

# Display bezel

## Removing the display bezel

 **CAUTION:** The information in this removal section is intended for authorized service technicians only.


### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [wireless card](#).
4. Remove the [display assembly](#).


### About this task

 **NOTE:** The display-hinge caps are a part of the display bezel.


The following image indicates the location of the display bezel and provides a visual representation of the removal procedure.

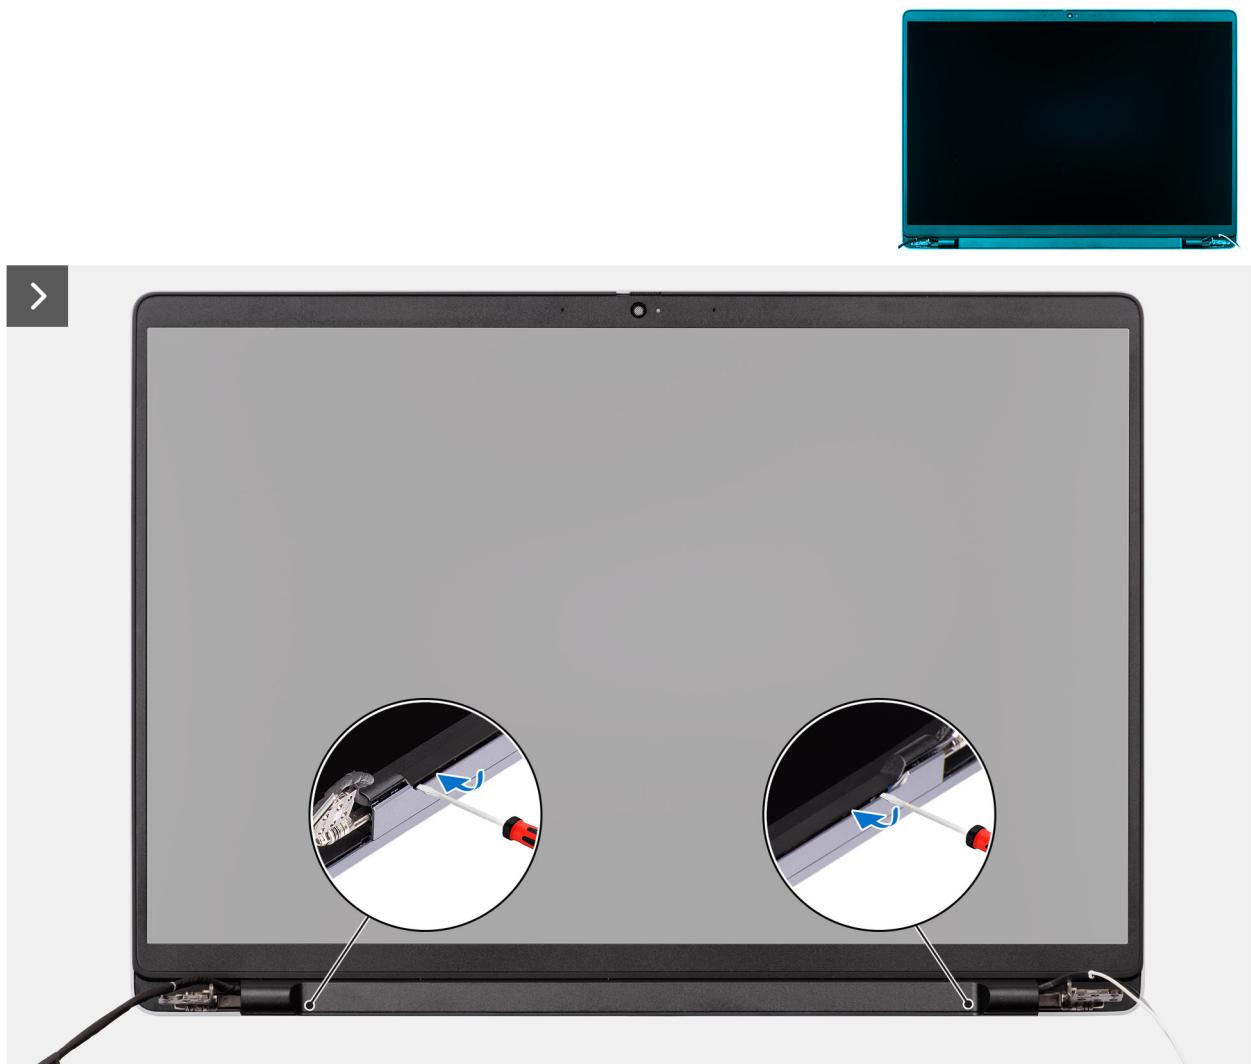


**Figure 50. Removing the display bezel**

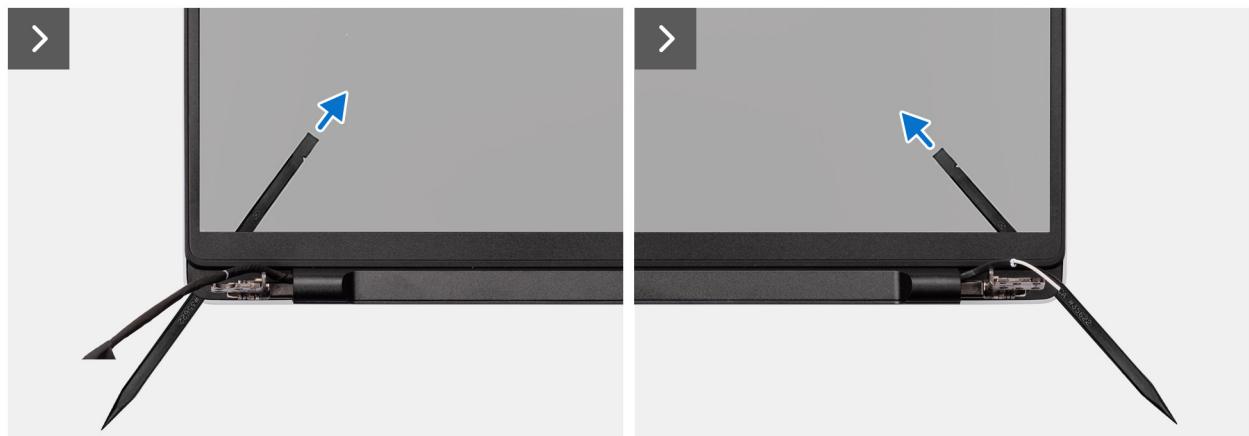

**Figure 51. Removing the display bezel**

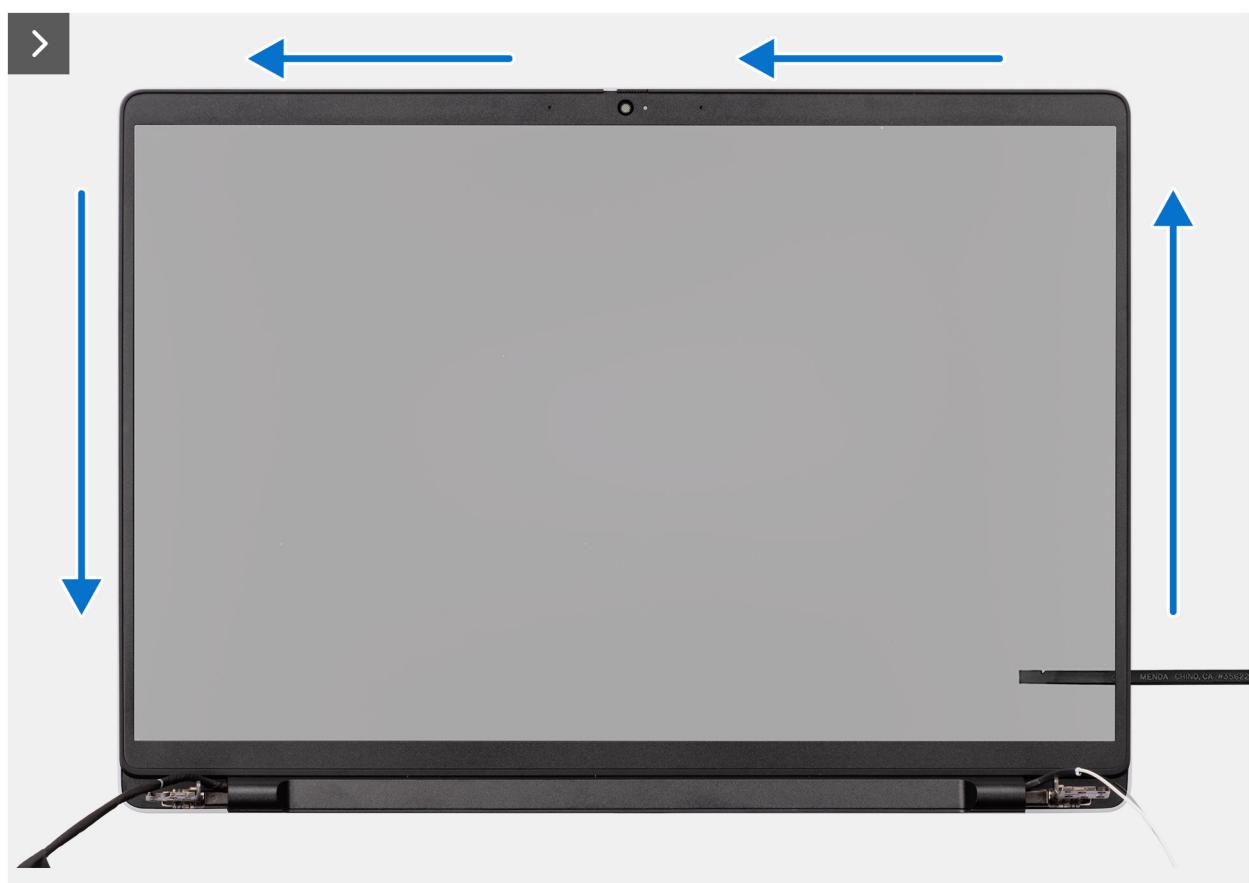


**Figure 52. Removing the display bezel**

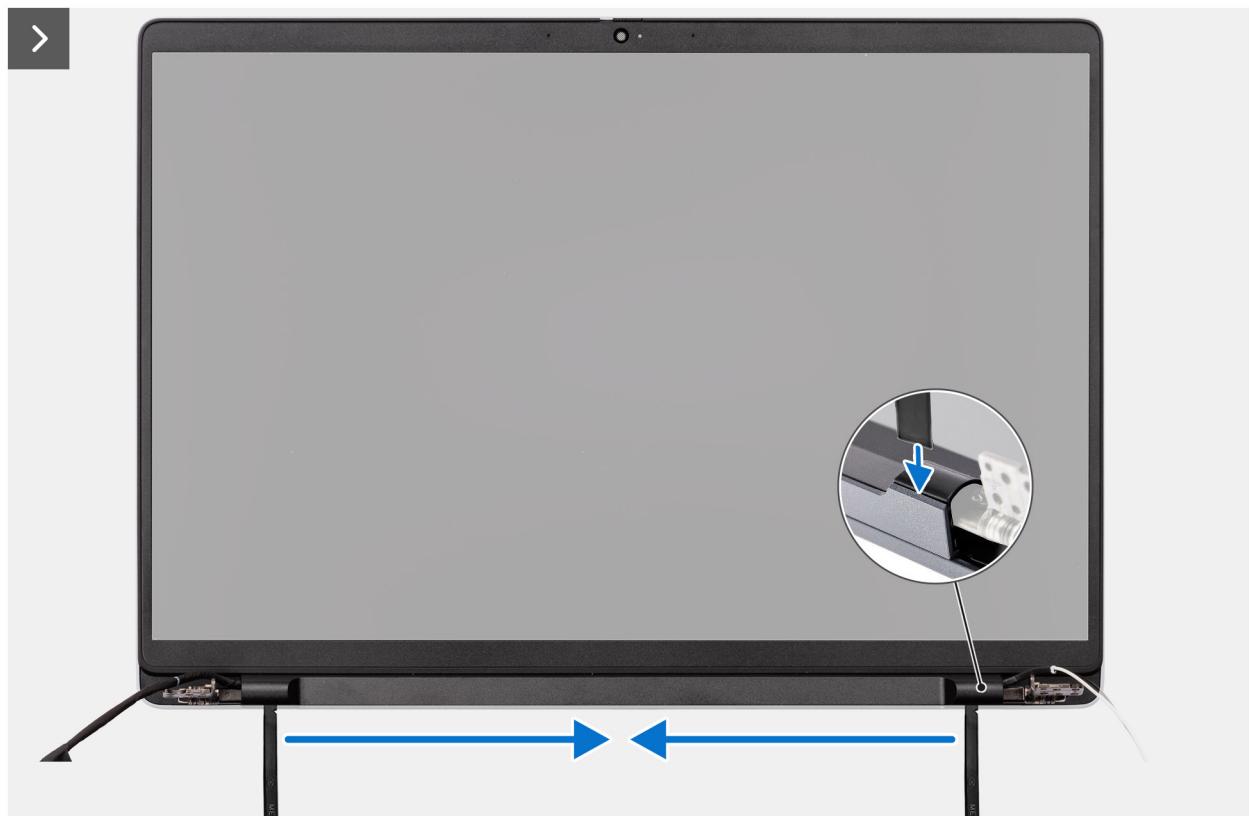

**Figure 53. Removing the display bezel**



**Figure 54. Removing the display bezel**

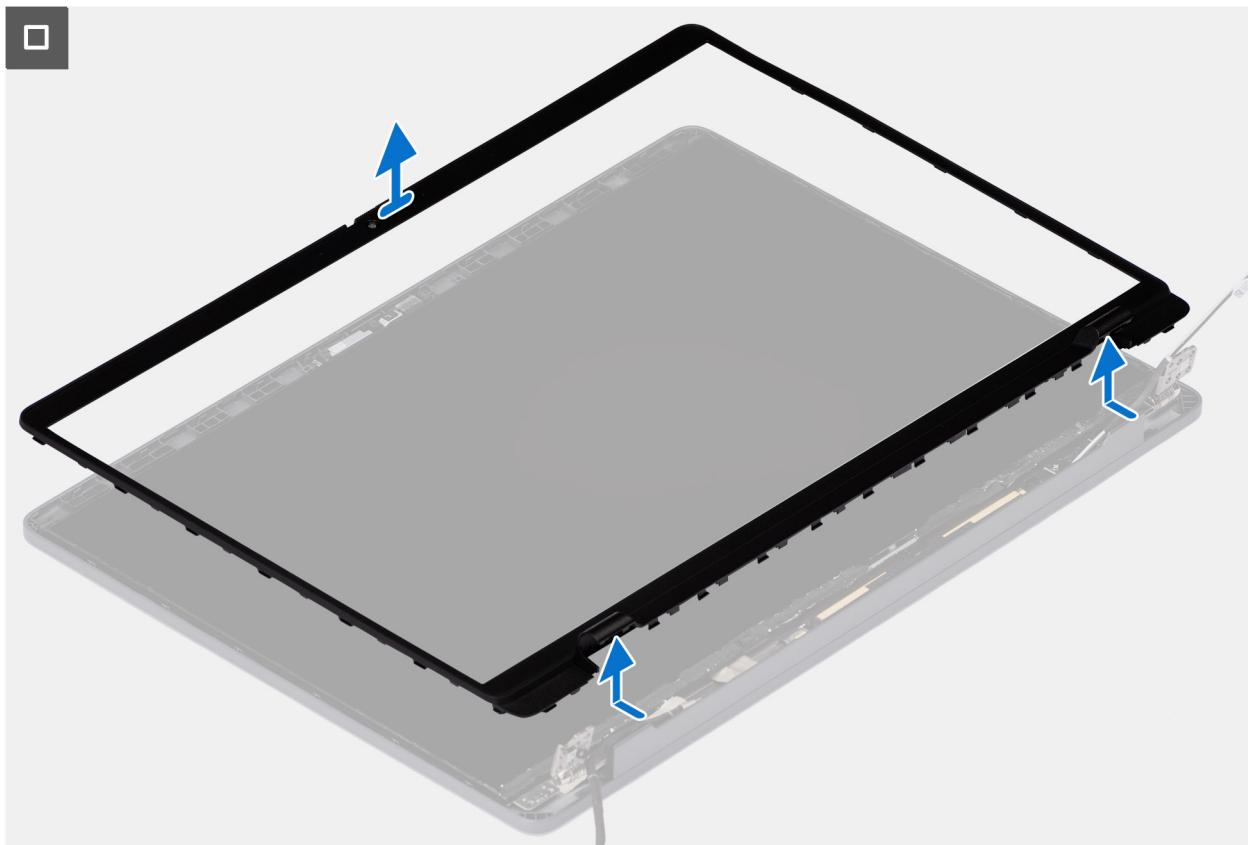

**Figure 55. Removing the display bezel**

### Steps

1. Place the display assembly on a clean, flat surface and gently open the display hinges to at least 90 degrees.
2. At an angle, insert a flat-head slotted screwdriver (maximum width: 4 mm) into the slots on the bottom edge of the display bezel, near the display hinges. Then gently pry open the display bezel at both ends, near the hinges.
- i NOTE:** The display bezel may get damaged during this step. If this happens, replace the display bezel with a new one.
- ⚠ CAUTION:** Do not use the flat-head slotted screwdriver to pry open the rest of the display bezel. Instead, use a plastic scribe to continue prying along the display bezel.
- ⚠ CAUTION:** When inserting the plastic scribe under the display bezel, ensure that it is parallel to the display panel. Pressing it down can damage the display panel.

Carefully insert a plastic scribe into the openings near the right display hinge, parallel to the display panel, to release the display bezel from the display.

4. Repeat step 4 near the left display hinge to release the display bezel from the display.
5. Keeping the plastic scribe parallel to the display panel, pry open the left, right, and top edges of the display bezel and carefully release it from the latches and adhesive on the display assembly.
6. Carefully insert the plastic scribe into the display-hinge cap at an angle of 90 degrees and pry open the display-hinge cap.
7. Keeping the plastic scribe at an angle of 90 degrees to the display panel, continue prying the bottom edge of the display bezel by sliding the scribe across the bottom edge and release it from the latches and adhesive on the display assembly.
8. Keeping the plastic scribe parallel to the right display hinge, insert the plastic scribe into the display bezel from the right edge. Then, carefully release the bezel, above the right display hinge, from the latches and adhesive on the display panel.
9. Repeat step 8 to release the display bezel above the left display hinge.
10. Lift the bezel to an angle of 15 degrees and gently pry along the middle part of the bottom edge and release the bezel from the latches and adhesive on the display panel.
11. Once all edges are released, carefully lift the display bezel off the display assembly.

# Installing the display bezel

**CAUTION:** The information in this installation section is intended for authorized service technicians only.

## Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

## About this task

**NOTE:** The display-hinge caps are a part of the display bezel.

The following images indicate the location of the display bezel and provide a visual representation of the installation procedure.


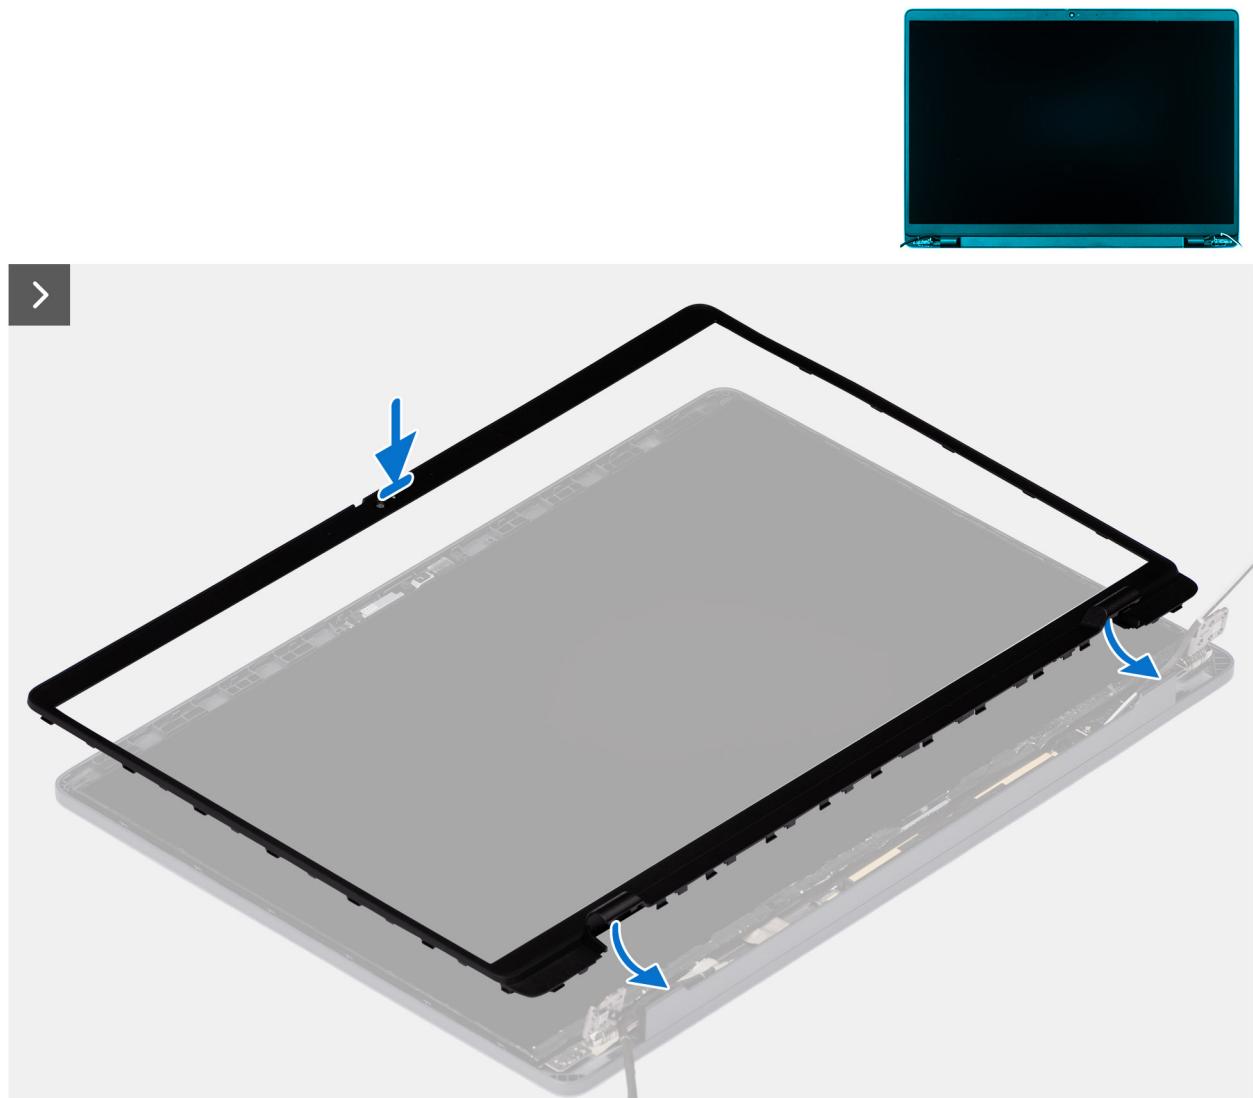


Figure 56. Installing the display bezel

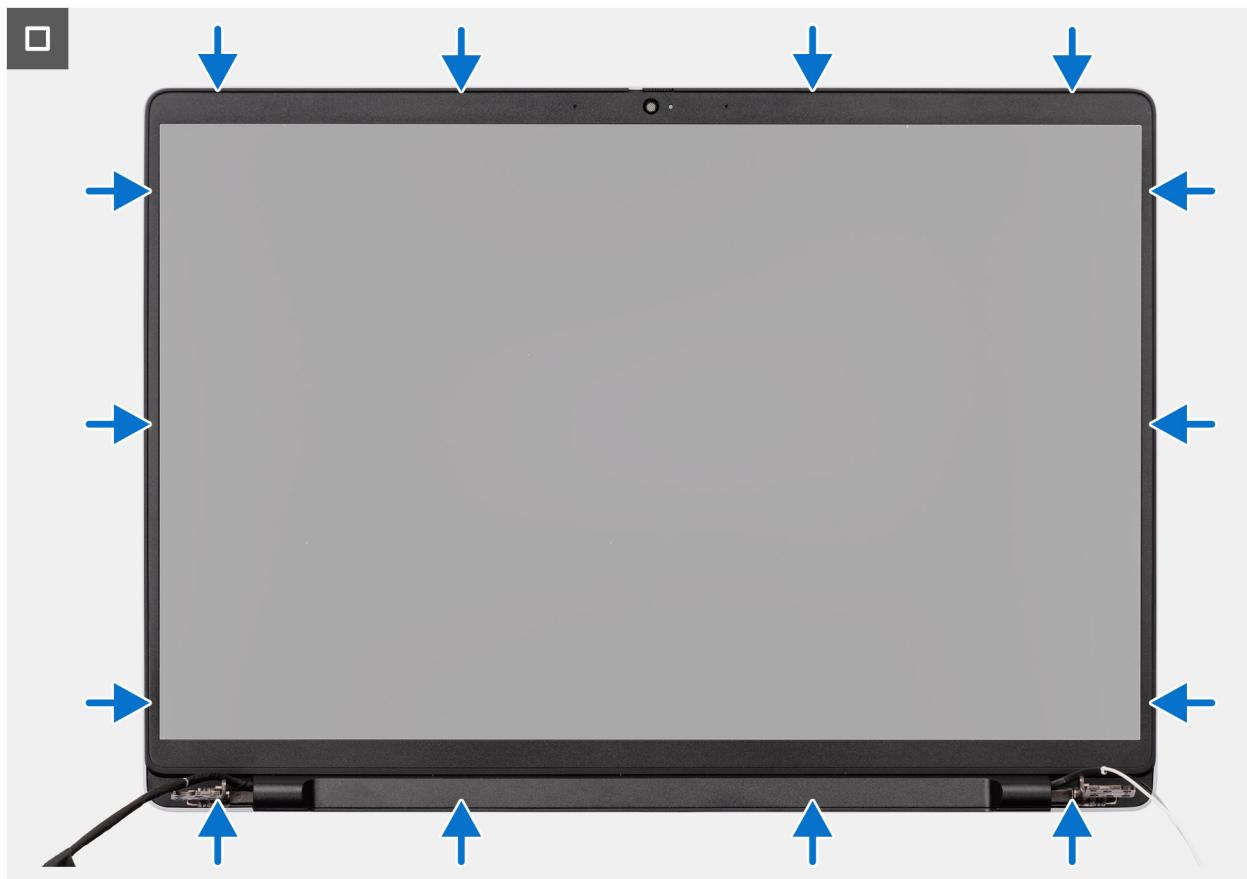

**Figure 57. Installing the display bezel**

#### Steps

1. Place the display assembly on a clean and flat surface.
2. Align and place the display bezel on the display assembly.
3. Route the display cable and wireless-antenna cables through the respective display-hinge caps.
4. Press the display-hinge caps down on the display hinges, until they click in place.
5. Starting from the bottom corner, press the display bezel and work around the entire bezel until it snaps onto the display assembly.

#### Next steps

1. Install the [display assembly](#).
2. Install the [wireless card](#).
3. Install the [base cover](#).
4. Follow the procedure in [After working inside your computer](#).

## Display panel

### Removing the display panel

 **CAUTION:** The information in this removal section is intended for authorized service technicians only.

#### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

3. Remove the [wireless card](#).
4. Remove the [display assembly](#).
5. Remove the [display bezel](#).


#### About this task

 **NOTE:** The display panel is assembled with the display-panel brackets as a single service part.


The following images indicate the location of the display panel and provide a visual representation of the removal procedure.



**Figure 58. Removing the display panel**

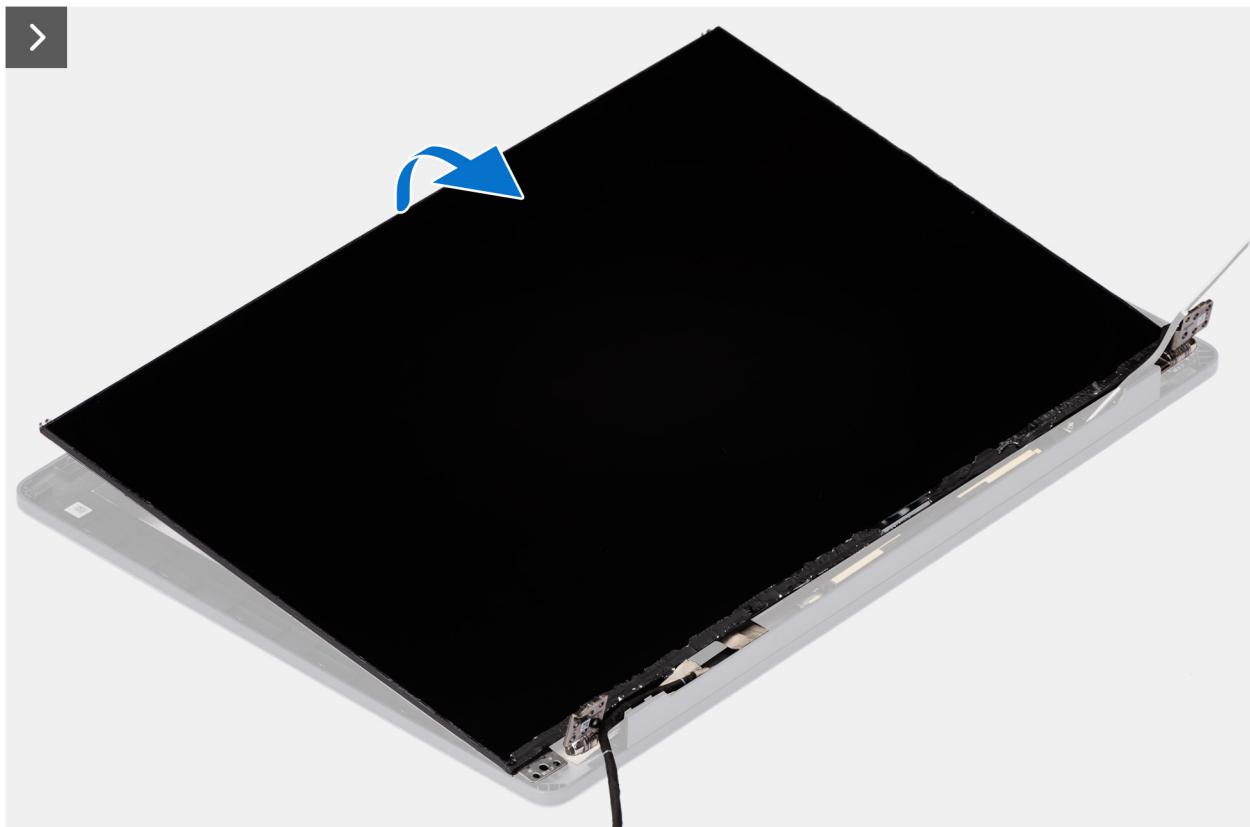

**Figure 59. Removing the display panel**

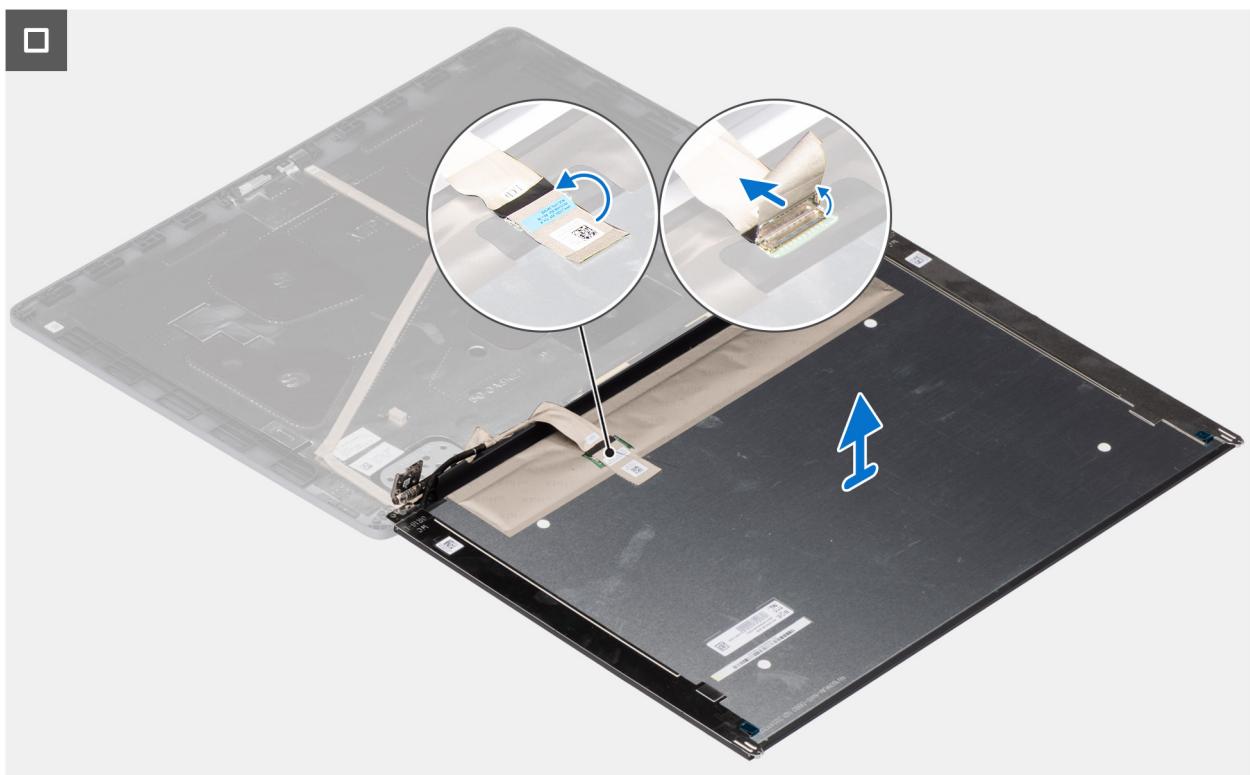

**Figure 60. Removing the display panel**

#### Steps

1. Remove the four screws (M2x3) that secure the display-panel brackets to the display back-cover and antenna assembly.

2. Holding the display-panel brackets at the top, gently flip the display panel assembly forward. Then, peel back the tape that secures the display cable to the connector on the rear of the display panel.

***(i) NOTE:*** To prevent damage, ensure that the display panel has a clean and smooth surface to rest on.

3. Disconnect the display cable from the connector on the display panel and remove the display panel.

***⚠ CAUTION:*** The display panel is assembled with the display-panel brackets as a single service part. Do not pull the two pieces of elastic tape and separate the brackets from the panel.



**Figure 61. Display panel**

## Installing the display panel

***⚠ CAUTION:*** The information in this installation section is intended for authorized service technicians only.

### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.


### About this task

***(i) NOTE:*** The display panel is assembled with the display-panel brackets as a single service part.


The following images indicate the location of the display panel and provide a visual representation of the installation procedure.



**4x**  
M2x3

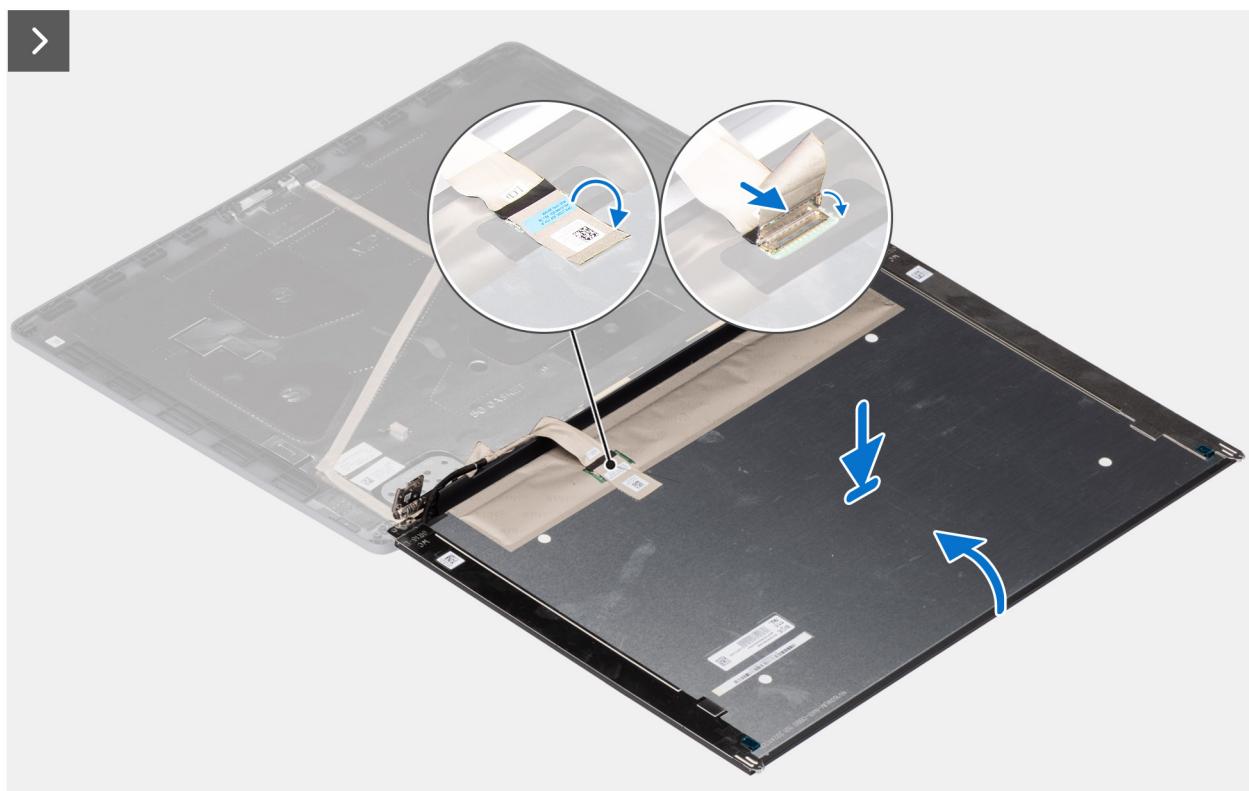

**Figure 62. Installing the display panel**

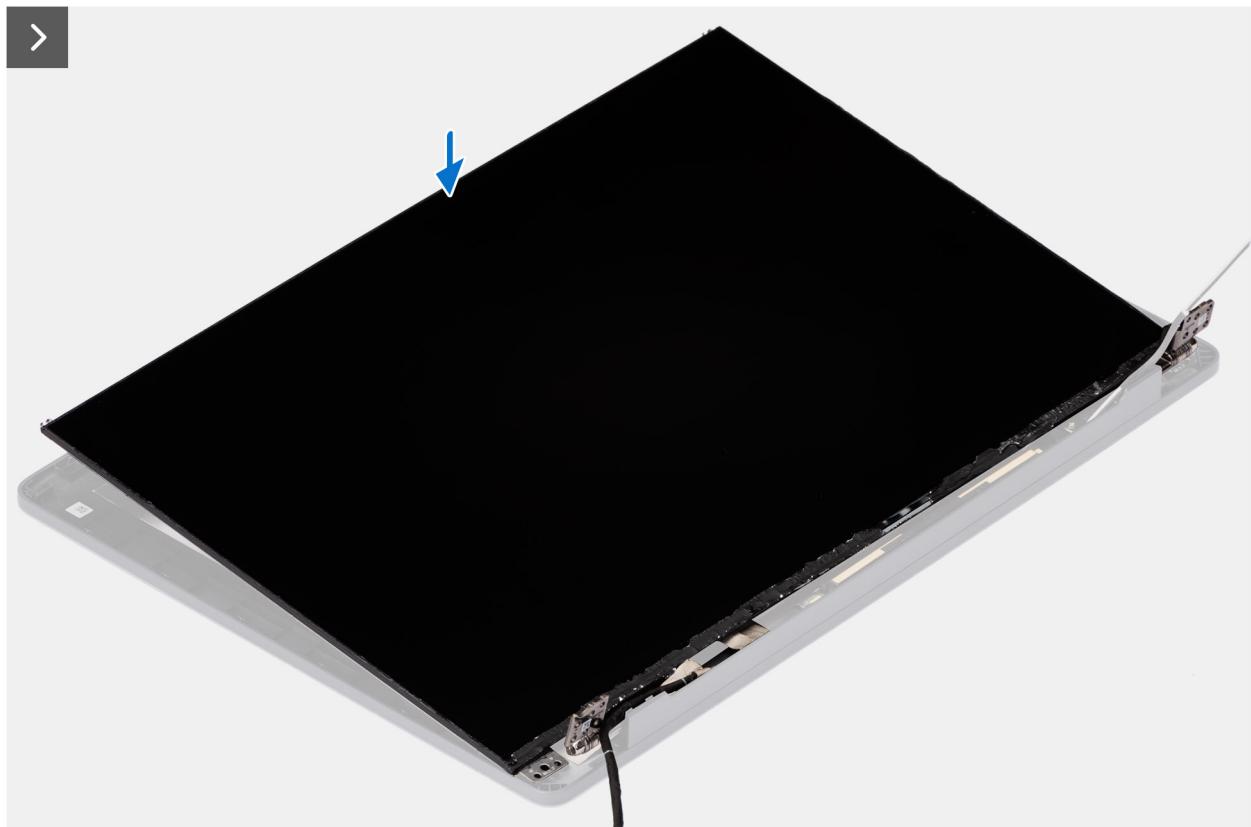

**Figure 63. Installing the display panel**



**Figure 64. Installing the display panel**

## Steps

1. Place the display panel and display assembly on a clean and flat surface.
2. Connect the display cable to the connector on the display panel.
3. Adhere the tape to secure the display cable to the connector on the display panel.
4. Gently turn the display panel over and place the display panel in the slot on the display back cover.
5. Replace the four screws (M2x3) to secure the display-panel brackets to the display back-cover and antenna assembly.

## Next steps

1. Install the [display bezel](#).
2. Install the [display assembly](#).
3. Install the [wireless card](#).
4. Install the [base cover](#).
5. Follow the procedure in [After working inside your computer](#).

# Display hinges

## Removing the display hinges

 **CAUTION:** The information in this removal section is intended for authorized service technicians only.

### Prerequisites



1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [wireless card](#).
4. Remove the [display assembly](#).
5. Remove the [display bezel](#).
6. Remove the [display panel](#).

### About this task

The following images indicate the location of the display hinges and provide a visual representation of the removal procedure.



**6x**  
M2.5x3.5

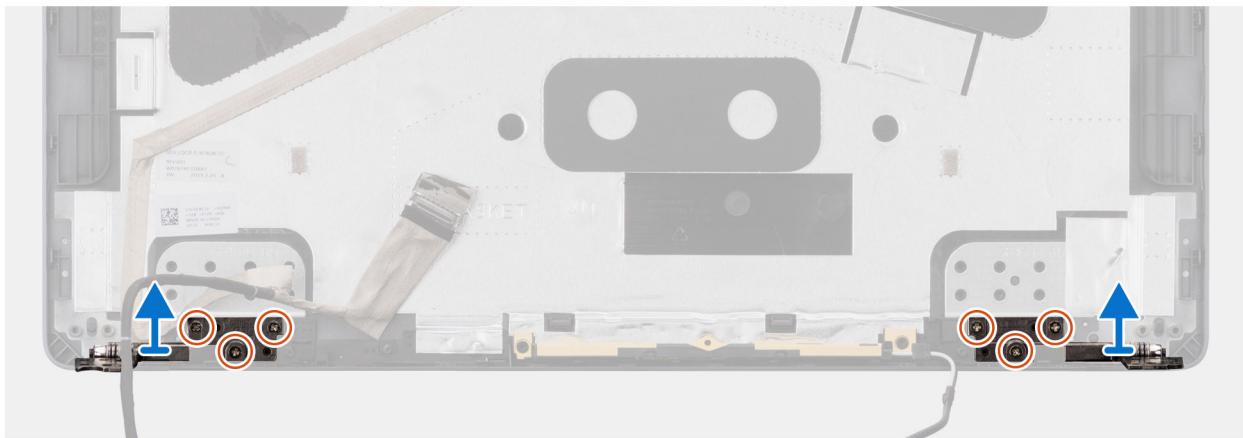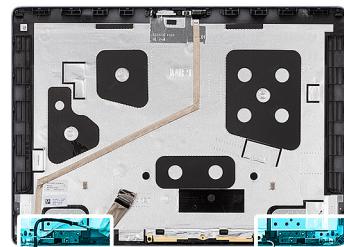

**Figure 65. Removing the display hinges**

### Steps

1. Gently peel back the display cable to access the left display hinge on the display back cover.
2. Gently peel back the tapes that secure the wireless-antenna cables to the display back cover.
3. Remove the three screws (M2.5x3.5) that secure the right display hinge to the display back cover.
4. Lift and remove the right display hinge from the display back-cover and antenna assembly.
5. Repeat steps 3 and 4 to remove the left display hinge from the display back-cover and antenna assembly.

## Installing the display hinges

**⚠ CAUTION:** The information in this installation section is intended for authorized service technicians only.

### Prerequisites



If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task

The following images indicate the location of the display hinges and provide a visual representation of the installation procedure.



**6x**  
M2.5x3.5

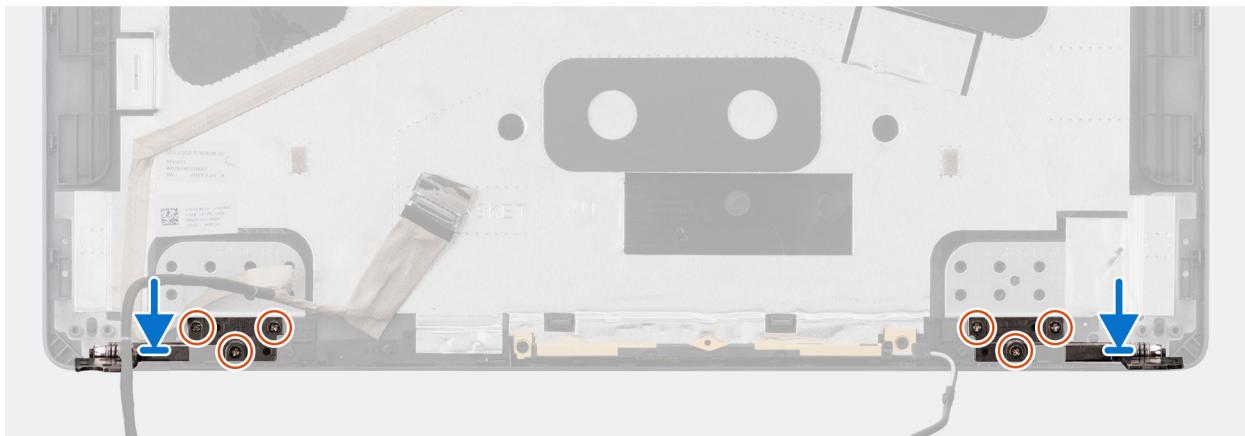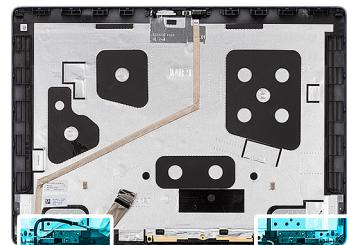

**Figure 66. Installing the display hinges**

#### Steps

1. Align and place the right display hinge on the display back-cover and antenna assembly.
2. Replace the three screws (M2.5x3.5) to secure the right display hinge to the display back cover.
3. Repeat steps 1 and 2 to secure the left display hinge to the display back cover.
4. Adhere the tapes to secure the wireless-antenna cables to the display back-cover and antenna assembly.
5. Adhere the display cable and secure it to the display back-cover and antenna assembly.

#### Next steps

1. Install the [display panel](#).
2. Install the [display bezel](#).
3. Install the [display assembly](#).
4. Install the [wireless card](#).
5. Install the [base cover](#).
6. Follow the procedure in [After working inside your computer](#).

## Display cable

### Removing the display cable


 **CAUTION:** The information in this removal section is intended for authorized service technicians only.

#### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [wireless card](#).
4. Remove the [display assembly](#).
5. Remove the [display bezel](#).
6. Remove the [display panel](#).

## About this task

The following image indicates the location of the display cable and provides a visual representation of the removal procedure.

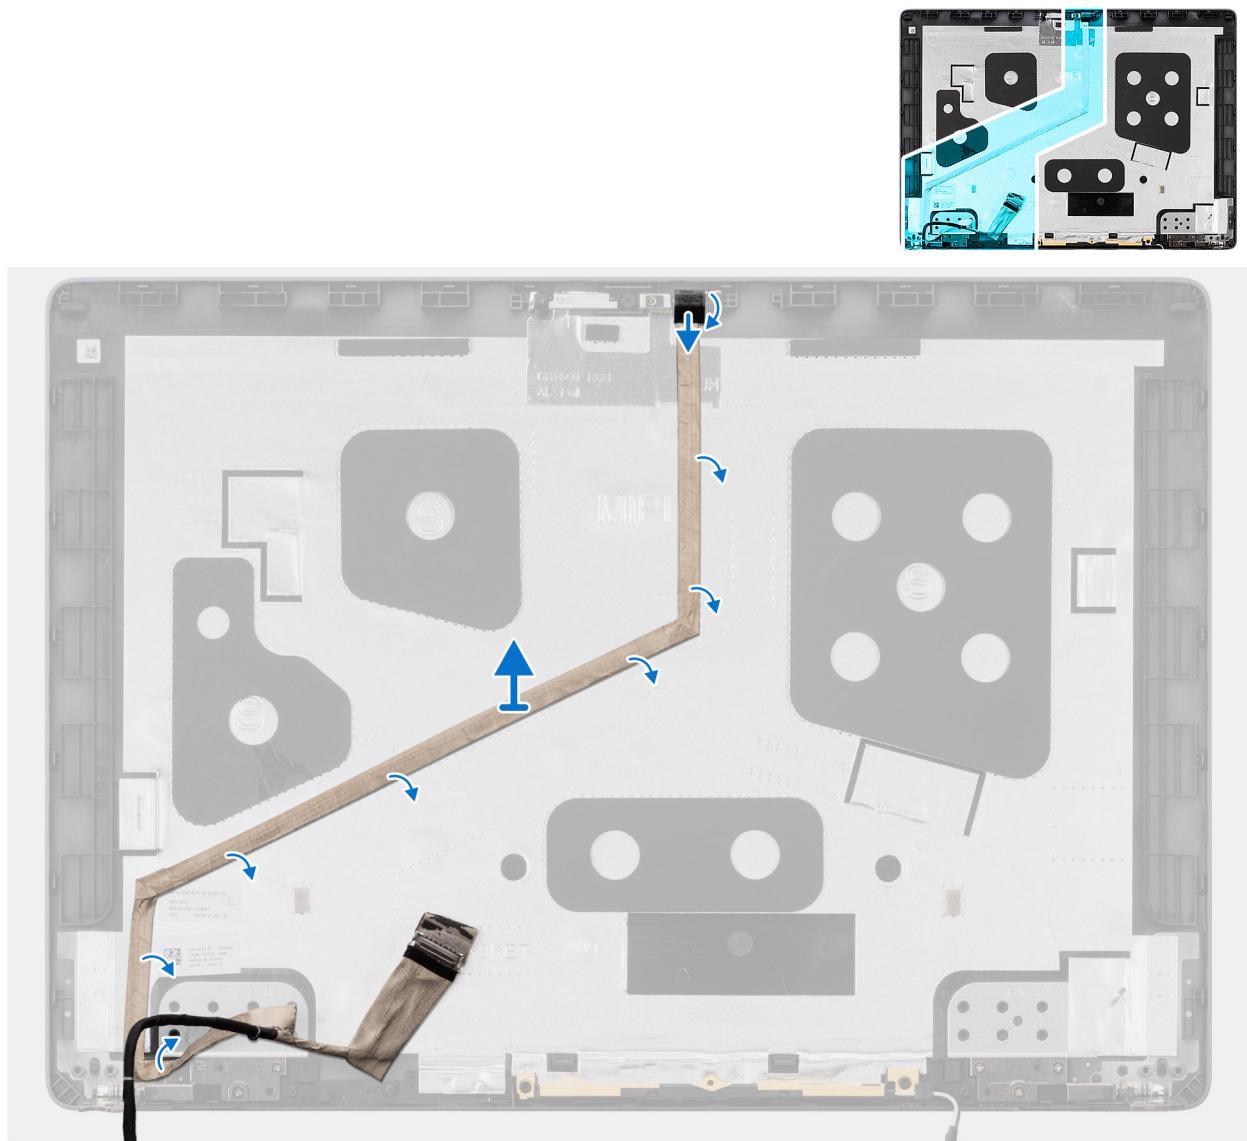

**Figure 67. Removing the display cable**

## Steps

1. Disconnect the display cable from the connector on the camera module.
2. Carefully peel back and remove the display cable from the display back-cover and antenna assembly.

## Installing the display cable


**CAUTION:** The information in this installation section is intended for authorized service technicians only.

## Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

## About this task

The following image indicates the location of the display cable and provides a visual representation of the installation procedure.

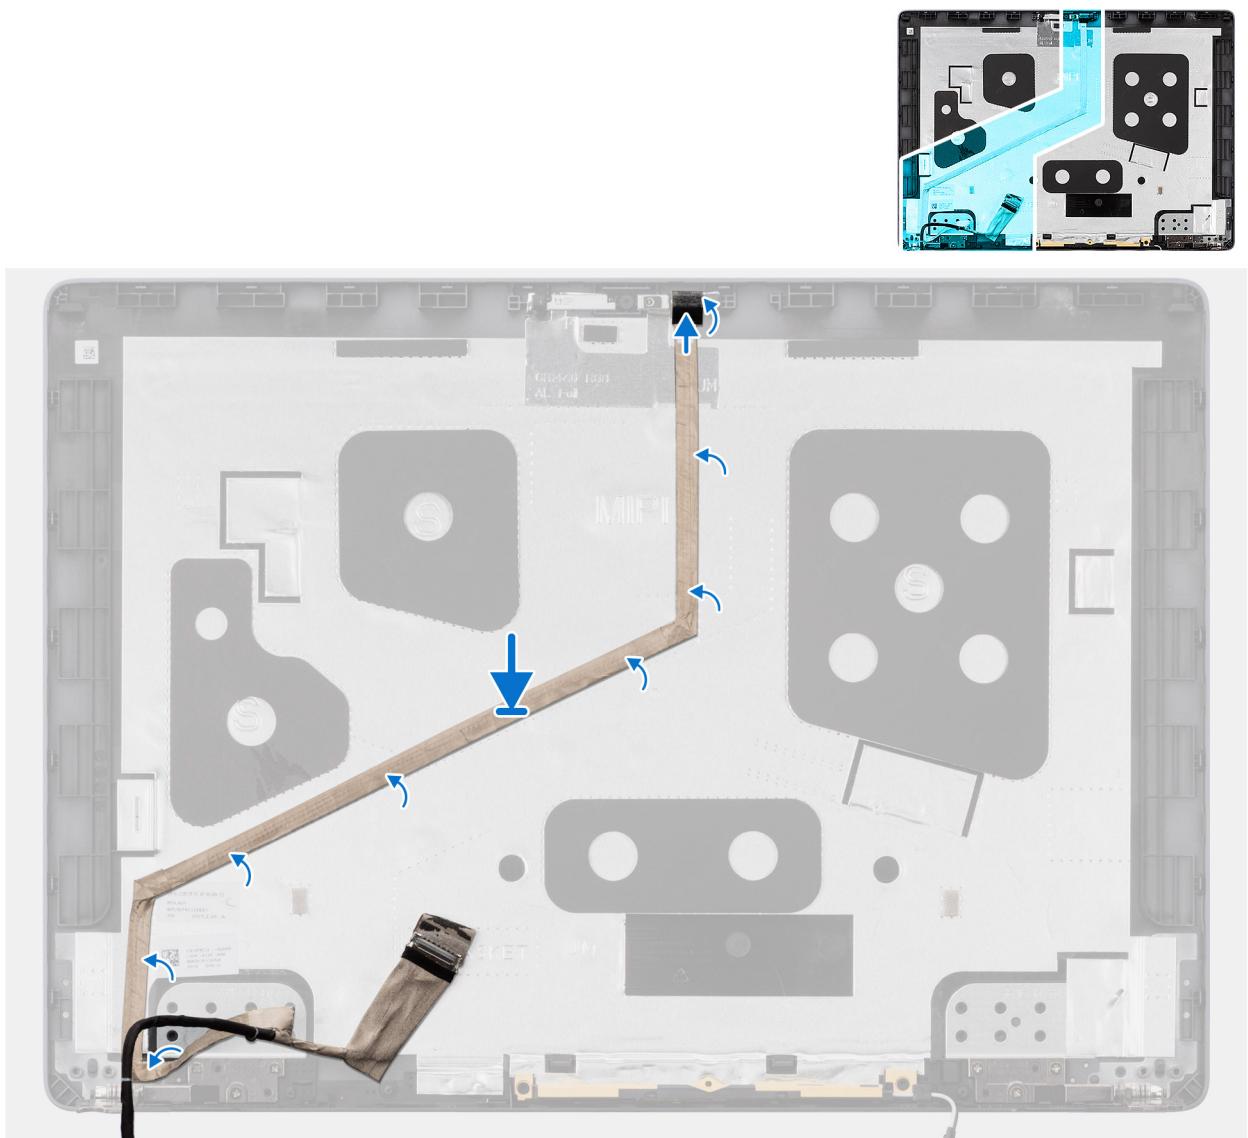

**Figure 68. Installing the display cable**

### Steps

1. Adhere the display cable to the display back-cover and antenna assembly.
2. Connect the display cable to the connector on the camera module.

### Next steps

1. Install the [display panel](#).
2. Install the [display bezel](#).
3. Install the [display assembly](#).
4. Install the [wireless card](#).
5. Install the [base cover](#).
6. Follow the procedure in [After working inside your computer](#).

# Camera

## Removing the camera

 **CAUTION:** The information in this removal section is intended for authorized service technicians only.


### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [wireless card](#).
4. Remove the [display assembly](#).
5. Remove the [display bezel](#).
6. Remove the [display panel](#).

### About this task

 **NOTE:** The camera module is removed with the foil as a single service part.

The following images indicate the location of the camera module and provide a visual representation of the removal procedure.

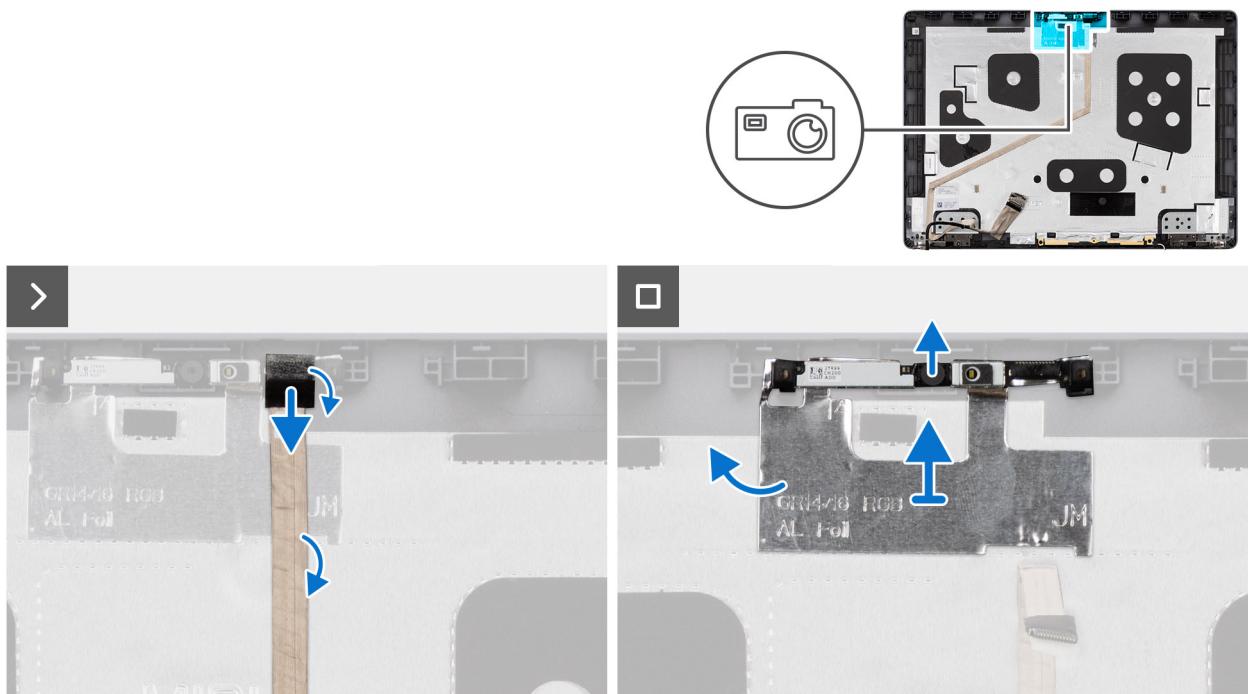

**Figure 69. Removing the camera**

### Steps

1. Disconnect the display cable from the connector on the camera module.
2. Gently peel back the copper or aluminum foil, whichever is applicable, from the display back-cover and antenna assembly.
3. Remove the camera module, along with the foil, from the display assembly.

## Installing the camera

 **CAUTION:** The information in this installation section is intended for authorized service technicians only.


## Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

## About this task

**NOTE:** The camera module is installed with the foil as a single service part.

The following images indicate the location of the camera module and provide a visual representation of the installation procedure.

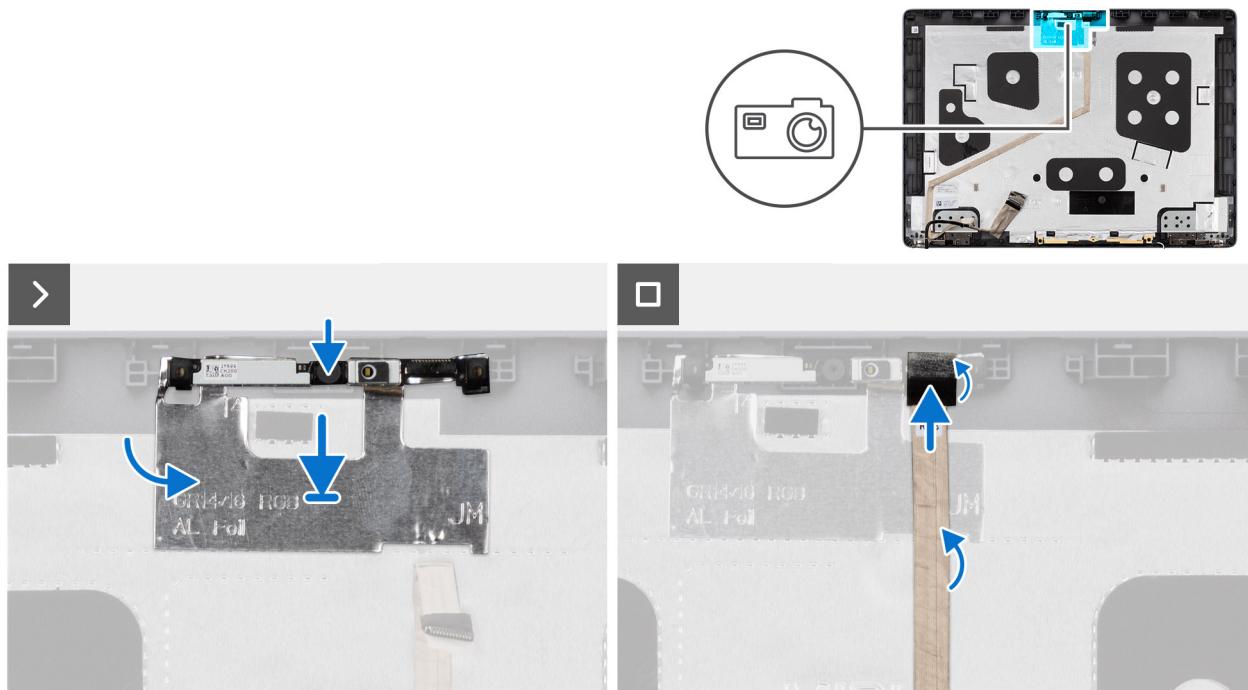

**Figure 70. Installing the camera**

## Steps

1. Align and place the camera module in the alignment post on the display back-cover and antenna assembly.
2. Adhere the copper or aluminum foil, whichever is applicable, to the display back-cover and antenna assembly.
3. Connect the display cable to the connector on the camera module.

## Next steps

1. Install the [display panel](#).
2. Install the [display bezel](#).
3. Install the [display assembly](#).
4. Install the [wireless card](#).
5. Install the [base cover](#).
6. Follow the procedure in [After working inside your computer](#).

# Display back-cover and antenna assembly

## Removing the display back-cover and antenna assembly

**CAUTION:** The information in this removal section is intended for authorized service technicians only.


## Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [wireless card](#).
4. Remove the [display assembly](#).
5. Remove the [display bezel](#).
6. Remove the [display panel](#).
7. Remove the [display hinges](#).
8. Remove the [display cable](#).
9. Remove the [camera](#).

## About this task

**NOTE:** The display back-cover and antenna assembly cannot be further disassembled once all the **Prerequisites** are completed. If the wireless antennas are malfunctioning and are required to be replaced, replace the entire display back-cover and antenna assembly.

The image below shows the display back-cover and antenna assembly after the **Prerequisites** have been performed.

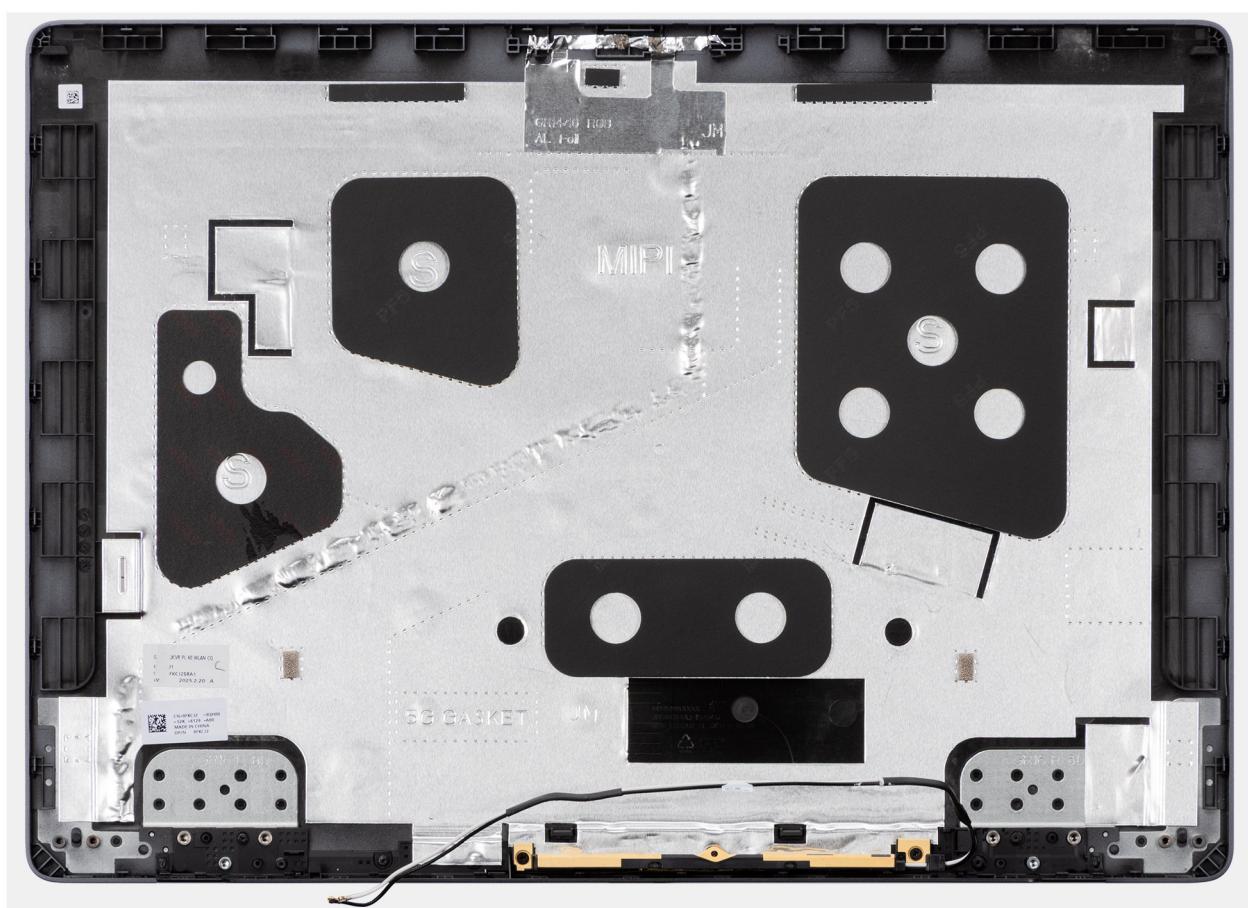

**Figure 71. Display back-cover and antenna assembly**

## Steps

After performing the **Prerequisites**, you are left with the display back-cover and antenna assembly.

## Installing the display back-cover and antenna assembly


**CAUTION:** The information in this installation section is intended for authorized service technicians only.

## Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

## About this task

The image below shows the display back-cover and antenna assembly.

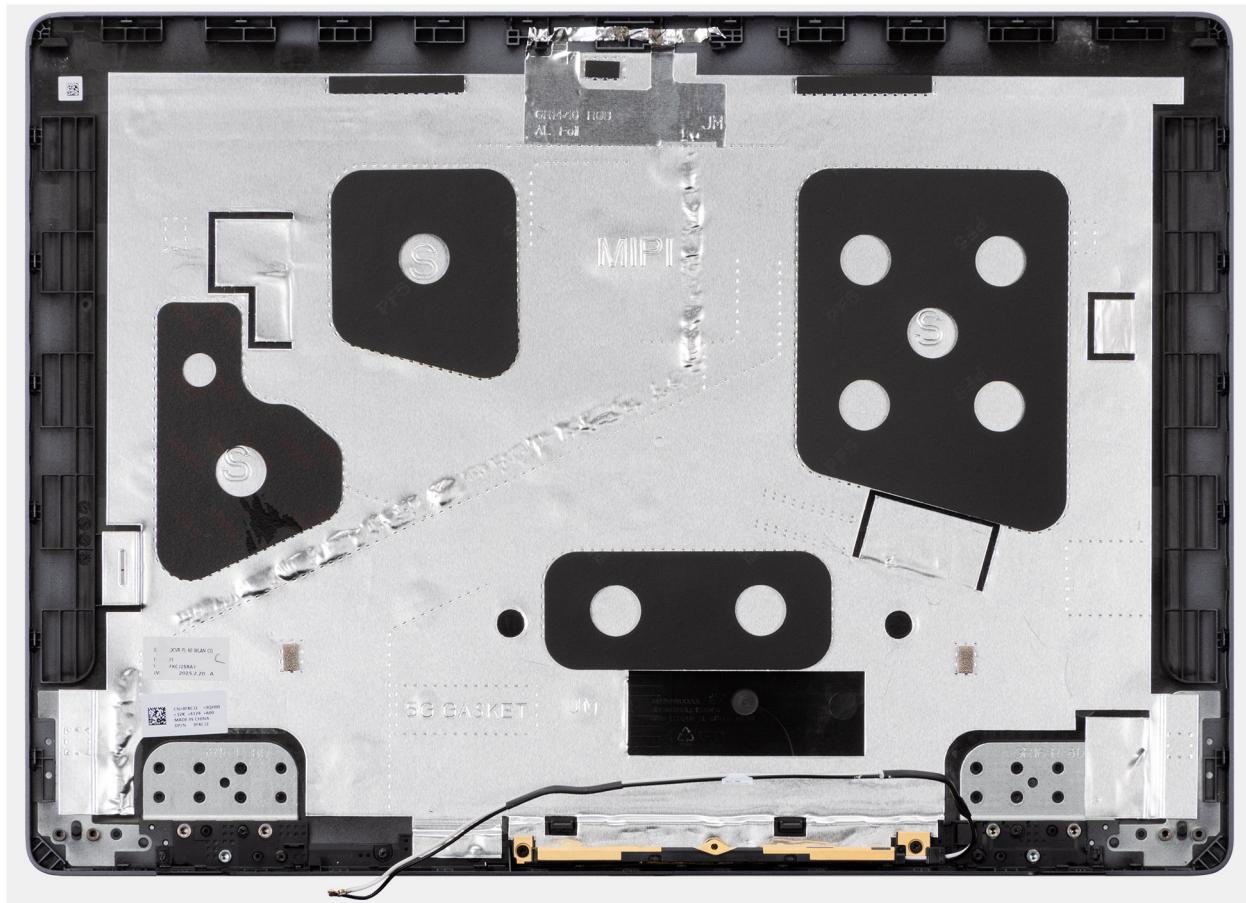

**Figure 72. Display back-cover and antenna assembly**

## Steps

Place the display back-cover and antenna assembly on a flat surface and perform the **Next steps** to install the display back-cover and antenna assembly.

## Next steps

1. Install the [camera](#).
2. Install the [display cable](#).
3. Install the [display hinges](#).
4. Install the [display panel](#).
5. Install the [display bezel](#).
6. Install the [display assembly](#).
7. Install the [wireless card](#).
8. Install the [base cover](#).
9. Follow the procedure in [After working inside your computer](#).

# System board

## Removing the system board

**CAUTION:** The information in this removal section is intended for authorized service technicians only.

### Prerequisites


1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [battery](#).
4. Remove the [M.2 2230 solid state drive](#) or [M.2 2280 solid state drive](#), whichever is applicable.
5. Remove the [wireless card](#).
6. Remove the [right/processor fan](#).
7. Remove the [left/video fan](#).
8. Remove the [heat sink](#).

**NOTE:** If you are removing the system board to replace/access other parts, you may remove the system board with the heat sink attached to it in order to simplify the procedure and preserve the thermal bond between the system board and heat sink.

9. Remove the [battery frame](#).

### About this task

The following image indicates the connectors on your system board.

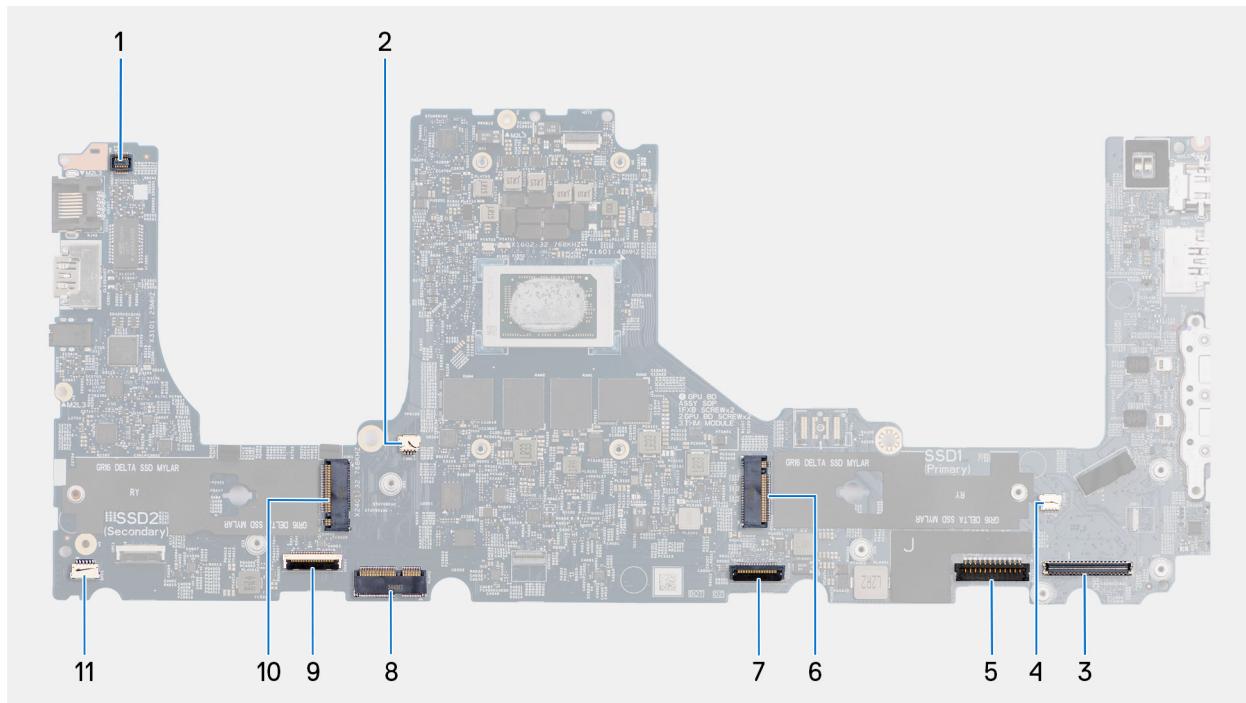


**Figure 73. System board connectors**

1. Fingerprint-reader cable connector (FP1)
2. Right/Processor-fan cable connector (FANL1)
3. Display-cable connector (LCD1)
4. Left/Video-fan cable connector (FANR2)
5. Battery-cable connector (BATT1)
6. Primary M.2 solid state drive connector (SSD2)

7. IR-camera cable connector (CAM1)
8. Touchpad-cable connector (TPAD1)
9. Wireless-card connector (WLAN1)
10. Secondary M.2 solid state drive connector (SSD1)
11. USH-board cable connector (CN661)
12. Speaker-cable connector (SPK1)

The following images indicate the location of the system board and provide a visual representation of the removal procedure.

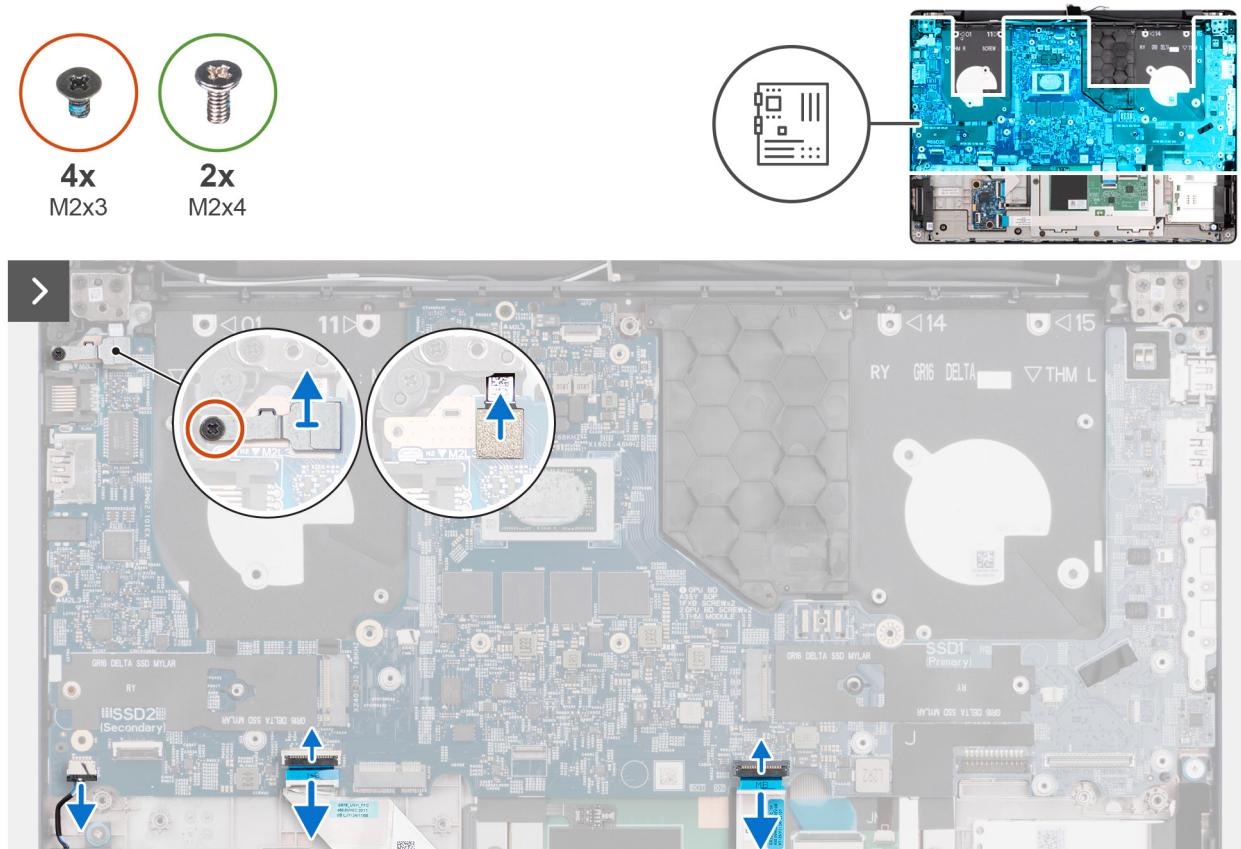

**Figure 74. Removing the system board**


## Steps

1. Remove the reusable Mylar sheet with thermal pads from the system board and transfer it to the new replacement system board.
2. Remove the screw (M2x3) that secures the fingerprint-reader bracket to the palm-rest assembly.

**i** **NOTE:** Steps 1 to 3 apply only to computers shipped with a fingerprint reader installed.

3. Lift the fingerprint-reader bracket off the system board.
4. Disconnect the fingerprint-reader cable from the connector (FP1) on the system board.
5. Disconnect the following cables from the system board:
  - a. Speaker cable (SPK1)
  - b. Touchpad cable (TPAD1)
  - c. USH-board cable (CN661)
6. For computers shipped without a fingerprint reader, remove the four screws (M2x3) and the two screws (M2x4) that secure the system board to the palm-rest assembly.

For computers shipped with a fingerprint reader, remove the three screws (M2x3) and the two screws (M2x4) that secure the system board to the palm-rest assembly.

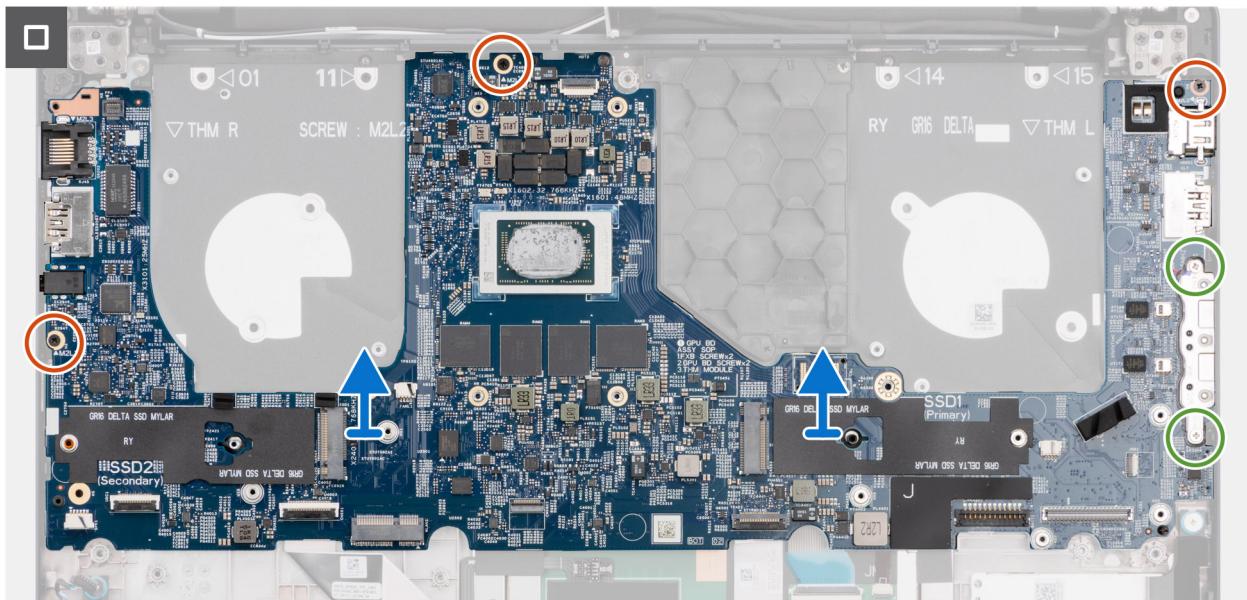

**Figure 75. Removing the system board**

7. Carefully lift and remove the system board at angle, from the palm-rest assembly, to clear the ports from the port slots.

## Installing the system board


**CAUTION:** The information in this installation section is intended for authorized service technicians only.

### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task


The following image indicates the connectors on your system board.

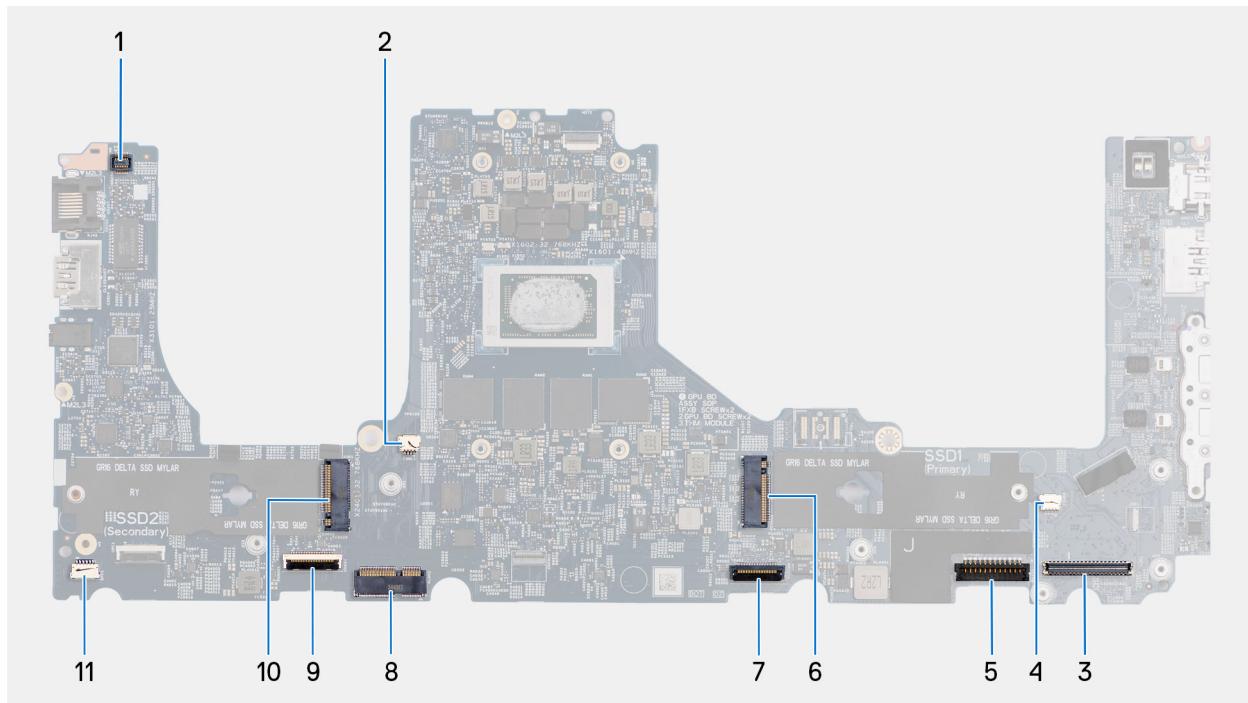

**Figure 76. System board connectors**

1. Fingerprint-reader cable connector (FP1)
2. Right/Processor-fan cable connector (FANL1)
3. Display-cable connector (LCD1)
4. Left/Video-fan cable connector (FANR2)
5. Battery-cable connector (BATT1)
6. Primary M.2 solid state drive connector (SSD2)
7. IR-camera cable connector (CAM1)
8. Touchpad-cable connector (TPAD1)
9. Wireless-card connector (WLAN1)
10. Secondary M.2 solid state drive connector (SSD1)
11. USH-board cable connector (CN661)
12. Speaker-cable connector (SPK1)


The following images indicate the location of the system board and provide a visual representation of the installation procedure.

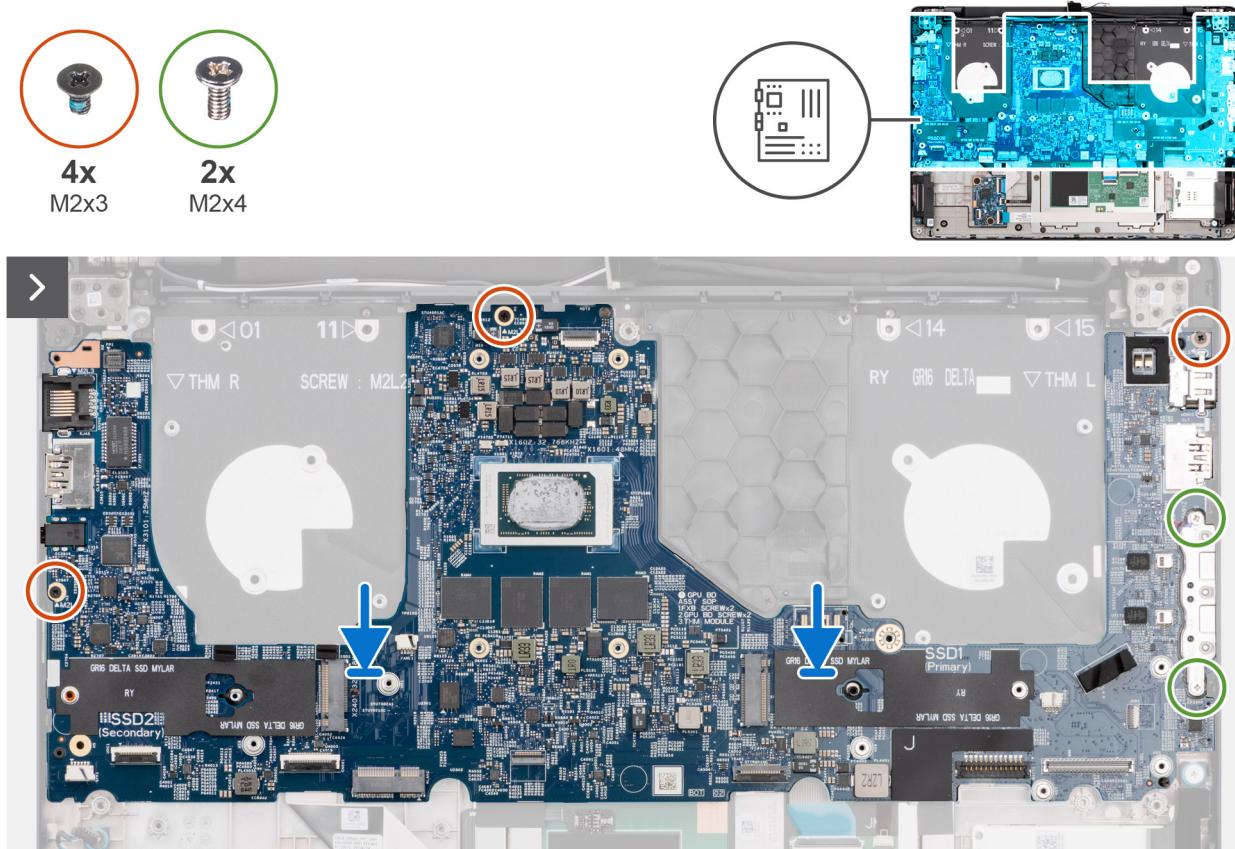

**Figure 77. Installing the system board**

## Steps

1. Align the ports on the system board to the port slots and place the system board on the palm-rest assembly.
2. Align the screw holes on the system board with the screw holes on the palm-rest assembly.
3. For computers shipped with a fingerprint reader, replace the three screws (M2x3) and the two screws (M2x4) to secure the system board to the palm-rest assembly.  
For computers shipped without a fingerprint reader, replace the four screws (M2x3) and the two screws (M2x4) to secure the system board to the palm-rest assembly.
4. Connect the following cables to the system board:
  - a. Speaker cable (SPK1)
  - b. Touchpad cable (TPAD1)
  - c. USH-board cable (CN661)

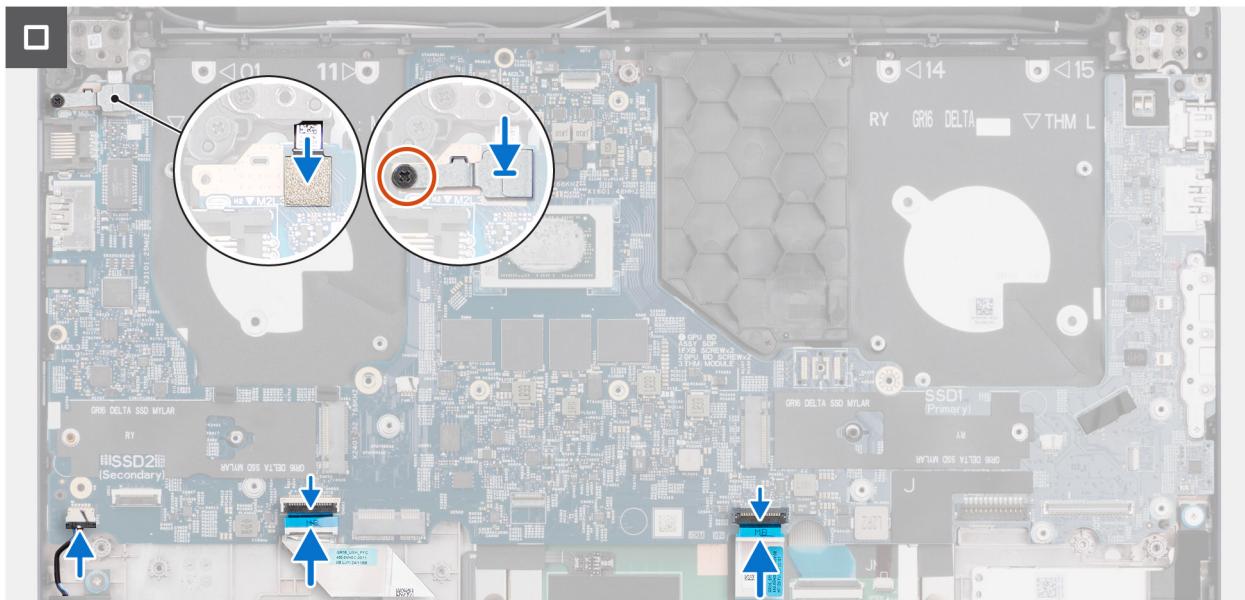

**Figure 78. Installing the system board**

5. Connect the fingerprint-reader cable to the connector (FP1) on the system board.

**NOTE:** Steps 6 to 8 apply only to computers shipped with a fingerprint reader installed.

6. Align and place the fingerprint-reader bracket over the fingerprint-reader connector on the system board.

7. Replace the screw (M2x3) to secure the fingerprint-reader bracket to the palm-rest assembly.

8. Ensure that the reusable Mylar sheet with thermal pads is placed on the system board.

**NOTE:** When replacing the system board, this Mylar sheet should be transferred to the new replacement system board.

#### Next steps

1. Install the [battery frame](#).
2. Install the [heat sink](#).
3. Install the [left/video fan](#).
4. Install the [right/processor fan](#).
5. Install the [wireless card](#).
6. Install the [M.2 2230 solid state drive](#) or [M.2 2280 solid state drive](#), whichever is applicable.
7. Install the [battery](#).
8. Install the [base cover](#).
9. Follow the procedure in [After working inside your computer](#).

## USB Type-C module

### Removing the USB Type-C module

**CAUTION:** The information in this removal section is intended for authorized service technicians only.

#### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [battery](#).
4. Remove the [M.2 2230 solid state drive](#) or [M.2 2280 solid state drive](#), whichever is applicable.

5. Remove the [wireless card](#).
6. Remove the [right/processor fan](#).
7. Remove the [left/video fan](#).
8. Remove the [heat sink](#).


**i NOTE:** If you are removing the system board to replace/access other parts, you may remove the system board with the heat sink attached to it in order to simplify the procedure and preserve the thermal bond between the system board and heat sink.

9. Remove the [battery frame](#).
10. Remove the [system board](#).

**i NOTE:** If you are removing the system board to replace/access other parts, you may remove the system board with the heat sink attached to it in order to simplify the procedure and preserve the thermal bond between the system board and heat sink.

#### About this task

The following image indicates the location of the USB Type-C module and provides a visual representation of the removal procedure.

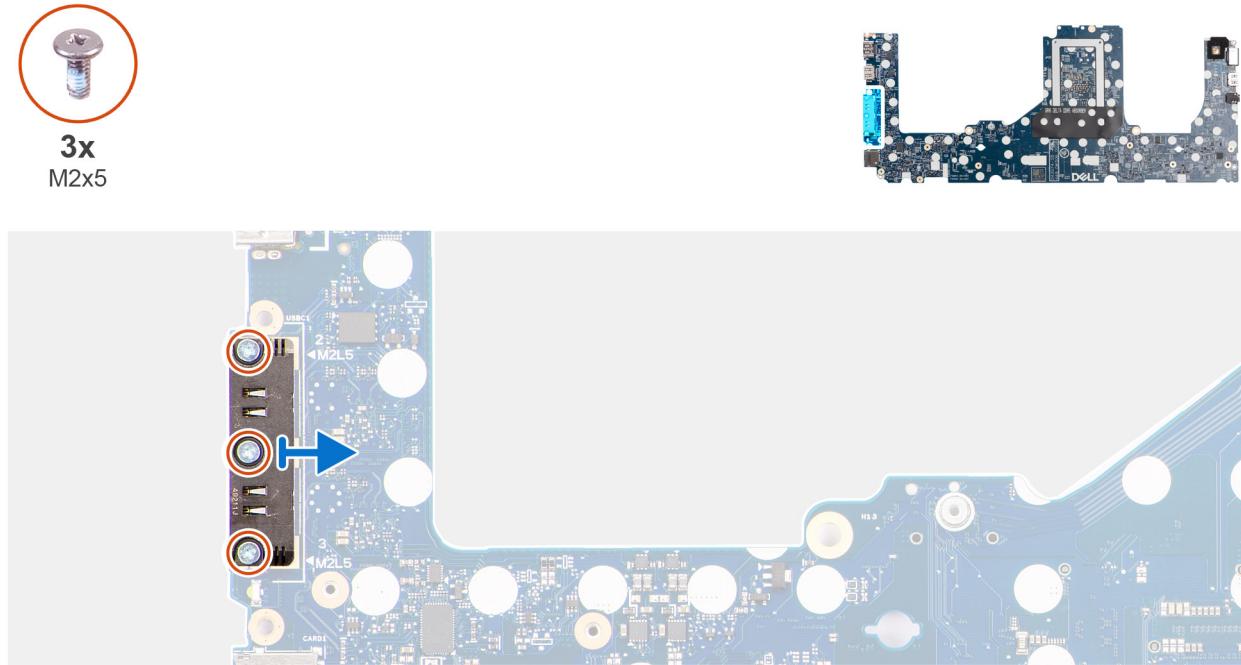

**Figure 79. Removing the USB Type-C module**

#### Steps

1. Remove the three screws (M2x5) that secure the USB Type-C module to the system board.
2. Lift the USB Type-C module off the system board.

## Installing the USB Type-C module


**Δ CAUTION:** The information in this installation section is intended for authorized service technicians only.

#### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

## About this task

The following image indicates the location of the USB Type-C module and provides a visual representation of the installation procedure.

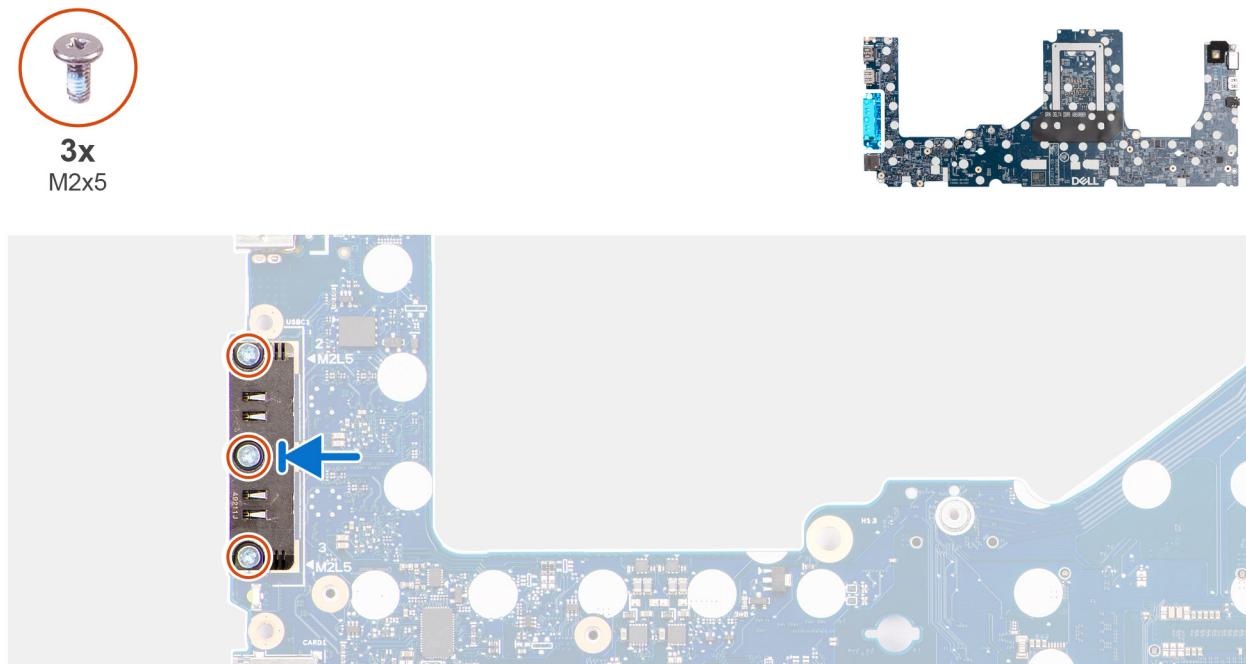

**Figure 80. Installing the USB Type-C module**

## Steps

1. Align and place the USB Type-C module over the USB Type-C ports on the system board.
2. Replace the three screws (M2x5) to secure the USB Type-C module to the system board.

## Next steps

1. Install the [system board](#).
2. Install the [battery frame](#).
3. Install the [heat sink](#).
4. Install the [left/video fan](#).
5. Install the [right/processor fan](#).
6. Install the [wireless card](#).
7. Install the [M.2 2230 solid state drive](#) or [M.2 2280 solid state drive](#), whichever is applicable.
8. Install the [battery](#).
9. Install the [base cover](#).
10. Follow the procedure in [After working inside your computer](#).

## Power button

### Removing the power button

 **CAUTION:** The information in this removal section is intended for authorized service technicians only.

#### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).

3. Remove the [battery](#).
4. Remove the [M.2 2230 solid state drive](#) or [M.2 2280 solid state drive](#), whichever is applicable.
5. Remove the [wireless card](#).
6. Remove the [right/processor fan](#).
7. Remove the [left/video fan](#).
8. Remove the [heat sink](#).


**NOTE:** If you are removing the system board to replace/access other parts, you may remove the system board with the heat sink attached to it in order to simplify the procedure and preserve the thermal bond between the system board and heat sink.

9. Remove the [battery frame](#).
10. Remove the [system board](#).

**NOTE:** If you are removing the system board to replace/access other parts, you may remove the system board with the heat sink attached to it in order to simplify the procedure and preserve the thermal bond between the system board and heat sink.

## About this task

The following image indicates the location of the power button and provides a visual representation of the removal procedure.

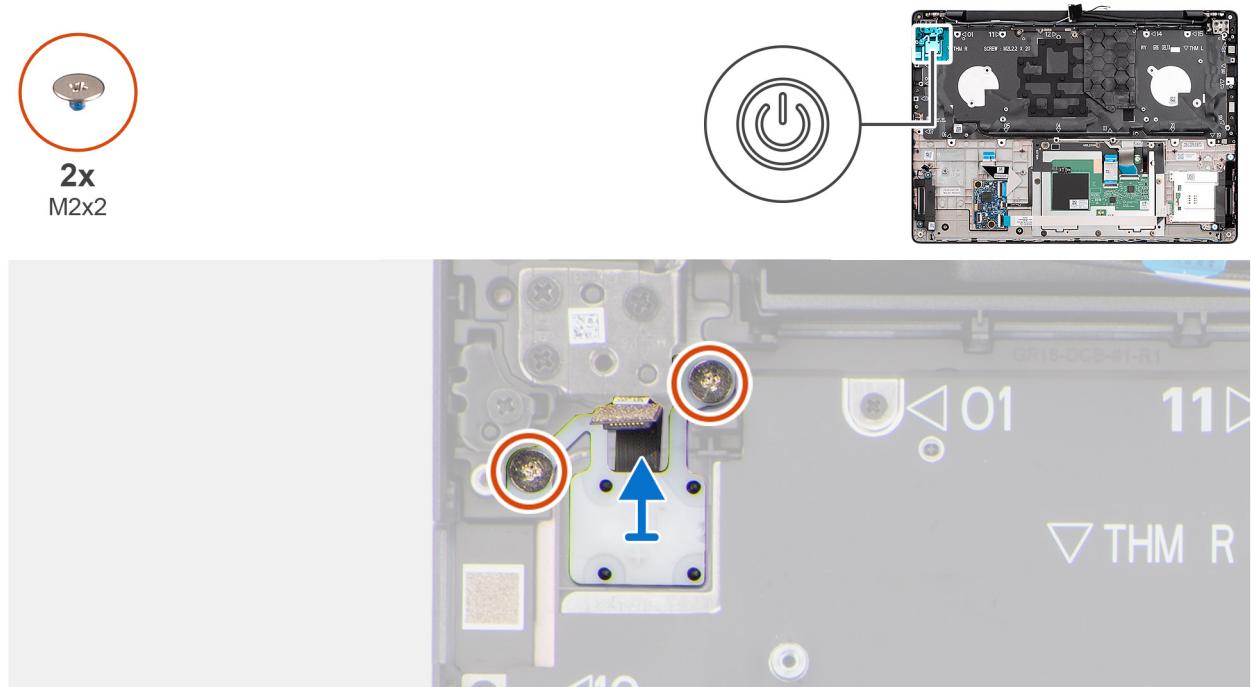

**Figure 81. Removing the power button**

### Steps

1. Remove the two screws (M2x2) that secure the power button to the palm-rest assembly.
2. Lift the power button off the slot on the palm-rest assembly.

## Installing the power button


**CAUTION:** The information in this installation section is intended for authorized service technicians only.

### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

## About this task

The following image indicates the location of the power button and provides a visual representation of the installation procedure.

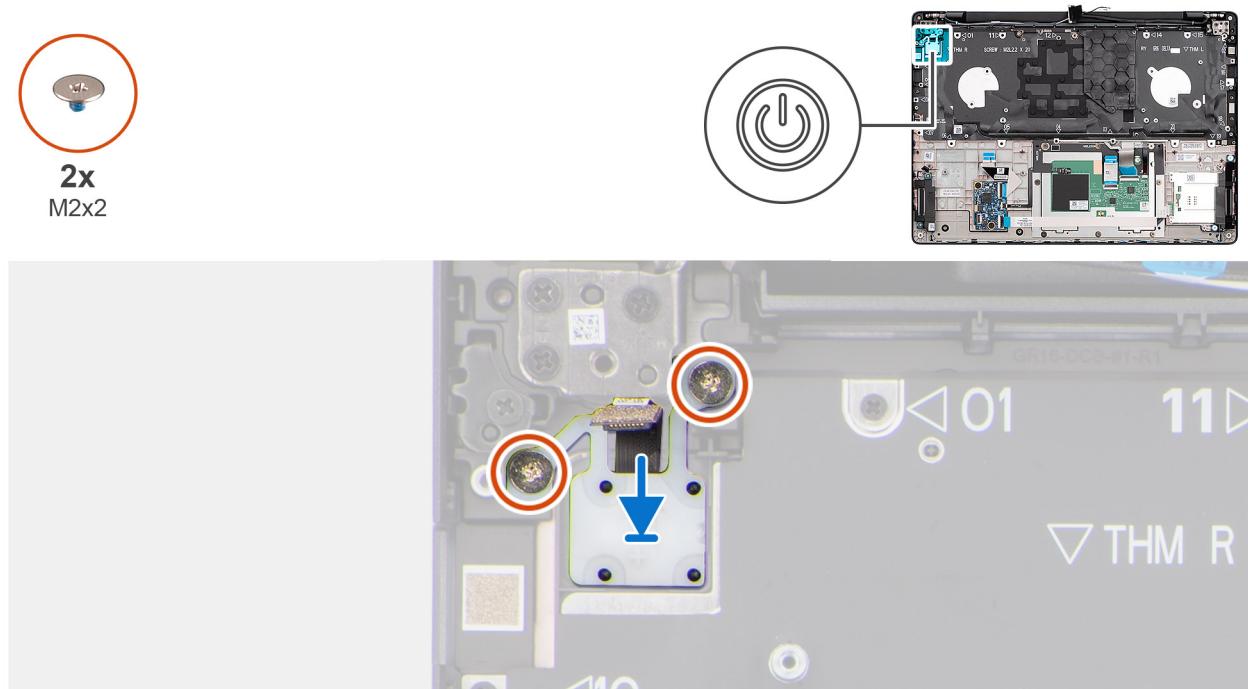

**Figure 82. Installing the power button**

### Steps

1. Place the power button in the slot on the palm-rest assembly.
2. Align the screw holes on the power button with the screw holes on the palm-rest assembly.
3. Replace the two screws (M2x2) to secure the power button to the palm-rest assembly.

### Next steps

1. Install the [system board](#).
2. Install the [battery frame](#).
3. Install the [heat sink](#).
4. Install the [left/video fan](#).
5. Install the [right/processor fan](#).
6. Install the [wireless card](#).
7. Install the [M.2 2230 solid state drive](#) or [M.2 2280 solid state drive](#), whichever is applicable.
8. Install the [battery](#).
9. Install the [base cover](#).
10. Follow the procedure in [After working inside your computer](#).

## Keyboard

### Removing the keyboard

**CAUTION:** The information in this removal section is intended for authorized service technicians only.

#### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).

2. Remove the [base cover](#).
3. Remove the [battery](#).
4. Remove the [M.2 2230 solid state drive](#) or [M.2 2280 solid state drive](#), whichever is applicable.
5. Remove the [wireless card](#).
6. Remove the [speakers](#).
7. Remove the [right/processor fan](#).
8. Remove the [left/video fan](#).
9. Remove the [heat sink](#).


**(i) NOTE:** If you are removing the system board to replace/access other parts, you may remove the system board with the heat sink attached to it in order to simplify the procedure and preserve the thermal bond between the system board and heat sink.

10. Remove the [GPU filler](#).
11. Remove the [system board](#).

**(i) NOTE:** If you are removing the system board to replace/access other parts, you may remove the system board with the heat sink attached to it in order to simplify the procedure and preserve the thermal bond between the system board and heat sink.

#### **About this task**

The following images indicate the location of the keyboard and provide a visual representation of the removal procedure.

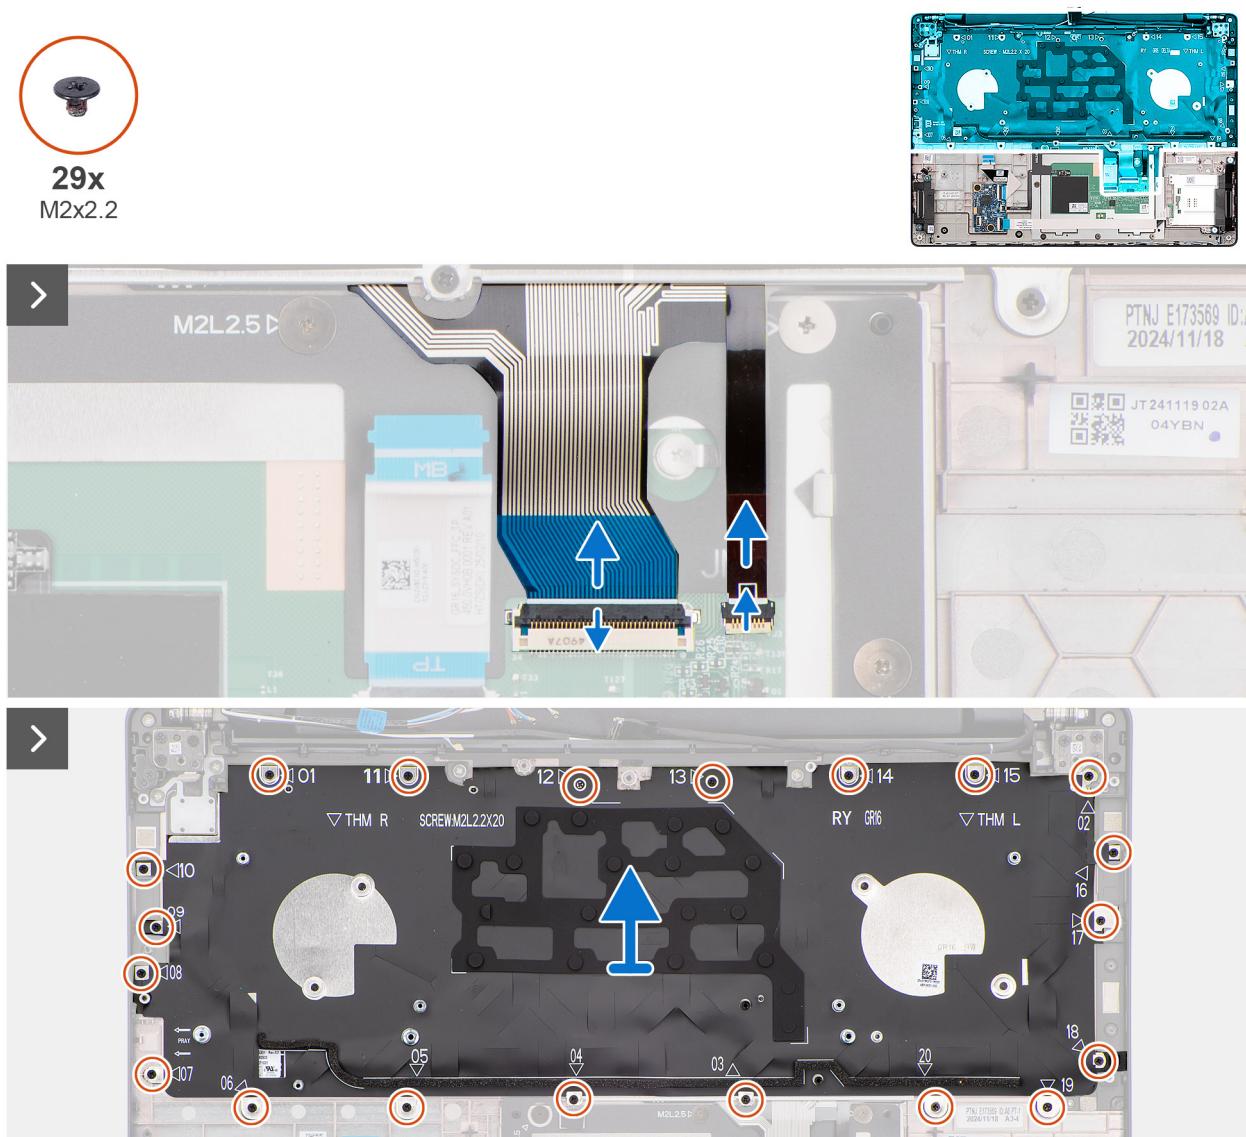

**Figure 83.** Removing the keyboard



**Figure 84.** Removing the keyboard

## Steps

1. Disconnect the keyboard cable from the connector (KEYBOARD) on the touchpad board.

2. Disconnect the keyboard-backlight cable from the connector (LIGHTING) on the touchpad board.

**NOTE:** This step applies only to computers shipped with a backlit keyboard installed.

3. Remove the 20 screws (M2x2.2) that secure the keyboard assembly to the palm-rest assembly.
4. Lift the keyboard assembly off the palm-rest assembly.
5. Remove the nine screws (M2x2.2) that secure the keyboard to the keyboard bracket.
6. Lift the keyboard off the keyboard bracket.

## Installing the keyboard

**CAUTION:** The information in this installation section is intended for authorized service technicians only.

### Prerequisites


If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task

The following images indicate the location of the keyboard and provide a visual representation of the installation procedure.



Figure 85. Installing the keyboard

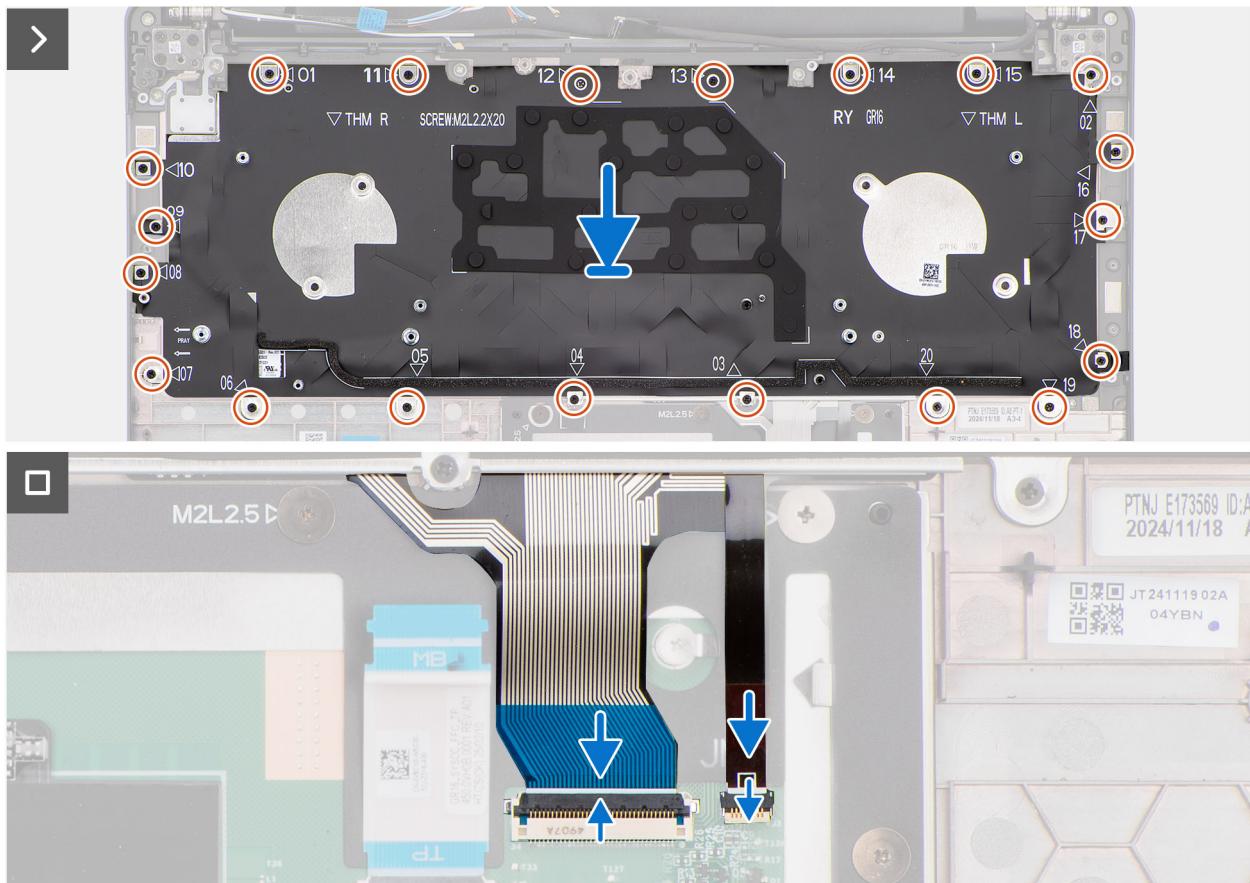

**Figure 86. Installing the keyboard**

### Steps

1. Align and place the keyboard over the keyboard bracket.
2. Replace the nine screws (M2x2.2) to secure the keyboard to the keyboard bracket.
3. Align and place the keyboard assembly in the slot on the palm-rest assembly.
4. Replace the 20 screws (M2x2.2) to secure the keyboard assembly to the palm-rest assembly.
5. Connect the keyboard cable to the connector (KEYBOARD) on the touchpad board.
6. Connect the keyboard-backlight cable to the connector (LIGHTING) on the touchpad board.

**i** **NOTE:** This step applies only to computers shipped with a backlit keyboard installed.

### Next steps

1. Install the [system board](#).
2. Install the [GPU filler](#).
3. Install the [heat sink](#).
4. Install the [left/video fan](#).
5. Install the [right/processor fan](#).
6. Install the [speakers](#).
7. Install the [wireless card](#).
8. Install the [M.2 2230 solid state drive](#) or [M.2 2280 solid state drive](#), whichever is applicable.
9. Install the [battery](#).
10. Install the [base cover](#).
11. Follow the procedure in [After working inside your computer](#).

# Palm-rest assembly

## Removing the palm-rest assembly

 **CAUTION:** The information in this removal section is intended for authorized service technicians only.

### Prerequisites

1. Follow the procedure in [Before working inside your computer](#).
2. Remove the [base cover](#).
3. Remove the [battery](#).
4. Remove the [M.2 2230 solid state drive](#) or [M.2 2280 solid state drive](#), whichever is applicable.
5. Remove the [wireless card](#).
6. Remove the [speakers](#).
7. Remove the [right/processor fan](#).
8. Remove the [left/video fan](#).
9. Remove the [heat sink](#).

 **NOTE:** If you are removing the system board to replace/access other parts, you may remove the system board with the heat sink attached to it in order to simplify the procedure and preserve the thermal bond between the system board and heat sink.

10. Remove the [GPU filler](#).
11. Remove the [battery frame](#).
12. Remove the [USH board](#).
13. Remove the [smart-card reader](#), if available.
14. Remove the [display assembly](#).
15. Remove the [system board](#).


 **NOTE:** If you are removing the system board to replace/access other parts, you may remove the system board with the heat sink attached to it in order to simplify the procedure and preserve the thermal bond between the system board and heat sink.

16. Remove the [power button](#).
17. Remove the [keyboard](#).

### About this task

 **NOTE:** The palm-rest assembly cannot be further disassembled once all the **Prerequisites** are completed. If the touchpad is malfunctioning and is required to be replaced, replace the entire palm-rest assembly.

The image below shows the palm-rest assembly after the **Prerequisites** have been performed.

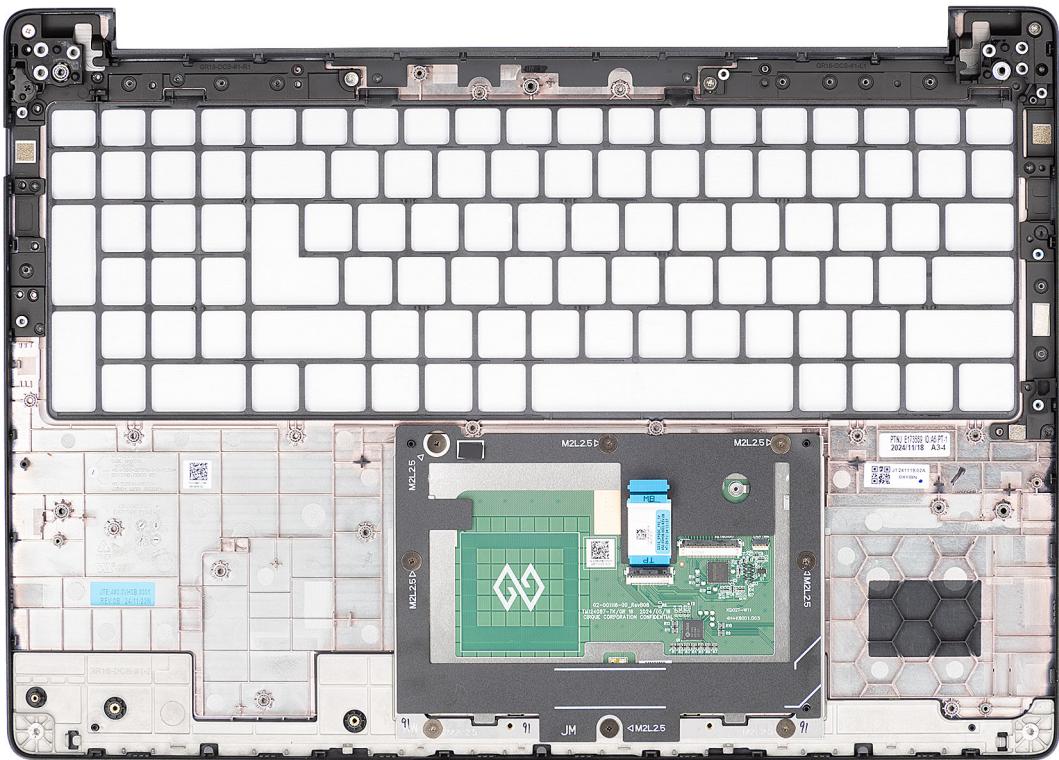

**Figure 87. Palm-rest assembly**

### Steps

After performing the **Prerequisites**, you are left with the palm-rest assembly.

## Installing the palm-rest assembly

**CAUTION:** The information in this installation section is intended for authorized service technicians only.


### Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

### About this task

**NOTE:** The system board can be installed with the heat sink attached to it in order to simplify the procedure and preserve the thermal bond between the system board and heat sink.

The image below shows the palm-rest assembly.

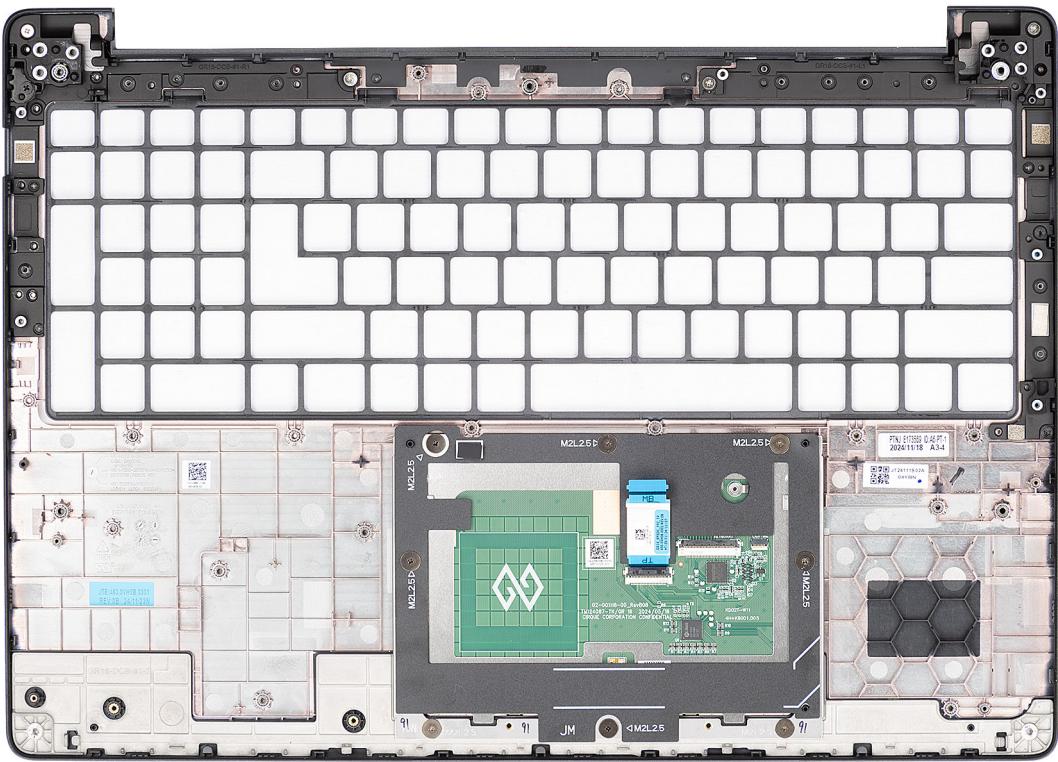

**Figure 88. Palm-rest assembly**

### Steps

Place the palm-rest assembly on a flat surface and perform the **Next steps** to install the palm-rest assembly.

### Next steps

1. Install the [keyboard](#).
2. Install the [power button](#).
3. Install the [system board](#).
4. Install the [display assembly](#).
5. Install the [smart-card reader](#), if available.
6. Install the [USH board](#).
7. Install the [battery frame](#).
8. Install the [GPU filler](#).
9. Install the [heat sink](#).
10. Install the [left/video fan](#).
11. Install the [right/processor fan](#).
12. Install the [speakers](#).
13. Install the [wireless card](#).
14. Install the [M.2 2230 solid state drive](#) or [M.2 2280 solid state drive](#), whichever is applicable.
15. Install the [battery](#).
16. Install the [base cover](#).
17. Follow the procedure in [After working inside your computer](#).

# Software

This chapter details the supported operating systems along with instructions on how to install the drivers.

## Operating system

Your Dell Pro Max 16 MC16255 supports the following operating systems:

- Windows 11 Home
- Windows 11 Pro
- Ubuntu Linux 22.04 LTS, 64-bit

## Drivers and downloads

When troubleshooting, downloading, or installing drivers, it is recommended that you read the Dell Knowledge Base article [Drivers and Downloads FAQs](#).

# BIOS Setup

**⚠ CAUTION:** Certain changes can make your computer work incorrectly. Before you change the settings in BIOS Setup, it is recommended that you note down the original settings for future reference.

**ⓘ NOTE:** Depending on the computer and the installed devices, the options that are listed in this section may differ.

Use BIOS Setup for the following purposes:

- Get information about the hardware installed in your computer, such as the amount of RAM and the capacity of the storage device.
- Change the system configuration information.
- Set or change user-selectable options such as the user password, enabling or disabling base devices, and configuring hard drive settings.

## Entering BIOS Setup program

Turn on or restart your computer and press F2 immediately.

## Navigation keys

**ⓘ NOTE:** For most of the BIOS Setup options, changes that you make are recorded but do not take effect until you restart the computer.

**Table 37. Navigation keys**

Keys	Navigation
Up arrow	Moves to the previous field.
Down arrow	Moves to the next field.
Enter	Selects a value in the selected field (if applicable) or follows the link in the field.
Spacebar	Expands or collapses a drop-down list, if applicable.
Tab	Moves to the next focus area.
Esc	Moves to the previous page until you view the main screen. Pressing Esc in the main screen displays a message that prompts you to save any unsaved changes and restart the computer.

## F12 One Time Boot menu

To enter the One Time Boot menu, turn on or restart your computer, and then press F12 immediately.

**ⓘ NOTE:** If you are unable to enter the One Time Boot menu, repeat the above action.

The One Time Boot menu displays the devices that you can boot from and also display the options to start diagnostics. The boot menu options are:

- Windows Boot Manager
- UEFI M.2 solid state drive Boot
- UEFI HTTPs Boot

- Diagnostics

The One Time Boot menu screen also displays the option to access BIOS Setup.

## View Advanced Setup options

### About this task

Some BIOS Setup options are only visible by enabling **Advanced Setup** mode, which is disabled by default.

**(i) NOTE:** BIOS Setup options, including **Advanced Setup** options, are described in the **System setup options** option.

### To enable Advanced Setup:

#### Steps

1. Enter BIOS Setup.  
The Overview menu appears.
2. Click the **Advanced Setup** option to move it to the **ON** mode.  
**Advanced** BIOS Setup options are displayed.

## View Service options

### About this task

Service options are hidden by default and only visible by entering a hotkey command.

**(i) NOTE:** Service options are described in **BIOS Setup options**.

### To view Service options:

#### Steps

1. Enter BIOS Setup.  
The Overview menu appears.
2. Enter the hotkey combination **Ctrl + Alt + s** to view the **Service** options.  
**Service** options are displayed.

## BIOS Setup options

**(i) NOTE:** For most of the System Setup options, changes that you make are recorded but do not take effect until you restart the computer.

**(i) NOTE:** Depending on your computer and its installed devices, the items that are listed in this section may differ.

**Table 38. System Setup options—Overview menu**

Overview	
<b>Dell Pro Max 16 MC16255</b>	
BIOS Version	Displays the BIOS version number.
Service Tag	Displays the Service Tag of the computer.
Asset Tag	Displays the Asset Tag of the computer.
Manufacture Date	Displays the manufacture date of the computer.
Ownership Date	Displays the ownership date of the computer.
Express Service Code	Displays the Express Service Code of the computer.

**Table 38. System Setup options—Overview menu (continued)**

<b>Overview</b>	
Ownership Tag	Displays the Ownership Tag of the computer.
<b>BATTERY</b> Information	
Primary	Displays the primary battery of the computer.
Battery Level	Displays the battery level of the computer.
Battery State	Displays the battery state of the computer.
Health	Displays the battery health of the computer.
AC Adapter	Displays whether an AC adapter is connected. If connected, displays the type of AC adapter that is connected.
Battery Life Type	Displays the battery life type of the computer.
<b>PROCESSOR</b> Information	
Processor Type	Displays the processor type.
Maximum Clock Speed	Displays the maximum processor clock speed. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Minimum Clock Speed	Displays the minimum processor clock speed. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Current Clock Speed	Displays the current processor clock speed. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Core Count	Displays the total core count of the processor.
Processor ID	Displays the processor ID.
Microcode Version	Displays the microcode version of the processor.
Simultaneous Multi-Threading Capable	Displays whether the processor is Simultaneous Multi-Threading capable or not.
<b>MEMORY</b> Information	
Memory Installed	Displays the total memory installed on the computer.
Memory Available	Displays the total memory available on the computer.
Memory Speed	Displays the memory speed. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Memory Channel Mode	Displays the channel mode that is used for the memory.
Memory Technology	Displays the technology that is used for the memory.
DIMM 1 Size	Displays the total memory that is installed in DIMM Slot 1.
DIMM 2 Size	Displays the total memory that is installed in DIMM Slot 2.
DIMM 3 Size	Displays the total memory that is installed in DIMM Slot 3.
DIMM 4 Size	Displays the total memory that is installed in DIMM Slot 4.
<b>DEVICES</b> Information	
Panel Type	Displays the type of display panel available on the computer.
Panel Revision	Displays the revision of display panel available on the computer.
Video Controller	Displays the type of video controller available on the computer.

**Table 38. System Setup options—Overview menu (continued)**

<b>Overview</b>	
Video Memory	Displays the video memory information of the computer.
Wi-Fi Device	Displays the wireless device information of the computer.
Native Resolution	Displays the native resolution of the computer.
Video BIOS Version	Displays the video BIOS version of the computer.
Audio Controller	Displays the audio controller information of the computer.
Bluetooth Device	Displays the Bluetooth device information of the computer.
LOM MAC Address	Displays the LOM (LAN on Motherboard) MAC address of the computer.
Pass Through MAC Address	Displays the MAC address of the video pass-through.
dGPU Video Controller	Displays the dGPU video controller information of the computer.

**Table 39. System Setup options—Boot Configuration menu**

<b>Boot Configuration</b>	
<b>Boot Sequence</b>	
Boot Sequence	Displays the boot sequence.
Enable PXE Boot Priority	When enabled, any new PXE boot option that is detected by the computer is added to the top of the Boot Sequence. By default, the <b>Enable PXE Boot Priority</b> option is disabled.
Secure Digital (SD) Card Boot	Enables or disables read-only boot from Secure Digital (SD) card. By default, the <b>Secure Digital (SD) Card Boot</b> option is disabled.
<b>Secure Boot</b>	
Enable Secure Boot	Enables the computer to boot using only validated boot software. By default, this <b>Enable Secure Boot</b> option is disabled. For additional security, Dell Technologies recommends keeping the <b>Secure Boot</b> option enabled to ensure that the UEFI firmware validates the operating system during the boot process. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> . <b>NOTE:</b> To enable Secure Boot, the computer must be in UEFI boot mode and the Enable Legacy Option ROMs option must be turned off.
Enable Microsoft UEFI CA	When disabled, the UEFI CA is removed from the BIOS UEFI Secure Boot database ('db' variable). <b>CAUTION:</b> If you disable Microsoft UEFI CA, the computer may not boot, computer graphics may not function, some devices may not function properly, and the computer could become unrecoverable. Microsoft HLK requirements for DeviceGuard require the UEFI 3 <sup>rd</sup> Party CA removal from the UEFI SecureBoot database (db). Setting this option to Allow Pre-Boot Modules Only, will allow the UEFI 3 <sup>rd</sup> party CA to be used to validate pre-boot option ROMs, but will not allow a bootloader signed with the UEFI 3 <sup>rd</sup> party CA to be loaded.

**Table 39. System Setup options—Boot Configuration menu (continued)**

<b>Boot Configuration</b>	
	For additional security, Dell Technologies recommends setting the Microsoft UEFI CA option to <b>Enabled</b> to ensure the broadest compatibility with devices and operating systems.
Secure Boot Mode	Enables or disables the Secure Boot operation mode. By default, the <b>Deployed Mode</b> is selected. <b>Deployed Mode</b> should be selected for normal operation of Secure Boot. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Expert Key Management</b>	
Enable Custom Mode	Enables or disables the keys in the PK, KEK, db, and dbx security key databases to be modified. By default, the <b>Enable Custom Mode</b> option is disabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Custom Mode Key Management	Selects the custom values for expert key management. By default, the <b>PK</b> option is selected. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 40. System Setup options—Integrated Devices menu**

<b>Integrated Devices</b>	
<b>Date/Time</b>	
Date	Sets the computer date in MM/DD/YYYY format. Changes to the date format take effect immediately.
Time	Sets the computer time in HH/MM/SS 24-hour format. You can select between a 12-hour or 24-hour clock. Changes to the time format take effect immediately.
<b>Camera</b>	
Enable Camera	Enables the camera. By default, the <b>Enable Camera</b> option is enabled. <b>NOTE:</b> Depending on the configuration ordered, the camera setup option may not be available.
<b>Audio</b>	
Enable Audio	Enables all integrated audio controller. By default, all the options are enabled.
Enable Microphone	Enables the microphone. By default, the <b>Enable Microphone</b> option is enabled. <b>NOTE:</b> Depending on the configuration ordered, the microphone setup option may not be available.
Enable Internal Speaker	Enables the internal speaker. By default, the <b>Enable Internal Speaker</b> option is enabled.
<b>USB/Thunderbolt Configuration</b>	
Enable External USB Ports	Enables the external USB ports.

**Table 40. System Setup options—Integrated Devices menu (continued)**

Integrated Devices	
	By default, the <b>Enable External USB Ports</b> option is enabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Enable USB Boot Support	Enables booting from USB mass storage devices that are connected to external USB ports. By default, the <b>Enable USB Boot Support</b> option is enabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Enable Thunderbolt Technology Support</b>	Enables the associated ports and adapters for Thunderbolt Technology support. By default, the <b>Enable Thunderbolt Technology Support</b> option is enabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Enable Thunderbolt Boot Support</b>	Enables the Thunderbolt adapter-peripheral device and USB devices that are connected to the Thunderbolt adapter to be used during BIOS Preboot. By default, the <b>Enable Thunderbolt Boot Support</b> option is disabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Video/Power only on Type-C Ports</b>	Enables or disables the Type-C port functionality to video or only power. By default, the <b>Video/Power only on Type-C Ports</b> option is disabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Miscellaneous Devices	
Enable Fingerprint Reader Device	Enables or disables the Fingerprint Reader Device option. By default, the <b>Enable Fingerprint Reader Device</b> option is enabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 41. System Setup options—Storage menu**

Storage	
<b>SATA/NVMe Operation</b>	Sets the operating mode of the integrated SATA hard drive controller. By default, the <b>RAID On</b> option is selected.
<b>Storage Interface</b>	Displays the information of various onboard drives.
Port Enablement	Enables or disables the M.2 PCIe SSD option. By default, the <b>M.2 PCIe SSD-1</b> and <b>M.2 PCIe SSD-2</b> options are enabled.
SMART Reporting	
Enable SMART Reporting	Enables or disables the SMART reporting option. By default, the <b>Enable SMART Reporting</b> option is disabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Drive Information	Displays the information of onboard drives.

**Table 41. System Setup options—Storage menu (continued)**

<b>Storage</b>	
<b>Enable MediaCard</b>	
Secure Digital (SD) Card	Enables or disables the SD card. By default, the <b>Secure Digital (SD) Card</b> option is enabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Secure Digital (SD) Card Read-Only Mode	Enables or disables the SD card read-only mode. By default, the <b>Secure Digital (SD) Card Read-Only Mode</b> option is disabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 42. System Setup options—Display menu**

<b>Display</b>	
<b>Full Screen Logo</b>	
Full Screen Logo	Enables or disables the computer to display full screen logo, if the image matches screen resolution. By default, the <b>Full Screen Logo</b> option is disabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 43. System Setup options—Connection menu**

<b>Connection</b>	
<b>Network Controller Configuration</b>	
Integrated NIC	Enables or disables the onboard LAN controller. By default, the <b>Integrated NIC</b> option is set to <b>Enabled with PXE</b> .
<b>Wireless Device Enable</b>	
WLAN	Enables or disables the internal WLAN device. By default, the <b>WLAN</b> option is enabled.
Bluetooth	Enables or disables the internal Bluetooth device. By default, the <b>Bluetooth</b> option is enabled.
Contactless smartcard/NFC	Enables or disables the smartcard device. By default, the <b>Contactless smartcard/NFC</b> option is enabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Enable UEFI Network Stack</b>	
Enable UEFI Network Stack	Enables or disables the UEFI Network Stack and controls the onboard LAN Controller. By default, the <b>Enable UEFI Network Stack</b> option is set to <b>Auto Enabled</b> . <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Wireless Radio Control</b>	
Control WLAN Radio	Enable to sense the connection of the computer to a wired network and then disables the selected WLAN radio. Upon disconnection from the wired network, the selected wireless radios are reenabled.

**Table 43. System Setup options—Connection menu (continued)**

Connection	
	By default, the <b>Control WLAN Radio</b> option is disabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
HTTP(s) Boot Feature	
HTTP(s) Boot	When enabled, supports HTTP(s) boot on the client BIOS, which offers wired or wireless and HTTP/HTTPS connection options.  By default, the <b>HTTP(s) Boot</b> option is enabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
HTTP(s) Boot Modes	In Auto Mode, the boot URL is obtained from the DHCP response; the boot URL specifies the HTTP Boot Server and location of the Network Boot Program (NBP) file. In Manual mode, the user enters the URL in the text box, which must start with <code>http://</code> or <code>https://</code> and end with the NBP file name.  By default, <b>Auto Mode</b> is selected.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
CA Certificate	Upload or delete the CA certificate.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 44. System Setup options—Power menu**

Power	
<b>Battery Configuration</b>	Enables or disables the computer to run on battery during peak power usage hours. Use the table <b>Custom Charge Start</b> and <b>Custom Charge Stop</b> , to prevent AC power usage between certain times of each day.  By default, the <b>Adaptive</b> option is selected. Battery settings are adaptively optimized based on your typical battery usage pattern.
<b>Advanced Configuration</b>	  <b>Enable Advanced Battery Charge Configuration</b> Enables Advanced Battery Charge Configuration from the beginning of the day to a specified work period. When enabled, Advanced Battery Charged maximizes battery health while still supporting heavy use during the work day.  By default, the <b>Enable Advanced Battery Charge Configuration</b> option is disabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Peak Shift</b>	  <b>Enable Peak Shift</b> Enables or disables the computer to run on battery during peak power usage hours.  By default, the <b>Enable Peak Shift</b> option is disabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Type-C Connector Power</b>	Allows you to set the maximum power that can be drawn from the Type-C connector.  By default, the <b>Type-C Connector Power</b> option is set to 7.5 W.

**Table 44. System Setup options—Power menu (continued)**

Power	
USB PowerShare	
Enable USB PowerShare	Enables or disables the USB PowerShare on the computer. By default, the <b>Enable USB PowerShare</b> option is disabled.
Thermal Management	
	This setting allows for cooling of fan and processor heat management to adjust system performance, noise and temperature. By default, the <b>Optimized</b> option is selected.
USB Wake Support	
Wake on Dell USB-C Dock	When enabled, connecting a Dell USB-C Dock wakes the computer from Standby, Hibernate, and Power Off. By default, the <b>Wake on Dell USB-C Dock</b> option is enabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Lid Switch	
Enable Lid Switch	Enables or disables the Lid Switch. By default, the <b>Enable Lid Switch</b> option is enabled.
Power On Lid Open	When enabled, allows the computer to turn on from the off state whenever the lid is opened. By default, the <b>Power On Lid Open</b> option is enabled.

**Table 45. System Setup options—Security menu**

Security	
TPM 2.0 Security	
TPM 2.0 Security On	Trusted Platform Module (TPM) is a security device that stores computer-generated keys for encryption and features such as BitLocker, Virtual Secure Mode, remote Attestation. By default, the <b>TPM 2.0 Security</b> option is enabled. For additional security, Dell Technologies recommends keeping the Trusted Platform Module (TPM) enabled to allow these security technologies to fully function.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Attestation Enable	The <b>Attestation Enable</b> option controls the endorsement hierarchy of TPM. Disabling the <b>Attestation Enable</b> option prevents TPM from being used to digitally sign certificates. By default, the <b>Attestation Enable</b> option is enabled. For additional security, Dell Technologies recommends keeping the <b>Attestation Enable</b> option enabled. <b>NOTE:</b> When disabled, this feature may cause compatibility issues or loss of functionality in some operating systems.

**Table 45. System Setup options—Security menu (continued)**

Security	
	<p><b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a>.</p>
Key Storage Enable	<p>The <b>Key Storage Enable</b> option controls the storage hierarchy of TPM, which is used to store digital keys. Disabling the <b>Key Storage Enable</b> option restricts the ability of TPM to store owner's data.</p> <p>By default, the <b>Key Storage Enable</b> option is enabled.</p> <p>For additional security, Dell Technologies recommends keeping the <b>Key Storage Enable</b> option enabled.</p> <p><b>NOTE:</b> When disabled, this feature may cause compatibility issues or loss of functionality in some operating systems.</p> <p><b>NOTE:</b> To view this option, enable <b>Service</b> options as described in <a href="#">View Service options</a>.</p>
Clear	<p>When enabled, the <b>Clear</b> option clears information that is stored in the TPM after exiting the system's BIOS. This option returns to the disabled state when the computer restarts.</p> <p>By default, the <b>Clear</b> option is disabled.</p> <p>Dell Technologies recommends enabling the <b>Clear</b> option only when TPM data is required to be cleared.</p> <p><b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a>.</p>
Physical Presence Interface (PPI) Bypass for Clear Commands	<p>The PPI Bypass for Clear Commands option allows the operating system to manage certain aspects of PTT. When enabled, you are not prompted to confirm changes to the PTT configuration.</p> <p>By default, the <b>PPI Bypass for Clear Commands</b> option is disabled.</p> <p>For additional security, Dell Technologies recommends keeping the <b>PPI Bypass for Clear Commands</b> option disabled.</p>
Chassis Intrusion	
Chassis Intrusion	<p>Enables or disables the detection of chassis intrusion events. This feature notifies the user when the base cover has been removed from the computer.</p> <p>When set to <b>Enabled</b>, a notification is displayed on the next boot and the event is logged in the BIOS Events log.</p> <p>When set to <b>Disabled</b>, no notification is displayed and no event is logged in the BIOS Events log.</p> <p>When set to <b>On-Silent</b>, the event is logged in the BIOS Events log, but no notification is displayed.</p> <p>By default, the <b>Chassis Intrusion Detection</b> option is set to <b>On-Silent</b>.</p> <p>For additional security, Dell Technologies recommends keeping the <b>Chassis Intrusion</b> option enabled.</p> <p><b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a>.</p>
Block Boot Until Cleared	<p>The <b>Block Boot Until Clear</b> option is enabled when <b>Chassis Intrusion</b> is enabled. When enabled, the computer does not boot until the chassis intrusion is cleared.</p> <p><b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a>.</p>

**Table 45. System Setup options—Security menu (continued)**

<b>Security</b>	
<b>AMD Memory Guard</b>	Enables or disables memory encryption. AMD Memory Guard encrypts the contents of RAM to provide enhanced protection against unauthorized access. While enabling this feature may make detecting RAM errors more difficult during testing, it will not produce false errors. Enabling AMD Memory Guard may have a small performance impact on memory. This feature is only available on CPUs with AMD Pro technology.  By default, the <b>AMD Memory Guard</b> option is disabled.
<b>Data Wipe on Next Boot</b>	
Start Data Wipe	Data Wipe is a secure wipe operation that deletes information from a storage device.  <b>⚠️ WARNING: The Secure Data Wipe operation deletes information in a way that it cannot be reconstructed.</b>  Commands such as delete and format in the operating system may remove files from showing up in the file system. However, they can be reconstructed through forensic means as they are still represented on the physical media. Data Wipe prevents this reconstruction and the data can no longer be recovered.  When enabled, the data wipe option provides prompts to wipe any storage devices that are connected to the computer on the next boot.  By default, the <b>Start Data Wipe</b> option is disabled.  <b>ⓘ NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Absolute</b>	Absolute Software provides various cyber security solutions, some requiring software preloaded on Dell computers and integrated into the BIOS. To use these features, you must enable the Absolute BIOS setting and contact Absolute for configuration and activation.  By default, the <b>Absolute</b> option is enabled.  For additional security, Dell Technologies recommends keeping the <b>Absolute</b> option enabled.  <b>⚠️ WARNING: The Permanently Disabled option can only be selected once. When Permanently Disabled is selected, Absolute Persistence cannot be reenabled. No further changes to the Enable/Disable states are allowed.</b>  <b>ⓘ NOTE:</b> The Enable/Disable options are unavailable while the computer is in the activated state.  <b>ⓘ NOTE:</b> When the Absolute features are activated, the Absolute integration cannot be disabled from the BIOS Setup screen.
<b>UEFI Boot Path Security</b>	Enables or disables the computer to prompt the user to enter the Administrator password (if set) when booting to a UEFI boot path device from the F12 boot menu.  By default, the <b>Always Except Internal HDD</b> option is enabled.  <b>ⓘ NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Authenticated BIOS Interface</b>	
Enable Authenticated BIOS Interface	Enables or disables the authenticated BIOS Interface.  By default, the <b>Enable Authenticated BIOS Interface</b> option is disabled.  <b>ⓘ NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 45. System Setup options—Security menu (continued)**

Security	
Clear Certificate Store	Deletes the certificates from KMS storage.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Legacy Manageability Interface Access</b>	Allows the administrator to control the access to BIOS configuration through the Legacy Manageability Interface option. When enabled, this prevents the BIOS Administrator password-based manageability tools from running, prevents some Dell software applications from reading configuration settings, and/or prevents changes to the BIOS configuration settings.  When enabled, this option only supports the Authenticated BIOS Manageability Interface (ABI) for managing the BIOS configuration changes. To support this feature, ABI must be enabled and provisioned.  When set to <b>Enabled</b> , the Legacy Manageability Interface can be used to read and change BIOS configuration settings.  When set to <b>Read-Only</b> , BIOS configuration settings can be read, but cannot be changed through the Legacy Manageability Interface.  When set to <b>Disabled</b> , the Legacy Manageability Interface is disabled. BIOS configuration reads and writes are blocked.
<b>Firmware Device Tamper Detection</b>	Allows you to control the firmware device tamper detection feature. This feature notifies the user when the firmware device is tampered. When enabled, a screen warning message is displayed on the computer and a tamper detection event is logged in the BIOS Events log. The computer fails to reboot until the event is cleared.  By default, the <b>Firmware Device Tamper Detection</b> option is set to <b>Silent</b> . For additional security, Dell Technologies recommends keeping the <b>Firmware Device Tamper Detection</b> option enabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Clear Firmware Device Tamper Detection	Allows you to clear the events that are logged when tampering of firmware device is detected.  By default, the <b>Clear Firmware Device Tamper Detection</b> option is disabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Pluton Security Processor</b>	Enables or disables the utilization of the Pluton Security Processor by the operating system to provide security services such as Key Storage Provider functionality.  By default, the <b>Pluton Security Processor</b> option is enabled. For additional security, Dell Technologies recommends keeping the <b>Pluton Security Processor</b> option enabled.

**Table 46. System Setup options—Passwords menu**

Passwords	
<b>Admin Password</b>	The Administrator Password prevents unauthorized access to the BIOS Setup options. Once the administrator password is set, the BIOS Setup options can only be modified after providing the correct password.  The following rules and dependencies apply to the Administrator Password - <ul style="list-style-type: none"><li>• The administrator password cannot be set if system and/or internal storage passwords are previously set.</li></ul>

**Table 46. System Setup options—Passwords menu (continued)**

Passwords	<ul style="list-style-type: none"><li>• The administrator password can be used in place of the system and/or internal storage passwords.</li><li>• When set, the administrator password must be provided during a firmware update.</li><li>• Clearing the administrator password also clears the system password (if set).</li></ul> <p>Dell Technologies recommends using an administrator password to prevent unauthorized changes to BIOS Setup options.</p>
System Password	<p>The System Password prevents the computer from booting to an operating system without entering the correct password.</p> <p>The following rules and dependencies apply when the System Password is used -</p> <ul style="list-style-type: none"><li>• The computer shuts down when idle for approximately 10 minutes at the system password prompt.</li><li>• The computer shuts down after three incorrect attempts to enter the system password.</li><li>• The computer shuts down when the <b>Esc</b> key is pressed at the <b>System Password</b> prompt.</li><li>• The system password is not prompted when the computer resumes from standby mode.</li></ul> <p>Dell Technologies recommends using the system password in situations where it is likely that a computer may be lost or stolen.</p>
M.2 PCIe SSD-0	<p>The M.2 PCIe SSD-0 password can be set to prevent unauthorized access of the data stored on the solid state drive. The computer prompts for the M.2 PCIe SSD-0 password during boot in order to unlock the drive. A password-secured solid state drive stays locked even when removed from the computer or placed into another computer. It prevents an attacker from accessing data on the drive without authorization.</p> <p>The following rules and dependencies apply when the M.2 PCIe SSD-0 Password option is used -</p> <ul style="list-style-type: none"><li>• The M.2 PCIe SSD-0 password option cannot be accessed when the solid state drive is disabled in the BIOS Setup.</li><li>• The computer shuts down when idle for approximately 10 minutes at the M.2 PCIe SSD-0 password prompt.</li><li>• The computer shuts down after three incorrect attempts to enter the solid state drive password and treats the solid state drive as not available.</li><li>• The solid state drive does not accept password unlock attempts after five incorrect attempts to enter the M.2 PCIe SSD-0 password from the BIOS Setup. The M.2 PCIe SSD-0 password must be reset for the new password unlock attempts.</li><li>• The computer treats the solid state drive as not available when the <b>Esc</b> key is pressed at the M.2 PCIe SSD-0 password prompt.</li><li>• The M.2 PCIe SSD-0 password is not prompted when the computer resumes from standby mode. When the solid state drive is unlocked by the user before the computer goes into standby mode, it remains unlocked after the computer resumes from standby mode.</li><li>• If the system and M.2 PCIe SSD-0 passwords are set to the same value, the solid state drive unlocks after the correct system password is entered.</li></ul> <p>Dell Technologies recommends using a M.2 PCIe SSD-0 password to protect unauthorized data access.</p>
M.2 PCIe SSD-1	<p>The M.2 PCIe SSD-1 password can be set to prevent unauthorized access of the data stored on the solid state drive. The computer prompts for the M.2 PCIe SSD-1 password during boot in order to unlock the drive. A password-secured solid state drive stays locked even when removed from the computer or placed into another computer. It prevents an attacker from accessing data on the drive without authorization.</p>

**Table 46. System Setup options—Passwords menu (continued)**

Passwords	<p>The following rules and dependencies apply when the M.2 PCIe SSD-1 Password option is used -</p> <ul style="list-style-type: none"><li>• The M.2 PCIe SSD-1 password option cannot be accessed when the solid state drive is disabled in the BIOS Setup.</li><li>• The computer shuts down when idle for approximately 10 minutes at the M.2 PCIe SSD-1 password prompt.</li><li>• The computer shuts down after three incorrect attempts to enter the solid state drive password and treats the solid state drive as not available.</li><li>• The solid state drive does not accept password unlock attempts after five incorrect attempts to enter the M.2 PCIe SSD-1 password from the BIOS Setup. The M.2 PCIe SSD-1 password must be reset for the new password unlock attempts.</li><li>• The computer treats the solid state drive as not available when the <b>Esc</b> key is pressed at the M.2 PCIe SSD-1 password prompt.</li><li>• The M.2 PCIe SSD-1 password is not prompted when the computer resumes from standby mode. When the solid state drive is unlocked by the user before the computer goes into standby mode, it remains unlocked after the computer resumes from standby mode.</li><li>• If the system and M.2 PCIe SSD-1 passwords are set to the same value, the solid state drive unlocks after the correct system password is entered.</li></ul> <p>Dell Technologies recommends using a M.2 PCIe SSD-1 password to protect unauthorized data access.</p>
Password Configuration	<p>The Password Configuration page includes several options for changing the requirements of BIOS passwords. You can modify the minimum and maximum length of the passwords as well as require passwords to contain certain character classes (upper case, lower case, digit, special character).</p> <p>When the <b>Upper Case Letter</b> option is enabled, the password requires at least one upper case letter.</p> <p>When the <b>Lower Case Letter</b> option is enabled, the password requires at least one lower case letter.</p> <p>When the <b>Digit</b> option is enabled, the password requires at least one numeric digit.</p> <p>When the <b>Special Character</b> option is enabled, the password requires at least one special character from the set: !"#\$%&amp;'()*+,-./;:&lt;=&gt;?@[{}]^_`{ }~.</p> <p>When setting <b>Minimum Characters</b> for password length, Dell Technologies recommends setting the minimum password length to at least eight characters.</p> <p><b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a>.</p>
Password Changes	<p>Allow Non-Admin Password Changes</p> <p>The <b>Allow Non-Admin Password Changes</b> option in BIOS Setup allows an end user to set or change the system or hard drive passwords without entering the administrator password. This gives an administrator control over the BIOS settings but enables an end user to provide their own password.</p> <p>By default, the <b>Allow Non-Admin Password Changes</b> option is enabled.</p> <p>For additional security, Dell Technologies recommends keeping the <b>Allow Non-Admin Password Changes</b> option disabled.</p> <p><b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a>.</p>
Admin Setup Lockout	

**Table 46. System Setup options—Passwords menu (continued)**

<b>Passwords</b>	
Enable Admin Setup Lockout	<p>The <b>Admin Setup Lockout</b> option prevents an end user from even viewing the BIOS Setup configuration without first entering the administrator password (if set).</p> <p>By default, the <b>Enable Admin Setup Lockout</b> option is disabled.</p> <p>For additional security, Dell Technologies recommends keeping the <b>Admin Setup Lockout</b> option disabled.</p> <p><b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a>.</p>
<b>Master Password Lockout</b>	
Enable Master Password Lockout	<p>The <b>Master Password Lockout</b> option allows you to disable the Recovery Password feature. If the system, administrator, or hard drive password is forgotten, the computer becomes unusable.</p> <p><b>NOTE:</b> When the owner password is set, the Master Password Lockout option is not available.</p> <p><b>NOTE:</b> When an internal hard drive password is set, it must first be cleared before Master Password Lockout can be changed.</p> <p>By default, the <b>Enable Master Password Lockout</b> option is disabled.</p> <p>Dell Technologies does not recommend enabling the <b>Master Password Lockout</b> unless you have implemented your own password recovery system.</p> <p><b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a>.</p>
<b>Allow Non-Admin PSID Revert</b>	
Enable Allow Non-Admin PSID Revert	<p>The <b>Allow Non-Admin PSID Revert</b> option allows a user to clear the hard drive password without entering the BIOS Admin Password. When an Admin Password is set, the ability to enter the PSID is protected by requiring authentication with the Admin Password. If this option is enabled, any user can clear the drive without entering the Admin Password.</p> <p>By default, the <b>Enable Allow Non-Admin PSID Revert</b> option is disabled.</p> <p><b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a>.</p>

**Table 47. System Setup options—Update, Recovery menu**

<b>Update, Recovery</b>	
<b>UEFI Capsule Firmware Updates</b>	
Enable UEFI Capsule Firmware Updates	<p>Enables or disables the user to recover from certain corrupted BIOS conditions from a recovery file on the user primary hard drive or an external USB drive.</p> <p>By default, the <b>Enable UEFI Capsule Firmware Updates</b> option is enabled.</p> <p><b>NOTE:</b> BIOS Recovery from Hard Drive is not available for self-encrypting drives (SED).</p> <p><b>NOTE:</b> BIOS recovery is designed to fix the main BIOS block and cannot work if the Boot Block is damaged. In addition, this feature cannot work in the event of EC corruption, ME corruption, or a hardware issue. The recovery image must exist on an unencrypted partition on the drive.</p> <p><b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a>.</p>

**Table 47. System Setup options—Update, Recovery menu (continued)**

<b>Update, Recovery</b>	
<b>BIOS Recovery from Hard Drive</b>	Enables or disables the user to recover from certain corrupted BIOS conditions from a recovery file on the user primary hard drive or an external USB drive. By default, the <b>BIOS Recovery from Hard Drive</b> option is enabled. <b>NOTE:</b> BIOS Recovery from Hard Drive is not available for self-encrypting drives (SED). <b>NOTE:</b> BIOS recovery is designed to fix the main BIOS block and cannot work if the Boot Block is damaged. In addition, this feature cannot work in the event of EC corruption, ME corruption, or a hardware issue. The recovery image must exist on an unencrypted partition on the drive. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>BIOS Downgrade</b>	Allows downgrading of the system firmware to previous revisions. By default, the <b>Allow BIOS Downgrade</b> option is enabled.
<b>SupportAssist OS Recovery</b>	Enables or disables the boot flow for SupportAssist OS Recovery tool if certain system errors occur. By default, the <b>SupportAssist OS Recovery</b> option is enabled.
<b>BIOSConnect</b>	Enables or disables cloud service operating system recovery if the main operating system fails to boot with the number of failures equal to or greater than the value specified by the Auto OS Recovery Threshold setup option and local service operating system does not boot or is not installed. By default, the <b>BIOSConnect</b> option is enabled.
<b>Dell Auto OS Recovery Threshold</b>	Allows the control of the automatic boot flow for the SupportAssist System Resolution Console and the Dell OS Recovery Tool. By default, the <b>Dell Auto OS Recovery Threshold</b> value is set to <b>2</b> . <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 48. System Setup options—System Management menu**

<b>System Management</b>	
<b>Service Tag</b>	Displays the Service Tag of the computer.
<b>Asset Tag</b>	Creates a computer Asset Tag that an IT administrator can use to uniquely identify a particular computer. <b>NOTE:</b> Once set in the BIOS, the Asset Tag cannot be changed.
<b>AC Behavior</b>	Enables or disables the computer to turn on and go to boot when AC power is supplied to the computer. By default, the <b>Wake on AC</b> option is disabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Wake on LAN</b>	Enables or disables the computer to turn on by a special LAN signal. By default, the <b>Wake on LAN</b> option is disabled. <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 48. System Setup options—System Management menu (continued)**

<b>System Management</b>	
<b>Auto On Time</b>	Enable to set the computer to turn on automatically every day or on a preselected date and time. This option can be configured only if the Auto On Time is set to Everyday, Weekdays, or Selected Days.  By default, the <b>Auto On Time</b> option is disabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Diagnostics</b>	
OS Agent Requests	Enable or disable the option for applications running in the operating system to run with preboot diagnostics on subsequent boots.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Power-On-Self-Test Automatic Recovery</b>	
	Enable or disable the automatic recovery of the computer from no power or no-POST failure by applying mitigation steps.  By default, the <b>Power-On-Self-Test Automatic Recovery</b> option is enabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>DASH Support</b>	Enable or disable the automatic recovery of the computer from no power or no-POST failure by applying mitigation steps.  By default, the <b>DASH Support</b> option is disabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 49. System Setup options—Keyboard menu**

<b>Keyboard</b>	
<b>Numlock Enable</b>	
Enable Numlock	Enables or disables the Numlock option when the computer boots.  By default, the <b>Enable Numlock</b> option is enabled.
<b>Fn Lock Options</b>	
Fn Lock Options	Enables or disables the Fn Lock option.  By default, the <b>Fn Lock</b> option is enabled.
Lock Mode	By default, the <b>Lock Mode Secondary</b> option is selected. With this option, the F1-F12 keys scan the code for their secondary functions.
<b>Keyboard Illumination</b>	Configures the operating mode of the keyboard illumination feature.  By default, the <b>Dim</b> option is selected. The keyboard illumination level is set to 50%.
<b>Keyboard Backlight Timeout on AC</b>	Sets the timeout value for the keyboard backlight when an AC adapter is connected to the computer.  By default, the <b>10 seconds</b> option is selected.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Keyboard Backlight Timeout on Battery</b>	Sets the timeout value for the keyboard backlight when the computer is running only on the battery power. The keyboard backlight timeout value is only effective when the backlight is enabled.

**Table 49. System Setup options—Keyboard menu (continued)**

Keyboard
By default, the <b>10 seconds</b> option is selected.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 50. System Setup options—Pre-boot Behavior menu**

Pre-boot Behavior
Adapter Warnings
Enable Adapter Warnings  Enables the warning messages during boot when the adapters with less power capacity are detected.  By default, the <b>Enable Adapter Warnings</b> option is enabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Warnings and Errors
Enables or disables the action to be taken when a warning or error is encountered.  By default, the <b>Prompt on Warnings and Errors</b> option is selected.  <b>NOTE:</b> Errors deemed critical to the operation of the computer hardware stop the functioning of the computer.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Extend BIOS POST Time
Sets the BIOS POST (Power-On Self-Test) load time.  By default, the <b>0 seconds</b> option is selected.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
MAC Address Pass-Through
Replaces the external NIC MAC address (in a supported dock or dongle) with the selected MAC address from the computer.  By default, the <b>System Unique MAC Address</b> option is selected.
Sign of Life
Early Keyboard Backlight  Enables or disables the Keyboard Backlight Sign of Life.  By default, the <b>Early Keyboard Backlight</b> option is enabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 51. System Setup options—Virtualization menu**

Virtualization Support
AMD-V Technology
Enable AMD-V Technology  Specifies whether a measured Virtual Machine Monitor (MVMM) can use the additional hardware capabilities provided by AMD-V Technology.  By default, the <b>Enable AMD-V Technology</b> option is enabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
AMD-Vi Technology

**Table 51. System Setup options—Virtualization menu (continued)**

<b>Virtualization Support</b>	
Enable AMD-Vi Technology (IOMMU v2)	Specifies whether a measured Virtual Machine Monitor (MVMM) can use the additional hardware capabilities provided by AMD-Vi Technology. By default, the <b>Enable AMD-Vi Technology (IOMMU v2)</b> option is enabled.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>DMA Protection</b>	
Enable Pre-Boot DMA Support	Allows you to control the Pre-Boot DMA protection for both internal and external ports. This option does not directly enable DMA protection in the operating system.  <b>NOTE:</b> This option is not available when the virtualization setting for IOMMU is disabled (VT-d/AMD Vi).  By default, the <b>Enable Pre-Boot DMA Support</b> option is enabled.  For additional security, Dell Technologies recommends keeping the <b>Enable Pre-Boot DMA Support</b> option enabled.  <b>NOTE:</b> This option is provided only for compatibility purposes, since some older hardware is not DMA capable.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Enable OS Kernel DMA Support	Allows you to control the Kernel DMA protection for both internal and external ports. This option does not directly enable DMA protection in the operating system. For operating systems that support DMA protection, this setting indicates to the operating system that the BIOS supports the feature.  <b>NOTE:</b> This option is not available when the virtualization setting for IOMMU is disabled (VT-d/AMD Vi).  By default, the <b>Enable OS Kernel DMA Support</b> option is enabled.  <b>NOTE:</b> This option is provided only for compatibility purposes, since some older hardware is not DMA capable.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
Internal Port DMA Compatibility Mode	When enabled, BIOS will notify the operating system if the internal ports are not DMA capable.  <b>NOTE:</b> This option is not available when the virtualization setting for IOMMU is disabled (VT-d/AMD Vi).  By default, the <b>Internal Port DMA Compatibility Mode</b> option is disabled.  <b>NOTE:</b> This option is provided only for compatibility purposes, since some older hardware is not DMA capable.  <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

**Table 52. System Setup options—Performance menu**

<b>Performance</b>	
<b>C-States Control</b>	
Enable C-States Control	Enables the ability of the CPU to enter and exit low power states. When set to Off, it disables all C-states. When set to On, it enables all C-states that the chipset/platform allows.  By default, the <b>Enable C-States Control</b> option is enabled.

**Table 52. System Setup options—Performance menu (continued)**

<b>Performance</b>	
<b>AMD Simultaneous Multithreading</b>	
Enable AMD Simultaneous Multithreading	Enables or disables the AMD Simultaneous Multithreading mode of the processor. When enabled, the AMD Simultaneous Multithreading increases the efficiency of the processor resources when multiple threads run on each core.  By default, the <b>Enable AMD Simultaneous Multithreading</b> option is enabled.   <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>AMD Core Performance Boost</b>	
Enable AMD Core Performance Boost	Enables or disables AMD Core Performance Boost in the processor. When enabled, AMD Core Performance Boost dynamically adjusts processor frequency to provide a performance boost when requested by the operating system.  By default, the <b>Enable AMD Core Performance Boost</b> option is enabled.
<b>NUMA Nodes Per Socket</b>	
	Controls how system memory is distributed among processor cores.  By default, the <b>Auto</b> option is selected.

**Table 53. System Setup options—System Logs menu**

<b>System Logs</b>	
<b>BIOS Event Log</b>	
Clear BIOS Event Log	Select the option to keep or clear BIOS events logs.  By default, the <b>Keep Log</b> option is selected.   <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Thermal Event Log</b>	
Clear Thermal Event Log	Select the option to keep or clear thermal events logs.  By default, the <b>Keep Log</b> option is selected.   <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .
<b>Power Event Log</b>	
Clear Power Event Log	Select the option to keep or clear power events logs.  By default, the <b>Keep Log</b> option is selected.   <b>NOTE:</b> To view this option, enable <b>Advanced Setup</b> mode as described in <a href="#">View Advanced Setup options</a> .

## Updating the BIOS

### Updating the BIOS in Windows

#### About this task

 **CAUTION:** If BitLocker is not suspended before updating the BIOS, the BitLocker key is not recognized the next time you reboot the computer. You will then be prompted to enter the recovery key to proceed, and the computer displays a prompt for the recovery key on each reboot. Failure to provide the recovery key can result

in data loss or an operating system reinstall. For more information, refer [Updating the BIOS on Dell systems with BitLocker enabled](#).

 **CAUTION:** Do not turn off the computer during the BIOS flash update process. The computer may not boot if you turn off your computer.

#### Steps

1. Go to [Dell Support Site](#).
2. Go to **Identify your product or ask support**. In the box, enter the product identifier, model, service request or describe what you are looking for, and then click **Search**.  
 **NOTE:** If you do not have the Service Tag, click **Detect This PC**. The site automatically detects your device, and you can then click **Explore Product Support** to go to the support page for your device. You can also use the product ID or manually browse for your computer model.
3. Click **Drivers & Downloads**.
4. Select the operating system installed on your computer.
5. In the **Category** drop-down list, select **BIOS**.
6. Select the latest version of BIOS, and click **Download** to download the BIOS file for your computer.
7. After the download is complete, navigate to the folder where the BIOS update file has been saved.
8. Double-click the BIOS update file and follow the on-screen instructions.  
For more information, search [Dell Support Site](#).

## Updating the BIOS in Linux and Ubuntu

To update the system BIOS on a computer that is installed with Linux or Ubuntu, see [How to Update the Dell BIOS in the Ubuntu or Linux Environment](#) at [Dell Support Site](#).

## Updating the BIOS using the USB drive in Windows

#### About this task

 **CAUTION:** If BitLocker is not suspended before updating the BIOS, the BitLocker key is not recognized the next time you reboot the computer. You will then be prompted to enter the recovery key to proceed, and the computer displays a prompt for the recovery key on each reboot. Failure to provide the recovery key can result in data loss or an operating system reinstall. For more information, refer [Updating the BIOS on Dell systems with BitLocker enabled](#).

 **CAUTION:** Do not turn off the computer during the BIOS flash update process. The computer may not boot if you turn off your computer.

#### Steps

1. Go to [Dell Support Site](#).
2. Go to **Identify your product or ask support**. In the box, enter the product identifier, model, service request or describe what you are looking for, and then click **Search**.  
 **NOTE:** If you do not have the Service Tag, click **Detect This PC**. The site automatically detects your device, and you can then click **Explore Product Support** to go to the support page for your device. You can also use the product ID or manually browse for your computer model.
3. Click **Drivers & Downloads**.
4. Select the operating system installed on your computer.
5. In the **Category** drop-down list, select **BIOS**.
6. Select the latest version of BIOS, and click **Download** to download the BIOS file for your computer.
7. Create a bootable USB drive. For more information, search [Dell Support Site](#).
8. Copy the BIOS setup program file to the bootable USB drive.

9. Connect the bootable USB drive to the computer that needs the BIOS update.
10. Restart the computer and press **F12**.
11. Select the USB drive from the **One Time Boot Menu**.
12. Type the BIOS setup program filename and press **Enter**.  
The **BIOS Update Utility** appears.
13. Follow the on-screen instructions to complete the BIOS update.

## Updating the BIOS from the One-Time boot menu

To update the BIOS from the One-Time boot menu, see [Updating the BIOS from the One Time Boot Menu](#) at [Dell Support Site..](#)

## System and setup password

 **CAUTION:** The password features provide a basic level of security for the data on your computer.

 **CAUTION:** Ensure that your computer is locked when it is not in use. Anyone can access the data that is stored on your computer, when left unattended.

**Table 54. System and setup password**

Password type	Description
System password	Password that you must enter to boot to your operating system.
Setup password	Password that you must enter to access and change the BIOS settings of your computer.

You can create a system password and a setup password to secure your computer.

 **NOTE:** The System and setup password feature is disabled by default.

## Assigning a System Setup password

### Prerequisites

You can assign a new System or Admin Password only when the status is set to **Not Set**. To enter BIOS System Setup, press F2 immediately after a power-on or reboot.

### Steps

1. To enter the **System Setup**, press **F2** immediately after a power-on or reboot.
2. In the **System BIOS** or **System Setup** screen, select **Security** and press Enter.  
The **Security** screen is displayed.
3. Select **System/Admin Password** and create a password in the **Enter the new password** field.  
Use the following guidelines to create the system password:
  - Password can be up to 32 characters.
  - Password must contain at least one special character: "(!"#\$%&'\*+, -./:;<=>?@[\]^\_`{|})"
  - The password can contain numbers from 0 to 9.
  - The password can contain alphabets A to Z and a to z.
4. Type the system password that you entered earlier in the **Confirm new password** field and click **OK**.
5. Press Y to save the changes.  
The computer restarts.

# Deleting or changing an existing system password or setup password

## Prerequisites

Ensure that the **Password Status** is Unlocked in the System Setup before attempting to delete or change the existing system password and/or setup password. You cannot delete or change an existing system password or setup password if the **Password Status** is Locked. To enter the System Setup, press F2 immediately after a power-on or reboot.

## Steps

1. To enter the **System Setup**, press **F2** immediately after a power-on or reboot.
2. In the **System BIOS** or **System Setup** screen, select **System Security** and press Enter. The **System Security** screen is displayed.
3. In the **System Security** screen, verify that the **Password Status** is Unlocked.
4. Select **System Password**. Update or delete the existing system password, and press Enter or Tab.
5. Select **Setup Password**. Update or delete the existing setup password, and press Enter or Tab.

 **NOTE:** If you change the system password and/or setup password, reenter the new password when prompted. If you delete the system password and/or setup password, confirm the deletion when prompted.

6. Press Esc. A message prompts you to save the changes.
7. Press Y to save the changes and exit from **System Setup**.  
The computer restarts.

# Clearing system and setup passwords

## About this task

To clear the system or setup passwords, contact Dell technical support as described at [Contact Support](#).

 **NOTE:** For information about how to reset Windows or application passwords, see the documentation accompanying Windows or your application.

# Troubleshooting

## Handling swollen rechargeable Li-ion batteries

Like most laptops, Dell laptops use Lithium-ion batteries. One type of Lithium-ion battery is the rechargeable Li-ion battery. Rechargeable Li-ion batteries have increased in popularity in recent years and have become a standard in the electronics industry due to customer preferences for a slim form factor (especially with newer ultra-thin laptops) and long battery life. Inherent to rechargeable Li-ion battery technology is the potential for swelling of the battery cells.

A swollen battery may impact the performance of the laptop. To prevent possible further damage to the device enclosure or internal components leading to malfunction, discontinue the use of the laptop and discharge it by disconnecting the AC adapter and letting the battery drain.

Swollen batteries should not be used and must be replaced and disposed of properly. We recommend contacting Dell Support for options to replace a swollen battery under the terms of the applicable warranty or service contract, including options for replacement by a Dell authorized service technician.

The guidelines for handling and replacing rechargeable Li-ion batteries are as follows:

- Exercise caution when handling rechargeable Li-ion batteries.
- Discharge the battery before removing it from the laptop. To discharge the battery, unplug the AC adapter from the computer and operate the computer only on battery power. The battery is fully discharged when the computer no longer turns on when the power button is pressed.
- Do not crush, drop, mutilate, or penetrate the battery with foreign objects.
- Do not expose the battery to high temperatures, or disassemble battery packs and cells.
- Do not apply pressure to the surface of the battery.
- Do not bend the battery.
- Do not use tools of any type to pry on or against the battery.
- If a battery gets stuck in a device as a result of swelling, do not try to free it as puncturing, bending, or crushing a battery can be dangerous.
- Do not attempt to reassemble a damaged or swollen battery into a laptop.
- Swollen batteries that are covered under warranty should be returned to Dell in an approved shipping container (provided by Dell)—this is to comply with transportation regulations. Swollen batteries that are not covered under warranty should be disposed of at an approved recycling center. Contact Dell Support at [Dell Support Site](#) for assistance and further instructions.
- Using a non-Dell or incompatible battery may increase the risk of fire or explosion. Replace the battery only with a compatible battery purchased from Dell that is designed to work with your Dell computer. Do not use a battery from other computers with your computer. Always purchase genuine batteries from [Dell Site](#) or otherwise directly from Dell.

Rechargeable Li-ion batteries can swell for various reasons such as age, number of charge cycles, or exposure to high heat. For more information about how to improve the performance and lifespan of the laptop battery and to minimize the possibility of occurrence of the issue, search Dell laptop battery at [Dell Support Site](#).

## Dell SupportAssist Pre-boot System Performance Check diagnostics

### About this task

SupportAssist diagnostics (also known as system diagnostics) performs a complete check of your hardware. The Dell SupportAssist Pre-boot System Performance Check diagnostics is embedded within the BIOS and launched by the BIOS internally. The embedded system diagnostics provides options for particular devices or device groups allowing you to:

- Run tests automatically or in an interactive mode.
- Repeat the tests.
- Display or save test results.
- Run thorough tests to add more options and obtain details about any failed devices.

- View status messages that inform you when the tests are completed successfully.
- View error messages that inform you of problems encountered during testing.

**(i) NOTE:** Some tests for specific devices require user interaction. Always ensure that you are present at the computer when the diagnostic tests are performed.

For more information, see [How to Run Dell Preboot Diagnostics and Hardware Tests on Your Dell Computer](#).

## Running the SupportAssist Pre-Boot System Performance Check

### Steps

1. Turn on your computer.
2. As the computer boots, press the F12 key.
3. On the boot menu screen, select **Diagnostics**.  
The diagnostic quick test begins.
4. If there are any issues, error codes are displayed.  
Note the error code and validation number and contact Dell.

**(i) NOTE:** For more information about running the SupportAssist Pre-Boot System Performance Check on a specific device, see [Dell Support Site](#).

## Built-in self-test (BIST)

### Motherboard Built-In Self-Test (M-BIST)

M-BIST is the system board onboard self-test diagnostics tool that improves the diagnostics accuracy of system board Embedded Controller (EC) failures.

**(i) NOTE:** M-BIST can be manually initiated before Power On Self-Test (POST).

### How to run M-BIST

**(i) NOTE:** Before initiating M-BIST, ensure that the computer is in a power-off state.

1. Press and hold both the **M** key and the power button to initiate M-BIST.
2. The battery-status light may exhibit two states:
  - Off: No fault was detected.
  - Amber and White: Indicates a problem with the system board.
3. If there is a failure with the system board, the battery-status light flashes one of the following error codes for 30 seconds:

**Table 55. LED error codes**

Blinking Pattern		Possible Problem
Amber	White	
2	1	CPU Failure
2	8	LCD Power Rail Failure
1	1	TPM Detection Failure
2	4	Memory/RAM failure

4. If there is no failure with the system board, the LCD cycles through the solid color screens (that are described in the LCD-BIST) for 30 seconds and then turn off.

## Logic Built-in Self-test (L-BIST)

L-BIST is an enhancement to the single LED error code diagnostics and is automatically initiated during POST. L-BIST will check the LCD power rail. If there is no power being supplied to the LCD (that is if the L-BIST circuit fails), the battery status LED flashes either an error code [2,8] or an error code [2,7].

**i|NOTE:** If L-BIST fails, LCD-BIST cannot function as no power will be supplied to the LCD.

### How to invoke the L-BIST

1. Turn on your computer.
2. If the computer does not start up normally, look at the battery status LED:
  - If the battery status LED flashes an error code [2,7], the display cable may not be connected properly.
  - If the battery status LED flashes an error code [2,8], there is a failure on the LCD power rail of the system board, hence there is no power that is supplied to the LCD.
3. For cases, when a [2,7] error code is shown, check to see if the display cable is properly connected.
4. For cases when a [2,8] error code is shown, replace the system board.

## LCD Built-in Self-Test (LCD-BIST)

Dell laptops have a built-in diagnostic tool that helps you determine if the screen abnormality you are experiencing is an inherent problem with the LCD (screen) of the Dell laptop or with the video card (GPU) and computer settings.

When you notice screen abnormalities like flickering, distortion, clarity issues, fuzzy or blurry image, horizontal or vertical lines, color fade, it is always a good practice to isolate the LCD (screen) by running the LCD-BIST.

### How to invoke the LCD-BIST

1. Turn off your computer.
2. Disconnect any peripherals that are connected to the computer. Connect only the AC adapter (charger) to the computer.
3. Ensure that the LCD (screen) is clean (no dust particles on the surface of the screen).
4. Press and hold the **D** key and press the power button to enter LCD-BIST mode. Continue to hold the **D** key until the computer boots up.
5. The screen displays solid colors and changes colors on the entire screen to white, black, red, green, and blue twice.
6. Then it displays the colors white, black, and red.
7. Carefully inspect the screen for abnormalities (any lines, fuzzy color, or distortion on the screen).
8. At the end of the last solid color (red), the computer shuts down.

**i|NOTE:** Dell SupportAssist Preboot diagnostics upon launch initiates an LCD-BIST first, expecting a user intervention to confirm functionality of the LCD.

## System-diagnostic lights

This section lists the system-diagnostic lights of your Dell Pro Max 16 MC16255.

The following table shows different Service LED blinking patterns and associated problems. The diagnostic light codes consist of a two-digit number, and the digits are separated by a comma. The number stands for a blinking pattern; the first digit shows the number of blinks in amber color, and the second digit shows the number of blinks in white color. The Service LED blinks in the following manner:

- The Service LED blinks the number of times equal to the value of the first digit and turns off with a short pause.
- After that, the Service LED blinks the number of times equal to the value of the second digit.
- The Service LED turns off again with a longer pause.
- After the second pause, the blinking pattern will be repeated.

**Table 56. Diagnostic light codes**

Diagnostic light codes (Amber, White)	Problem description
1, 1	TPM detection failure
1, 2	Unrecoverable SPI Flash failure
1, 5	EC unable to program i-Fuse
1, 6	Generic catch-all for ungraceful EC code flow errors
1, 7	Non-RPMC Flash on Boot Guard fused system
1, 8	Chipset "Catastrophic Error" signal has tripped
2, 1	Processor configuration or processor failure
2, 2	System board: BIOS or Read-Only Memory (ROM) failure
2, 3	System board: No memory or Random-Access Memory (RAM) detected
2, 4	System board: Memory or Random-Access Memory (RAM) failure
2, 5	System board: Invalid memory installed
2, 6	System board/chipset error
2, 7	Display failure SBIOS message
2, 8	Display power-rail failure on the system board
3, 1	CMOS battery failure
3, 2	PCI of Video card/chip failure
3, 3	Recovery image not found
3, 4	Recovery image found but invalid
3, 5	EC power-rail error
3, 6	Flash corruption detected by SBIOS
3, 7	Timeout waiting on ME to reply to HECL message
4, 1	Memory DIMM power rail failure
4, 3	Display panel failure (potentially cracked panel)
4, 4	Power rail failure at system board side
4, 5	Display panel failure and power rail failure at system board side
4, 6	Display cable failure

## Recovering the operating system

When your computer is unable to boot to the operating system even after repeated attempts, it automatically starts Dell SupportAssist OS Recovery.

Dell SupportAssist OS Recovery is a stand-alone tool that is preinstalled on Dell computers running the Windows operating system. It consists of tools to diagnose and troubleshoot issues that may occur before your computer boots to the operating system. It enables you to diagnose hardware issues, repair your computer, back up your files, and restore your computer to its factory state.

You can also download it from the Dell Support website to troubleshoot and fix your computer when it fails to boot into the primary operating system due to software or hardware failures.

For more information about the Dell SupportAssist OS Recovery, see *Dell SupportAssist OS Recovery User's Guide* at [Serviceability Tools at the Dell Support Site](#). Click **SupportAssist** and then click **SupportAssist OS Recovery**.

 **NOTE:** Windows 11 IoT Enterprise LTSC 2024 and Dell ThinOS 10 do not support Dell SupportAssist. For more information about recovering ThinOS 10, see [Recovery mode using R-Key](#).

## Real-Time Clock (RTC Reset)

The Real-Time Clock (RTC) reset function enables you or the service technician to recover Dell computers from No POST/No Power/No Boot situations.

Start the RTC reset with the computer powered off and connected to AC power. Press and hold the power button for twenty-five seconds. The computer RTC Reset occurs after you release the power button.

## Backup media and recovery options

It is recommended to create a recovery drive to troubleshoot and fix problems that may occur with Windows. Dell provides multiple options for recovering the Windows operating system on your Dell computer. For more information, see [Dell Windows Backup Media and Recovery Options](#).

## Network power cycle

### About this task

If your computer is unable to access the Internet due to network connectivity issues, reset your network devices by performing the following steps:

#### Steps

1. Turn off the computer.
2. Turn off the modem.  
 **NOTE:** Some Internet service providers (ISPs) provide a modem and router combo device.
3. Turn off the wireless router.
4. Wait for 30 seconds.
5. Turn on the wireless router.
6. Turn on the modem.
7. Turn on the computer.

## Drain flea power (perform hard reset)

### About this task

Flea power is the residual static electricity that remains in the computer even after it has been powered off and the battery is removed.

For your safety, and to protect the sensitive electronic components in your computer, you must drain residual flea power before removing or replacing any components in your computer.

Draining flea power, also known as a performing a "hard reset," is also a common troubleshooting step if your computer does not turn on or boot into the operating system.

Perform the following steps to drain the flea power:

#### Steps

1. Turn off the computer.
2. Disconnect the power adapter from the computer.
3. Remove the base cover.
4. Remove the battery.

 **CAUTION:** The battery is a Field Replaceable Unit (FRU) and the removal and installation procedures are intended for authorized service technicians only.

5. Press and hold the power button for 20 seconds to drain the flea power.
6. Install the battery.
7. Install the base cover.
8. Connect the power adapter to the computer.
9. Turn on the computer.

 **NOTE:** For more information about performing a hard reset, go to [Dell Support Site](#). On the menu bar at the top of the Support page, select Support > Support Library. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

# Getting help and contacting Dell

## Self-help resources

You can get information and help on Dell products and services using these self-help resources:

**Table 57. Self-help resources**

Self-help resources	Resource location
Information about Dell products and services	<a href="#">Dell Site</a>
Contact Support	In Windows search, type <b>Contact Support</b> , and press <b>Enter</b> .
Online help for operating system	<a href="#">Windows Support Site</a> <a href="#">Linux Support Site</a>
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at <a href="#">Dell Support Site</a> .  For more information about how to find the Service Tag for your computer, see <a href="#">Locate the Service Tag on your computer</a> .
Dell knowledge base articles	<ol style="list-style-type: none"> <li>1. Go to <a href="#">Dell Support Site</a>.</li> <li>2. On the menu bar at the top of the Support page, select <b>Support &gt; Support Library</b>.</li> <li>3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.</li> </ol>

## Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [Dell Support Site](#).

 **NOTE:** Availability of the services may vary depending on the country or region, and product.

 **NOTE:** If you do not have an active Internet connection, you can find contact information in your purchase invoice, packing slip, bill, or Dell product catalog.

## Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

**Table 58. Revision history**

Revision	Date	Description
A00	07-17-2025	Original publish date.
A01	07-28-2025	<ul style="list-style-type: none"><li>• Moved battery cable removal and installation section from FRU to CRU.</li><li>• Updated CRU/FRU table.</li></ul>
A02	12-12-2025	<ul style="list-style-type: none"><li>• Updated the memory specifications.</li><li>• Added new display specifications.</li></ul>
A03	12-15-2025	<ul style="list-style-type: none"><li>• Updated the System-diagnostic lights topic.</li><li>• Updated the removal and installation topics of the system board.</li></ul>